
**Mechanical vibration and shock —
Evaluation of human exposure
to whole-body vibration —**

**Part 1:
General requirements**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

*Vibrations et chocs mécaniques — Évaluation de l'exposition des
individus à des vibrations globales du corps —*

<https://standards.iteh.ai/en/standards/iso-2631-1-1997-amd-1-2010>
[Partie 1: Spécifications générales](https://standards.iteh.ai/en/standards/iso-2631-1-1997-amd-1-2010)
78cf60d653b0/iso-2631-1-1997-amd-1-2010
AMENDEMENT 1



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 2631-1:1997/Amd 1:2010](https://standards.iteh.ai/catalog/standards/sist/cba6ec30-3117-45ab-844f-78cf60d653b0/iso-2631-1-1997-amd-1-2010)

<https://standards.iteh.ai/catalog/standards/sist/cba6ec30-3117-45ab-844f-78cf60d653b0/iso-2631-1-1997-amd-1-2010>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

Amendment 1 to ISO 2631-1:1997 was prepared by Technical Committee ISO/TC 108, *Mechanical vibration, shock and condition monitoring*, Subcommittee SC 4, *Human exposure to mechanical vibration and shock*.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 2631-1:1997/Amd 1:2010](https://standards.iteh.ai/catalog/standards/sist/cba6ec30-3117-45ab-844f-78cf60d653b0/iso-2631-1-1997-amd-1-2010)

<https://standards.iteh.ai/catalog/standards/sist/cba6ec30-3117-45ab-844f-78cf60d653b0/iso-2631-1-1997-amd-1-2010>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 2631-1:1997/Amd 1:2010

<https://standards.iteh.ai/catalog/standards/sist/cba6ec30-3117-45ab-844f-78cf60d653b0/iso-2631-1-1997-amd-1-2010>

Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration —

Part 1: General requirements

AMENDMENT 1

Page iv, Foreword

Replace the title of Part 2 with:

- *Part 2: Vibration in buildings (1 Hz to 80 Hz)*

Add the following parts:

- *Part 4: Guidelines for the evaluation of the effects of vibration and rotational motion on passenger and crew comfort in fixed-guideway transport systems*
- *Part 5: Method for evaluation of vibration containing multiple shocks*

<https://standards.iteh.ai/catalog/standards/sist/cba6ec30-3117-45ab-844f-78cf60d653b0/iso-2631-1-1997-amd-1-2010>
 ISO 2631-1:1997/Amd 1:2010

Page v, Foreword

Replace last sentence of 2nd paragraph with the following:

Additional or alternative measurement procedures are presented for vibration with occasional but substantial peaks and particularly for crest factors greater than 9. ISO 2631-5 provides an alternative assessment method for exposures dominated by multiple shocks in relation to health of the lumbar spine.

Page 1, Clause 2

Replace this clause with the following:

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2041, *Mechanical vibration, shock and condition monitoring — Vocabulary*

ISO 5805, *Mechanical vibration and shock — Human exposure — Vocabulary*

ISO 8041, *Human response to vibration — Measuring instrumentation*

IEC 61260, *Electroacoustics — Octave-band and fractional-octave-band filters*


Page 2, 4.1

Add, as the first item in the list, the following:

- A(8) Daily vibration exposure normalized to a reference period of 8 h

Page 3, Figure 1 a)

To correct the direction of pitch, replace this figure with the following:

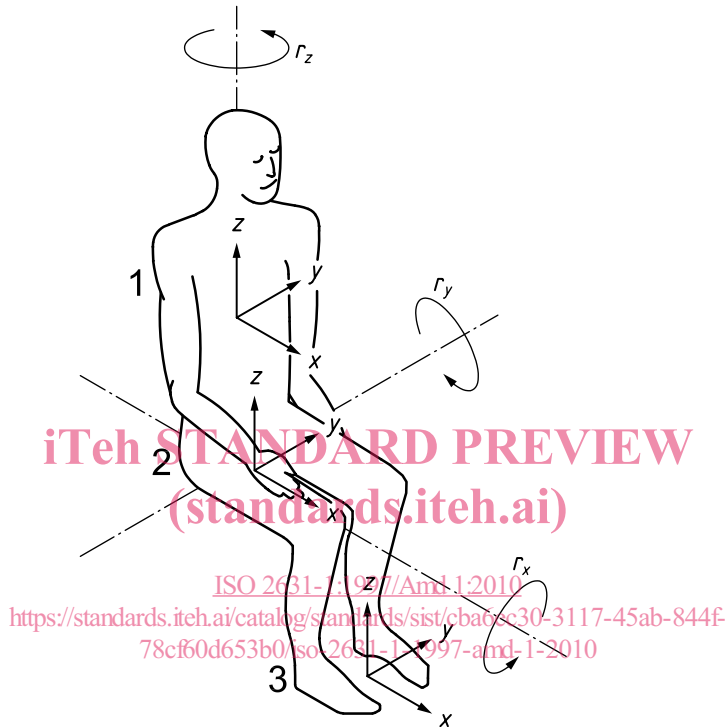

Key

- | | | | |
|---|--------------|-------|-------|
| 1 | seat-back | r_x | roll |
| 2 | seat-surface | r_y | pitch |
| 3 | feet | r_z | yaw |

a) Seated position

Page 6, 6.2.1

Number the Note as Note 1 and add after it:

NOTE 2 Experience has shown that the crest factor can increase with measurement duration for stationary signals, as the probability of measuring a larger peak is greater.

Page 6, 6.3

Add the following sentence to the end of the paragraph:

In addition, when the vibration contains multiple shocks and the concern is the health of the lumbar spine, the evaluation method described in ISO 2631-5 may be considered.

Page 7, Table 3

In the 5th column, on the row headed "Frequency 10 Hz", replace "212" by "202".

In footnote 1), replace "IEC 1260" by "IEC 61260".

Delete Note 2.

Page 8, Table 4

In footnote 1), replace "IEC 1260" by "IEC 61260".

Delete Note 2.

Page 10, 6.3.3

Replace the 1st paragraph by:

It has been shown that use of the additional evaluation methods is important for the judgement of the effects of vibration on human beings when the following approximate ratios are exceeded (depending on which additional method is being used) for evaluating health or comfort:

Add the following Note after Equation (8):

NOTE These ratios do not indicate the severity of vibration. The ratios are designed to indicate the degree of impulsiveness in the measured vibration signal.

[ISO 2631-1:1997/Amd 1:2010](https://standards.iteh.ai/catalog/standards/sist/cba6ec30-3117-45ab-844f-78cf60d653b0/iso-2631-1-1997-amd-1-2010)

<https://standards.iteh.ai/catalog/standards/sist/cba6ec30-3117-45ab-844f-78cf60d653b0/iso-2631-1-1997-amd-1-2010>

Page 10, 6.4.1

Modify the end of the 3rd paragraph to read "... for horizontal recumbent directions."

Page 11, Figures 2 and 3

Add at the end of the figure captions "(schematic)".

Page 12, 6.4.1.2

Replace the paragraph by the following:

For tolerances, see ISO 8041.

Page 12, 6.4.2

At the end of the 1st paragraph, replace "IEC 1260" by "IEC 61260".

In Equation (9) and its explanation, replace W_i by w_i .

Page 13, 7.1

Add the following Note after paragraph 1:

NOTE Assessment of the effects of vibration on the health of those exposed while standing, reclining or recumbent is usually carried out using the same evaluation method as for seated persons.

Delete the existing Note after paragraph 2.

Pages 13 and 14, 7.2.2 and 7.2.3

Replace 7.2.2 and 7.2.3 with the following:

7.2.2 The frequency weightings shall be applied for seated persons as follows with the factors k as indicated

x -axis: W_d , $k = 1,4$

y -axis: W_d , $k = 1,4$

z -axis: W_k , $k = 1$

NOTE Measurements in the x -axis on the backrest using frequency weighting W_c with $k = 0,8$ are encouraged. However, considering the shortage of evidence showing the effect of this motion on health, it is not included in the assessment of the vibration severity given in Annex B.

7.2.3 Assessment of the exposure to vibration can be based on the calculation of daily vibration exposure $A(8)$, expressed as equivalent continuous acceleration over a period of 8 h.

The daily vibration exposure $A_l(8)$ in metres per second squared for each direction l is defined as:

$$A_l(8) = k_l \sqrt{\frac{1}{T_0} \sum_i a_{wli}^2 T_i}$$

where

a_{wli} is the frequency-weighted r.m.s. value of the acceleration, determined over the time period T_i ;

$l = x, y, z$;

$k_x = k_y = 1,4$ for the x - and y -directions; $k_z = 1$ for the z -direction;

T_0 is the reference duration of 8 h (28 800 s).

If an operator is exposed to vibration from more than one source, or vibration which varies in magnitude throughout the day, exposures for each separate axis shall be calculated by combining the accelerations from each exposure axis by axis.

NOTE For measurement and calculation of the daily vibration exposure, $A(8)$, in a working environment, see, for example, EN 14253. The results are compared to legal limit values as given, for example, in the European Directive 2002/44/EC.

7.2.4 The assessment of the effect of a vibration on health shall be made independently along each axis. The assessment of the vibration shall be made with respect to the highest frequency-weighted acceleration determined in any axis on the seat pan.

NOTE When vibration in two or more axes is comparable, the vibration total value (root-sum-of-squares) is sometimes used as an additional estimate of health risk.

Page 14, 8.2.2.1

In Note 2 on page 15, replace “A further part to this International Standard (currently in preparation)” by “ISO 2631-4”.

Pages 21 to 23, B.3.1

After the 2nd paragraph, insert the following paragraph:


The dashed lines are defined as having values of 3 m/s² and 6 m/s² for exposures less than 10 min and values of 0,25 m/s² and 0,5 m/s² at 24 h.

In the 3rd paragraph, replace the last sentence by the following:

The validity of the results outside the range 4 h to 8 h is uncertain as the two zones diverge. Short durations should be treated with extreme caution.

In the 5th paragraph, replace “dotted” by “solid”.

Replace Figure B.1 with the following:

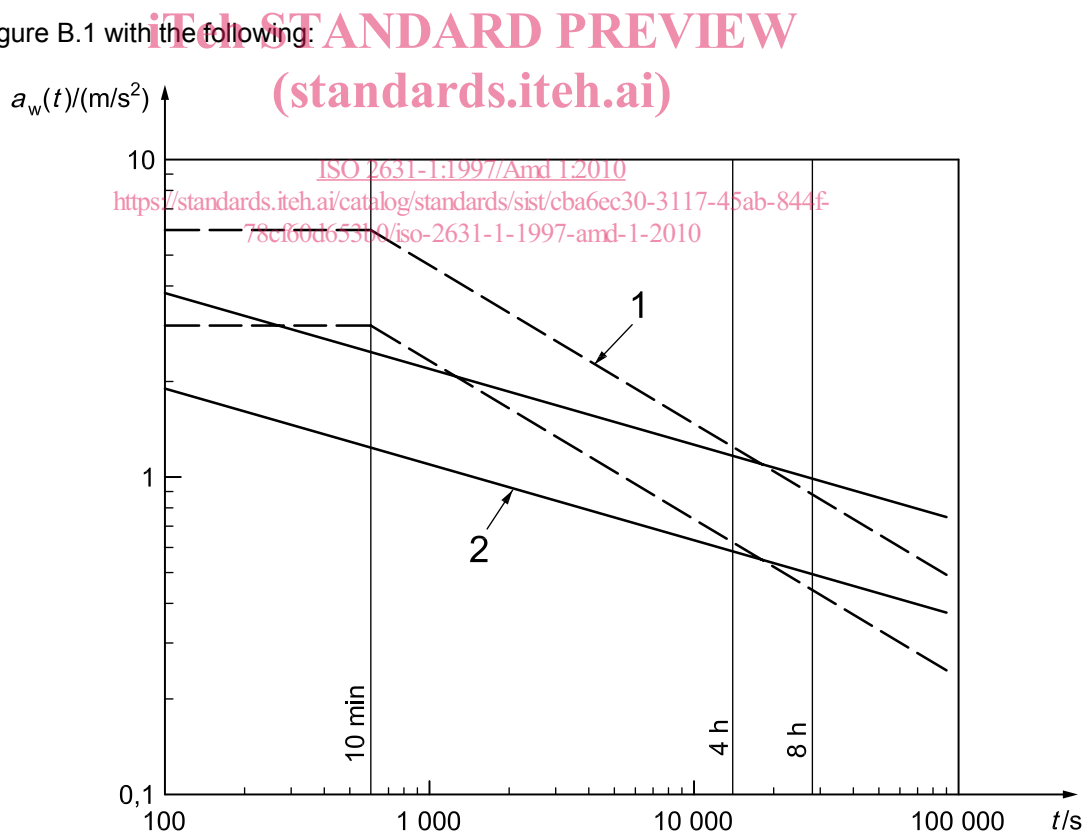

Key

- | | | | |
|----------|---|---|----------------|
| $a_w(t)$ | weighted acceleration, common logarithmic scale | 1 | Equation (B.1) |
| t | exposure duration, common logarithmic scale | 2 | Equation (B.2) |

Figure B.1 — Health guidance caution zones