
**Powered industrial trucks and tractors —
Brake performance — Determination of
measurement procedures**

*Chariots de manutention et tracteurs industriels automoteurs —
Capacité de freinage — Détermination des modes opératoires de
mesure*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TR 29944:2010](https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010)

<https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TR 29944:2010

<https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Technical considerations	2
4.1 General	2
4.2 Research.....	2
4.3 Determination of formulas	6
5 Conclusion	10
Annex A (informative) Timing responses during stopping (from ISO 611).....	11
Annex B (informative) Truck deceleration against velocity (from ISO 6292:1996).....	12
Annex C (informative) Truck deceleration — Group C.....	13
Bibliography.....	14

iTeh STANDARD PREVIEW

(standards.iteh.ai)

[ISO/TR 29944:2010](https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010)

<https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

In exceptional circumstances, when a technical committee has collected data of a different kind from that which is normally published as an International Standard ("state of the art", for example), it may decide by a simple majority vote of its participating members to publish a Technical Report. A Technical Report is entirely informative in nature and does not have to be reviewed until the data it provides are considered to be no longer valid or useful.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO/TR 29944 was prepared by Technical Committee ISO/TC 110, *Industrial trucks*, Subcommittee SC 2, *Safety of powered industrial trucks*.

<https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010>

Introduction

The first edition of ISO 6292, published in 1996, defined two types of measurement method for verifying the brake performance of an industrial truck:

- drawbar drag measurement (DBD);
- truck deceleration measurement.

DBD is specified in the US standard ANSI/ITSDF B56.1 [1] and the Australian standard AS 2359-1 [2].

Both measurement methods verify braking force, each method differently. Both have inherent disadvantages, insofar as neither caters for brake system features that extend the stopping distance, i.e. initial response time and braking force build-up time, or state-of-the-art such as regenerative braking systems or other systems with a significant relationship between velocity of the truck and brake force.

ISO 6292:1996 also allowed for other methods or procedures for the assessment of brake performance, including the use of an accelerometer and chassis dynamometer, provided they gave equivalent accuracy. Nevertheless, it provided no further guidance or specification in relation to these. The first edition of ISO 6292 also permitted the use of stopping distance as a measurement method; however, it did not define any further basis for using that method.

International Standards such as ISO 3450 [3] and national/regional regulations such as EU Directive 71/320/EEC [4] describe the measurement of stopping distance as a means of verifying the braking performance of the vehicle. While ANSI/ITSDF B56.1 does specify a formula for determining stopping distance, it does not take into account the brake system reaction time.

In light of the above, an ad-hoc group was established within ISO/TC 110/SC 2/WG 7 to revise ISO 6292 with the objective of establishing stopping distance as a further measurement method. It was recognized that the determination of stopping distance needs to include the brake system reaction time, but not the human reaction time. In order to ensure widespread acceptance of the revised International Standard, it was also decided that the drawbar drag method should be maintained, subject to that method's ability to reproduce results of equivalent accuracy.

This Technical Report analyses the above-mentioned methods and explains the determination of the values used in the second edition, ISO 6296:2008, to calculate stopping distance and drawbar drag. Because a detailed description of all aspects within that International Standard was not possible, for the purposes of this Technical Report it was decided to summarize the determination of ISO 6292 requirements.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TR 29944:2010

<https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010>

Powered industrial trucks and tractors — Brake performance — Determination of measurement procedures

1 Scope

This Technical Report describes the selection and calculation of the stopping distance and braking force used in the application of ISO 6292.

It does not cover test procedures, control forces or component strengths.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 611, *Road vehicles — Braking of automotive vehicles and their trailers — Vocabulary*

ISO 6292:2008, *Powered industrial trucks and tractors — Brake performance and component strength*

[ISO/TR 29944:2010](https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010)

[https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-](https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010)

[5372ec9b4782/iso-tr-29944-2010](https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010)

3 Terms and definitions

For the purpose of this document, the terms and definitions given in ISO 611 and the following apply.

3.1 stopping distance

s_0

distance travelled by the truck during the total braking time, from the instant when the driver begins to actuate the control device until the instant when the truck stops

3.2 brake reaction distance

s_r

distance travelled by the truck during the time from the instant when the driver begins to actuate the control device until the instant when the two vehicle speed straight lines (truck velocity while travelling and decreasing velocity while braking with mean fully deceleration) intersect

3.3 braking distance

s_b

distance travelled by the truck during the time from the instant when the two vehicle speed straight lines (truck velocity while travelling, and decreasing velocity while braking with mean full deceleration) intersect until the instant when the truck stops

4 Technical considerations

4.1 General

The objectives in revising ISO 6292 were to

- introduce the stopping distance (SD) measurement method,
- maintain the figures for mean deceleration (Groups A1, A2, B1) fixed by the first edition,
- establish a new definition of deceleration for Group C, the justification being that the requirements of ISO 6292 and ANSI/ITSDF B56.1 were not aligned,
- maintain drawbar drag measurement (DBD) as a method,
- define state-of-the-art brake reaction time (BRT), and
- enable calculation of the limiting values of SD and DBD in an easy and unmistakable way.

4.2 Research

In order to establish a basis for the preparation of a revised ISO 6292, several tests were performed.

4.2.1 Stopping distance measurement

The task was to determine the stopping distance of a wide range of industrial trucks. The SD method was carried out on standard-production trucks. The trucks were confirmed as meeting the requirements of ISO 6292:1996.

The following truck types were tested.

a) Electric counterbalanced trucks

The service brake system was an electrical brake system or a friction-type system (drum brakes).

b) Order-picking trucks (horizontal and vertical) and pedestrian-propelled stacking trucks

The service brake system was an electrical brake system.


c) Reach trucks

The service brake system was a friction-type system (drum brakes).

d) IC trucks

The service brake system was a friction-type system (drum brakes) or hydrostatic transmission system.

Measurement data on SD was obtained from trucks in the USA, Japan and Germany. Figure 1 shows a summary of the results.

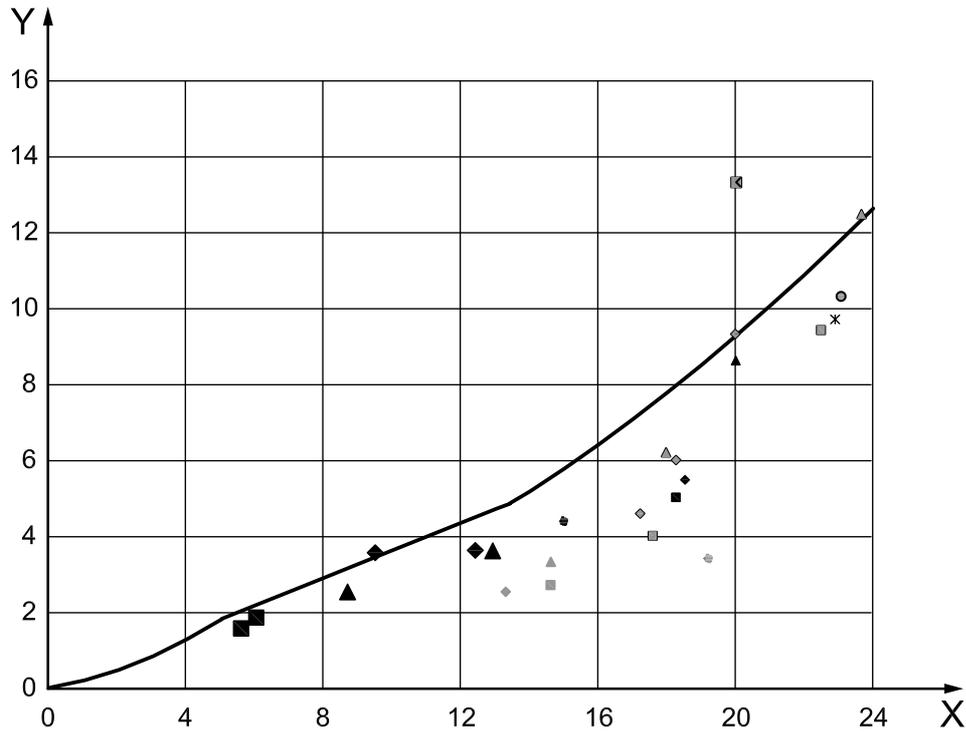

Key

X truck velocity, km/h
 Y SD, m

iTeh STANDARD PREVIEW
(standards.iteh.ai)

- ◆ Electric 1.6t
- Electric 2t
- ▲ Electric 2t (F)
- Electric 3t
- ◆ IC drum brakes 2,5t (A)
- IC drum brakes 2,5t (D)
- ▲ IC drum brakes 2,5t (B)
- IC drum brakes 2,5t (C)
- ◇ IC drum brakes 3t
- IC drum brakes 3,2t (power ass.)
- ▲ IC drum brakes 4t
- ◆ IC drum brakes 16t (1)
- IC drum brakes 16t (2)
- ◇ IC Hydrostat 1.6t
- IC Hydrostat 2.5t
- △ IC Hydrostat 3t
- IC Hydrostat 5t
- × IC Hydrostat 8t
- ◆ Order picker
- Pedestrian propelled stacking truck
- ▲ Reach Truck drum brake
- ISO 6292 A1 (BRT 0,54 s)

<https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010>

Figure 1 — Stopping distance

The following insights were gained when performing the examination:

- the brake force needs to be controllable in a sensitive way to avoid loss of load;
- tests showed that a too-high deceleration rate would not improve safety because during high deceleration hazardous situations such as load movement, instability and loss of load are more likely to occur and therefore the maximum deceleration of the truck needs to be limited;
- truck adjustment optimized for safe truck handling limited the deceleration value of some of the tested trucks.

4.2.2 Brake reaction time

The second task was to determine the characteristic brake reaction time of industrial trucks.

Measurement data on actual BRT was obtained from trucks in the USA, Japan and Germany.


The BRT was measured in accordance with ISO 611, which states the difference between t_0 (instant when the control device is actuated) and t_4 (instant when the vehicle speed straight lines intersect).

This research produced widely varying brake reaction times. Figure 2 is a summary of the results and shows the range of BRT for different trucks.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/TR 29944:2010](https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010)

<https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010>

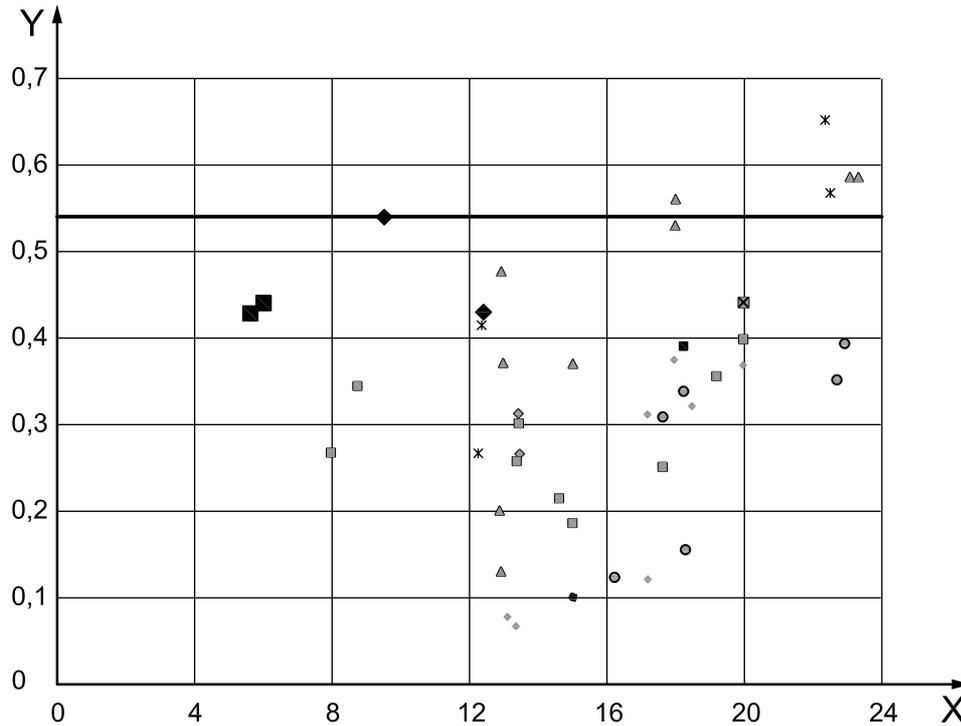

Key

X truck velocity, km/h
 Y BRT, s

- ◆ Electric 1.6t
- Electric 2t
- ▲ Electric 2t (F)
- Electric 3t
- ◆ IC drum brakes 2,5t (A)
- IC drum brakes 2,5t (D)
- ▲ IC drum brakes 2,5t (B)
- IC drum brakes 2,5t (C)
- ◆ IC drum brakes 3t
- IC drum brakes 3,2t (power ass.)
- ▲ IC drum brakes 4t
- ◆ IC drum brakes 16t (1)
- IC drum brakes 16t (2)
- ◇ IC Hydrostat 1.6t
- IC Hydrostat 2.5t
- △ IC Hydrostat 3t
- IC Hydrostat 5t
- × IC Hydrostat 8t
- ◆ Order picker
- Pedestrian propelled stacking truck
- ▲ Reach truck drum brake
- Proposed BRT

iTeh STANDARD PREVIEW
 (standards.iteh.ai)

ISO/TR 29944:2010
<https://standards.iteh.ai/catalog/standards/sist/e537613d-9b82-441e-9bdd-5372ec9b4782/iso-tr-29944-2010>

Figure 2 — Brake reaction time (BRT)

NOTE EU Directive 71/320/EEC states values for cars of 0,36 s and for lorries 0,54 s. Based on a similar design of braking components for industrial trucks, engineering knowledge, and measured test data, the formulas given below utilize 0,54 s as a BRT basis for the stopping distance formulas.