
**Rubber — Tolerances for products —
Part 2:
Geometrical tolerances**

Caoutchouc — Tolérances pour produits —

Partie 2: Tolérances géométriques

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3302-2:2008

<https://standards.iteh.ai/catalog/standards/sist/6899f413-af97-4f69-96c3-cafa476dac55/iso-3302-2-2008>



Reference number
ISO 3302-2:2008(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 3302-2:2008

<https://standards.iteh.ai/catalog/standards/sist/6899f413-af97-4f69-96c3-cafa476dac55/iso-3302-2-2008>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Classes of tolerances	1
4 Measurement of dimensions	2
4.1 General	2
4.2 Test instruments	2
5 Flatness tolerance	2
6 Parallelism tolerance	3
6.1 Sandwich structure (rubber between two metal plates)	3
6.2 Extruded-product cut section (e.g. lathe-cut rings)	4
7 Perpendicularity tolerance	5
8 Coaxiality tolerance	5
8.1 Moulded products	5
8.2 Mandrel-supported extruded products	7
8.3 Rotating parts	7
9 Positional tolerances	8

[ISO 3302-2:2008](https://standards.iteh.ai/catalog/standards/sist/6899f413-af97-4f69-96c3-cafa476dac55/iso-3302-2-2008)

<https://standards.iteh.ai/catalog/standards/sist/6899f413-af97-4f69-96c3-cafa476dac55/iso-3302-2-2008>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3302-2 was prepared by Technical Committee ISO/TC 45, *Rubber and rubber products*, Subcommittee SC 4, *Products (other than hoses)*.

This second edition cancels and replaces the first edition (ISO 3302-2:1998), of which it constitutes a minor revision, the main purpose of which was to correct Figure 5, revise Subclause 4.2.1 and update the normative references.

ISO 3302 consists of the following parts, under the general title *Rubber — Tolerances for products*:

- *Part 1: Dimensional tolerances*
- *Part 2: Geometrical tolerances*

Rubber — Tolerances for products —

Part 2: Geometrical tolerances

1 Scope

This part of ISO 3302 specifies the following geometrical tolerances for moulded and extruded solid rubber products, including those with metal inserts:

- flatness tolerance;
- parallelism tolerance;
- perpendicularity tolerance;
- coaxiality tolerance;
- positional tolerance.

The tolerances are primarily intended for use with vulcanized rubber but may also be suitable for products made of thermoplastic rubbers.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1101:2004, *Geometrical Product Specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out*

ISO 2230, *Rubber products — Guidelines for storage*

ISO 23529, *Rubber — General procedures for preparing and conditioning test pieces for physical test methods*

3 Classes of tolerances

Three classes of tolerance are specified, as follows:

- P Precision
- M Medium
- N Non-critical

The necessary tolerance class depends on the requirements of the application. Tolerance classes M and P require more manufacturing effort and to some extent finishing, e.g. by grinding.

It is impossible to illustrate every design of moulded product and the cross-section of every extruded product. Therefore the tolerances shown in Figures 1 to 6 should be regarded simply as examples.

Details and descriptions of the so-called “tolerance frame” and “tolerance zone” are given in ISO 1101:2004, Clauses 6 and 8.

It shall be noted that the closest tolerances are not applicable to all rubber hardnesses. In general, products made from soft vulcanizates need greater tolerances than harder ones.

4 Measurement of dimensions

4.1 General

For solid products, measurements of dimensions shall not be made until 16 h have elapsed after vulcanization, this minimum time being extended to 72 h in cases of dispute. Measurements shall be completed within 3 months after the date of despatch to the purchaser or before the product is put into use, whichever is the shorter time.

Measurements shall be made at standard temperature, after conditioning (see ISO 23529). Care shall be taken to ensure that the products are not subjected to adverse storage conditions (see ISO 2230) and that they are not distorted during measurement.

4.2 Test instruments

4.2.1 Measurements shall be made in accordance with ISO 23529.

4.2.2 All instruments shall be capable of measuring the dimension with an error within the tolerances specified.

4.2.3 In all measurements intended to be comparative, the same measuring device shall be used.

5 Flatness tolerance

The toleranced surface is contained between two parallel planes a distance t apart (see Figure 1 and also ISO 1101:2004, Subclause 18.2).

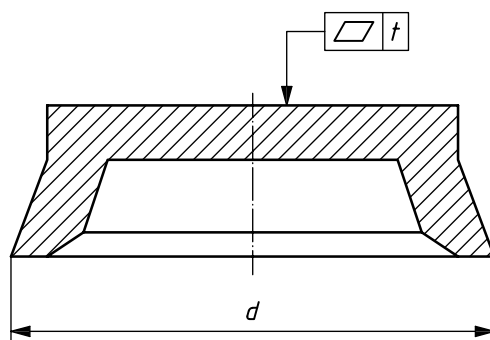


Figure 1 — Example of a flatness tolerance

The required flatness tolerances are given in Table 1.

Table 1 — Required flatness tolerances

Values in millimetres (unless indicated otherwise)

Nominal dimension d		Class P	Class M	Class N
Above	Up to and including	Flatness tolerance, t		
0	16	0,1	0,15	0,25
16	25	0,15	0,20	0,35
25	40	0,15	0,25	0,4
40	63	0,2	0,35	0,5
63	100	0,25	0,4	0,7
100	—	0,3 %	0,5 %	0,8 %

6 Parallelism tolerance

6.1 Sandwich structure (rubber between two metal plates)

The tolerated surface is contained between two parallel planes a distance t apart and parallel to the datum surface D (see Figure 2 and also ISO 1101:2004, Subclause 18.9.3).

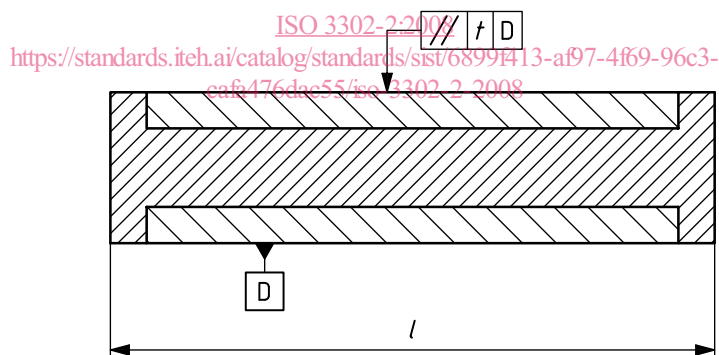


Figure 2 — Example of a parallelism tolerance: sandwich structure

The required parallelism tolerances for a sandwich structure are given in Table 2.

Table 2 — Required parallelism tolerances: sandwich structure

Values in millimetres (unless indicated otherwise)

Nominal dimension l		Class P	Class M	Class N
Above	Up to and including	Parallelism tolerance, t		
0	40	0,15	0,2	0,35
40	100	0,2	0,35	0,5
100	250	0,35	0,5	0,8
250	—	0,15 %	0,25 %	0,4 %

6.2 Extruded-product cut section (e.g. lathe-cut rings)

The tolerated surface is contained between two parallel planes a distance t apart and parallel to the datum surface E (see Figure 3 and also ISO 1101:2004, Subclause 18.9.3).

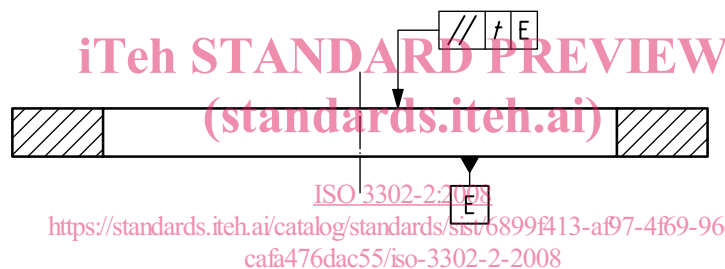


Figure 3 — Example of a parallelism tolerance: extruded-product cut section

The required parallelism tolerances for an extruded-product cut section are given in Table 3.

Table 3 — Required parallelism tolerances: extruded-product cut section

Values in millimetres

Class P	Class M	Class N
Parallelism tolerance, t		
0,1	0,2	0,3

7 Perpendicularity tolerance

The tolerated face of the product is contained between two parallel planes a distance t apart and perpendicular to the axis A (datum line) (see Figure 4 and also ISO 1101:2004, Subclause 18.10.4).

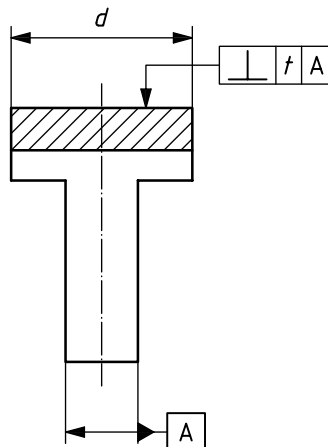


Figure 4 — Example of a perpendicularity tolerance

The required perpendicularity tolerances are given in Table 4.

Table 4 — Required perpendicularity tolerances

Values in millimetres (unless indicated otherwise)

Nominal dimension d		Class P	Class M	Class N
Above	Up to and including	Perpendicularity tolerance, t		
0	16	0,1	0,15	0,25
16	25	0,15	0,25	0,4
25	40	0,25	0,4	0,7
40	63	0,4	0,6	1,0
63	100	0,7	1,0	1,6
100	—	0,7 %	1,0 %	1,6 %

8 Coaxiality tolerance

8.1 Moulded products

The axis of each cylinder to which a tolerance frame is linked is contained in a cylindrical zone of diameter t_C or t_F , respectively, coaxial with the datum axis D (see Figure 5 and also ISO 1101:2004, Subclause 18.13.2), a distinction being made between

- tolerances on fixed dimensions (subscript F), which are the dimensions defining a part of the moulded product that are not affected by deforming influences like flash thickness or the lateral displacement of mould parts (upper and lower parts or cores) (see Figure 5, diameters a and b);