



**Digital cellular telecommunications system (Phase 2+);
Universal Mobile Telecommunications System (UMTS);**

LTE;

**AT command set for User Equipment (UE)
(3GPP TS 27.007 version 12.7.0 Release 12)**



ReferenceRTS/TSGC-0127007vc70

Keywords

GSM,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2015.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**may not**", "**need**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	9
1 Scope	10
2 References	11
3 Definitions and abbreviations.....	17
3.1 Definitions	17
3.2 Abbreviations	17
4 AT command syntax	18
4.0 General	18
4.1 Command line	18
4.2 Information responses and result codes.....	19
4.3 ITU-T Recommendation V.250 [14] TE-TA interface commands	19
5 General commands.....	20
5.0 General	20
5.1 Request manufacturer identification +CGMI.....	20
5.2 Request model identification +CGMM.....	21
5.3 Request revision identification +CGMR.....	21
5.4 Request product serial number identification +CGSN.....	22
5.5 Select TE character set +CSCS.....	23
5.6 Request international mobile subscriber identity +CIMI	24
5.7 Multiplexing mode +CMUX	25
5.8 ITU-T Recommendation V.250 [14] generic TA control commands.....	27
5.9 PCCA STD-101 [17] select wireless network +WS46.....	27
5.10 Informative examples.....	28
6 Call control commands and methods	29
6.0 General	29
6.1 Select type of address +CSTA.....	29
6.2 ITU-T Recommendation V.250 [14] dial command D.....	30
6.3 Direct dialling from phonebooks.....	30
6.4 Call mode +CMOD	32
6.4A Voice call mode +CVMOD.....	32
6.5 Hangup call +CHUP.....	33
6.6 Alternating mode call control method.....	34
6.7 Select bearer service type +CBST.....	35
6.8 Radio link protocol +CRLP.....	38
6.9 Service reporting control +CR.....	39
6.10 Extended error report +CEER	39
6.11 Cellular result codes +CRC	40
6.12 HSCSD device parameters +CHSD	42
6.13 HSCSD transparent call configuration +CHST.....	43
6.14 HSCSD non-transparent call configuration +CHSN	43
6.15 HSCSD current call parameters +CHSC.....	44
6.16 HSCSD parameters report +CHSR	45
6.17 HSCSD automatic user initiated upgrading +CHSU.....	45
6.18 HSCSD non-transparent asymmetry configuration +CHSA	46
6.19 Single numbering scheme +CSNS	47
6.20 Voice hangup control +CVHU.....	47
6.21 CCITT V.120 [36] rate adaption protocol +CV120	48
6.22 Settings date format +CSDF.....	49

6.23	Silence command +CSIL.....	50
6.24	Settings time format +CSTF.....	51
6.25	ITU-T Recommendation V.250 [14] call control commands.....	52
6.26	ITU-T Recommendation V.250 [14] data compression commands.....	52
6.27	Initiate eCall +CECALL.....	52
6.28	Informative examples.....	53
7	Network service related commands.....	54
7.0	General.....	54
7.1	Subscriber number +CNUM.....	54
7.2	Network registration +CREG.....	55
7.3	PLMN selection +COPS.....	57
7.4	Facility lock +CLCK.....	59
7.5	Change password +CPWD.....	61
7.6	Calling line identification presentation +CLIP.....	61
7.7	Calling line identification restriction +CLIR.....	63
7.8	Connected line identification presentation +COLP.....	64
7.9	Called line identification presentation +CDIP.....	65
7.10	Closed user group +CCUG.....	66
7.11	Call forwarding number and conditions +CCFC.....	67
7.12	Call waiting +CCWA.....	68
7.13	Call related supplementary services +CHLD.....	70
7.14	Call deflection +CTFR.....	71
7.15	Unstructured supplementary service data +CUSD.....	72
7.16	Advice of charge +CAOC.....	73
7.17	Supplementary service notifications +CSSN.....	74
7.18	List current calls +CLCC.....	76
7.19	Preferred PLMN list +CPOL.....	77
7.20	Selection of preferred PLMN list +CPLS.....	79
7.21	Read operator names +COPN.....	80
7.22	eMLPP priority registration and interrogation +CAEMLPP.....	80
7.23	eMLPP subscriptions +CPPS.....	81
7.24	Fast call setup conditions +CFCS.....	81
7.25	Automatic answer for eMLPP service +CAAP.....	82
7.26	User to user signalling service 1 +CUUS1.....	82
7.27	Preferred network indication +CPNET.....	84
7.28	Preferred network status +CPNSTAT.....	85
7.29	Current packet switched bearer +CPSB.....	85
7.30	Calling name identification presentation +CNAP.....	87
7.31	Connected line identification restriction status +COLR.....	88
7.32	Service specific access control restriction status +CSSAC.....	88
7.33	Network emergency bearer services support +CNEM.....	90
7.34	Enhanced closed user group +CECUG.....	91
7.35	Communication forwarding number and conditions with URI support +CCFCU.....	93
7.36	Message waiting indication control +CMWI.....	94
7.37	Session start and stop for smart congestion mitigation +CSCM.....	95
7.38	Power Saving Mode Setting +CPSMS.....	96
7.39	Informative examples.....	97
8	Mobile termination control and status commands.....	99
8.0	General.....	99
8.1	Phone activity status +CPAS.....	100
8.2	Set phone functionality +CFUN.....	101
8.3	Enter PIN +CPIN.....	102
8.4	Battery charge +CBC.....	104
8.5	Signal quality +CSQ.....	104
8.6	Mobile termination control mode +CMEC.....	105
8.7	Keypad control +CKPD.....	106
8.8	Display control +CDIS.....	107
8.9	Indicator control +CIND.....	108
8.10	Mobile termination event reporting +CMER.....	109
8.11	Select phonebook memory storage +CPBS.....	112

8.12	Read phonebook entries +CPBR	113
8.13	Find phonebook entries +CPBF	114
8.14	Write phonebook entry +CPBW	117
8.15	Clock +CCLK	118
8.16	Alarm +CALA	119
8.17	Generic SIM access +CSIM	120
8.18	Restricted SIM access +CRSM	121
8.19	Secure control command +CSCC	122
8.20	Alert sound mode +CALM	123
8.21	Ringer sound level +CRSL	123
8.22	Vibrator mode +CVIB	124
8.23	Loudspeaker volume level +CLVL	125
8.24	Mute control +CMUT	125
8.25	Accumulated call meter +CACM	126
8.26	Accumulated call meter maximum +CAMM	126
8.27	Price per unit and currency table +CPUC	127
8.28	Call meter maximum event +CCWE	127
8.29	Power class +CPWC	128
8.30	Set language +CLAN	129
8.31	Language event +CLAE	130
8.32	Set greeting text +CSGT	130
8.33	Set voice mail number +CSVM	131
8.34	Ring melody control +CRMC	132
8.35	Ring melody playback +CRMP	133
8.36	Master reset +CMAR	133
8.37	List all available AT commands +CLAC	134
8.38	Delete alarm +CALD	134
8.39	Postpone or dismiss an alarm +CAPD	135
8.40	Automatic time zone update +CTZU	135
8.41	Time zone reporting +CTZR	136
8.42	Enter protocol mode +CPROT	137
8.43	Generic UICC logical channel access +CGLA	138
8.44	Restricted UICC logical channel access +CRLA	139
8.45	Open logical channel +CCHO	140
8.46	Close logical channel +CCHC	141
8.47	EAP authentication +CEAP	141
8.48	EAP retrieve parameters +CERP	143
8.49	UICC application discovery +CUAD	143
8.50	Mobile originated location request +CMOLR	144
8.51	Backlight +CBKLT	148
8.52	Command touch screen action +CTSA	149
8.53	Command screen orientation +CSO	151
8.54	Command screen size +CSS	153
8.54A	Command display screen boundary +CDSB	154
8.55	Positioning control +CPOS	154
8.56	Positioning reporting +CPOSR	172
8.57	Mobile terminated location request notification +CMTLR	173
8.58	Mobile terminated location request disclosure allowance +CMTLRA	174
8.59	Battery capacity +CBCAP	174
8.60	Battery connection status +CBCON	175
8.61	Battery charger status +CBCHG	176
8.62	Printing IP address format +CGPIAF	177
8.63	IMS single radio voice call continuity +CISRVCC	178
8.64	IMS network reporting +CIREP	179
8.65	Remaining PIN retries +CPINR	180
8.66	Set card slot +CSUS	181
8.67	Emergency numbers +CEN	181
8.68	Availability for voice calls with IMS +CAVIMS	182
8.69	Extended signal quality +CESQ	183
8.70	Primary notification event reporting +CPNER	185
8.71	IMS registration information +CIREG	186
8.72	Availability for SMS using IMS +CASIMS	187

8.73	Monitor of current calls +CMCCS	187
8.74	List of current calls +CLCCS	193
8.75	Supported radio accesses +CSRA	196
8.76	Circuit switched fallback +CCSFB	198
8.77	Informative examples	199
9	Mobile termination errors.....	204
9.1	Report mobile termination error +CMEE.....	204
9.1A	Report mobile originated location request error +CMOLRE	204
9.1B	Report network error codes +CNEC	205
9.2	Mobile termination error result code +CME ERROR	206
9.2.0	General.....	206
9.2.1	General errors	207
9.2.2	GPRS and EPS-related errors	208
9.2.2.1	Errors related to a failure to perform an attach.....	208
9.2.2.2	Errors related to a failure to activate a context.....	208
9.2.2.3	Errors related to a failure to disconnect a PDN.....	209
9.2.2.4	Other GPRS errors	209
9.2.3	VBS, VGCS and eMLPP-related errors.....	209
9.3	Mobile termination error result code +CMOLRE	209
9.3.1	General.....	209
9.3.2	Errors	209
9.4	Informative examples	210
10	Commands for packet domain.....	210
10.0	General	210
10.1	Commands specific to MTs supporting the packet domain.....	211
10.1.0	General remark about EPS bearer contexts and PDP contexts	211
10.1.1	Define PDP context +CGDCONT.....	212
10.1.2	Define secondary PDP context +CGDSCONT.....	215
10.1.3	Traffic flow template +CGTFT	217
10.1.4	Quality of service profile (requested) +CGQREQ.....	220
10.1.5	Quality of service profile (minimum acceptable) +CGQMIN	222
10.1.6	3G quality of service profile (requested) +CGEQREQ	223
10.1.7	3G quality of service profile (minimum acceptable) +CGEQMIN.....	226
10.1.8	3G quality of service profile (negotiated) +CGEQNEG	230
10.1.9	PS attach or detach +CGATT	232
10.1.10	PDP context activate or deactivate +CGACT	232
10.1.11	PDP context modify +CGCMOD.....	233
10.1.12	Enter data state +CGDATA	234
10.1.13	Configure local octet stream PAD parameters +CGCLOSP (Obsolete).....	236
10.1.14	Show PDP address(es) +CGPADDR.....	236
10.1.15	Automatic response to a network request for PDP context activation +CGAUTO	237
10.1.16	Manual response to a network request for PDP context activation +CGANS	238
10.1.17	GPRS mobile station class +CGCLASS.....	239
10.1.18	Configure local triple-X PAD parameters +CGCLPAD (GPRS only) (Obsolete)	240
10.1.19	Packet domain event reporting +CGEREP	240
10.1.20	GPRS network registration status +CGREG	244
10.1.21	Select service for MO SMS messages +CGSMS.....	246
10.1.22	EPS network registration status +CEREG	247
10.1.23	PDP context read dynamic parameters +CGCONTRDP	249
10.1.24	Secondary PDP context read dynamic parameters +CGSCONTRDP	251
10.1.25	Traffic flow template read dynamic parameters +CGTFTTRDP	252
10.1.26	Define EPS quality of service +CGEQOS	254
10.1.27	EPS quality of service read dynamic parameters +CGEQOSRDP	255
10.1.28	UE modes of operation for EPS +CEMODE	256
10.1.29	Delete non-active PDP contexts +CGDEL	257
10.1.30	Signalling connection status +CSCON	257
10.1.31	Define PDP context authentication parameters +CGAUTH.....	258
10.1.32	Initial PDP context activation +CIPCA	259
10.1.33	No more PS data +CNMPSD.....	260
10.1.34	UE's usage setting for EPS +CEUS	260

10.1.35	UE's Voice Domain Preference E-UTRAN +CEVDP	261
10.1.36	UE's Voice Domain Preference UTRAN +CVDV	262
10.1.37	UE's Mobility Management IMS Voice Termination +CMMIVT	262
10.1.38	Power Preference Indication for EPS +CEPPI	263
10.2	Modem compatibility commands	263
10.2.0	General	263
10.2.1	MT originated PDP context activation	263
10.2.1.0	General	263
10.2.1.1	Request packet domain service 'D'	264
10.2.1.2	Request packet domain IP service 'D'	265
10.2.2	Network requested PDP context activation	266
10.2.2.0	General	266
10.2.2.1	Automatic response to a network request for PDP context activation 'S0'	266
10.2.2.2	Manual acceptance of a network request for PDP context activation 'A'	266
10.2.2.3	Manual rejection of a network request for PDP context activation 'H'	266
11	Commands for VGCS and VBS	267
11.0	General	267
11.1	Commands specific to MTs supporting the VGCS and VBS	267
11.1.1	Accept an incoming voice group or voice broadcast call +CAJOIN	267
11.1.2	Reject an incoming voice group or voice broadcast call +CAREJ	268
11.1.3	Leave an ongoing voice group or voice broadcast call +CAHLD	268
11.1.4	Talker access for voice group call +CAPTT	269
11.1.5	Voice group call uplink status presentation +CAULEV	269
11.1.6	List current voice group and voice broadcast calls +CALCC	270
11.1.7	Voice group or voice broadcast call state attribute presentation +CACSP	271
11.1.8	NCH support indication +CANCHEV	272
11.1.9	Originator to dispatcher information +COTDI	273
11.1.10	Short data transmission during ongoing VGCS +GEPTT	274
11.1.11	Group Id prefixes capability +CGIPC	275
11.2	Modem compatibility commands	275
11.2.0	General	275
11.2.1	Request VGCS or VBS service 'D'	275
11.2.2	Termination of an voice group or voice broadcast call 'H'	276
11.3.1	VGCS subscriptions and GId status +CGCS	276
11.3.2	VBS subscriptions and GId status +CBCS	277
11.4	Informative examples	278
12	Commands for USIM application toolkit	278
12.1	General	278
12.2	Commands specific to MTs supporting USAT	279
12.2.1	Read USAT profile +CUSATR	279
12.2.2	Write USAT profile +CUSATW	279
12.2.3	Profile download upon start-up +CUSATD	280
12.2.4	Activate USAT profile +CUSATA	282
12.2.5	Send USAT terminal response +CUSATT	283
12.2.6	Send USAT envelope command +CUSATE	284
12.3	Informative examples	284
13	Commands for enhanced support of dialling	286
13.1	General	286
13.2	Commands for dialling	287
13.2.1	Dial URI +CDU	287
13.2.2	Dial URI from phonebook +CDUP	289
13.2.3	Hangup of current calls +CHCCS	290
13.2.4	Define media profile +CDEFMP	291
13.2.5	Control and modify media description +CCMMD	293
13.3	Informative examples	294
Annex A (normative):	Summary of commands from other standards	298
Annex B (normative):	Summary of result codes	300

Annex C (informative):	Commands from TIA IS-101	302
C.1	Introduction	302
C.2	Commands.....	303
C.2.1	Select mode +FCLASS	303
C.2.2	Buffer threshold setting +VBT	303
C.2.3	Calling number ID presentation +VCID	304
C.2.4	Receive gain selection +VGR	304
C.2.5	Transmit gain selection +VGT	304
C.2.6	Initialise voice parameters +VIP	305
C.2.7	Inactivity timer +VIT	305
C.2.8	Line selection +VLS.....	305
C.2.9	Receive data state +VRX	307
C.2.10	Select compression method +VSM	307
C.2.11	DTMF and tone generation +VTS.....	308
C.2.12	Tone duration +VTD	308
C.2.13	Transmit data state +VTX	309
Annex D (informative):	Bibliography.....	310
Annex E (informative):	Mobile originated alternating voice/data call example.....	311
Annex F (informative):	Mobile terminated voice followed by data call example.....	312
Annex G (informative):	Voice call example.....	313
Annex H (informative):	Change history	314
History		320

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/922da3cd-76af-4aa1-bb37-20afce86ffb/etsi-ts-127-007-v12.7.0-2015-01>

1 Scope

The present document specifies a profile of AT commands and recommends that this profile be used for controlling Mobile Termination (MT) functions and GSM/UMTS network services from a Terminal Equipment (TE) through Terminal Adaptor (TA). The command prefix +C is reserved for Digital Cellular in ITU-T Recommendation V.250 [14]. The present document has also the syntax details used to construct these extended GSM/UMTS commands. Commands from ITU-T Recommendation V.250 [14] and existing digital cellular standards (TIA IS-99 [15] and TIA IS-135 [16]) are used whenever applicable. Some of the new commands are defined such way that they can be easily applied to MT of networks other than GSM/UMTS. ITU-T Recommendation T.31 [11] and ITU-T Recommendation T.32 [12] fax AT commands may be used for GSM/UMTS fax transmission from TE. GSM/UMTS Short Message Service AT commands are defined in 3GPP TS 27.005 [24]. AT commands for GPRS and EPC are defined in clause 10 of this specification. The present document assumes an abstract architecture comprising a TE (e.g. a computer) and a MT interfaced by a TA (see figure 1). The span of control of the defined commands should allow handling of any physical implementation that this abstract architecture may lead to:

- TA, MT and TE as three separate entities;
- TA integrated under the MT cover, and the TE implemented as a separate entity;
- TA integrated under the TE cover, and the MT implemented as a separate entity; and
- TA and MT integrated under the TE cover as a single entity.

The commands described in the present document may be observed on the link between the TE and the TA. However, most of the commands retrieve information about the MT, not about the TA.

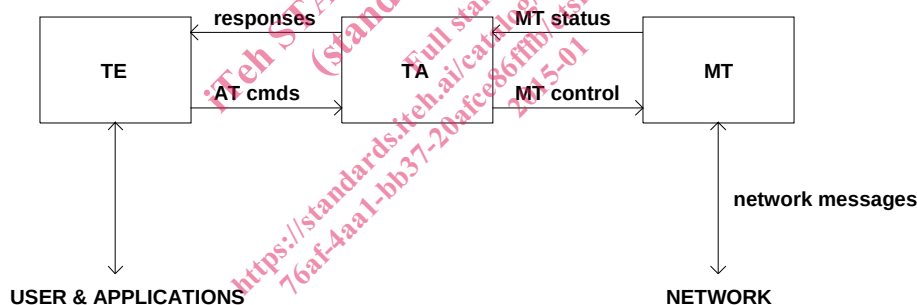


Figure 1: Setup

Interface between TE and TA is intended to operate over existing serial (ITU-T Recommendation V.24) cables, infrared link, and all link types with similar behaviour. For correct operation many of the defined commands require eight bit data and therefore it is recommended that TE-TA link is set to eight bits/ byte mode. (For infrared operation implementation, refer informative references IrDA. For embedding AT commands and data during on-line data state, refer TIA-617/ITU-T V.80.) Interface between TA and MT is dependent on the interface in the MT.

The functional blocks shown in figure 1, using AT commands, shall follow the principles described in the interactions handling framework 3GPP TS 23.227 [63].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 22.002: "Bearer Services (BS) supported by a GSM Public Land Mobile Network (PLMN)".
- [2] 3GPP TS 22.003: "Teleservices supported by a GSM Public Land Mobile Network (PLMN)".
- [3] 3GPP TS 22.081: "Line identification supplementary services - Stage 1".
- [4] 3GPP TS 22.082: "Call Forwarding (CF) supplementary services - Stage 1".
- [5] 3GPP TS 22.083: "Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 1".
- [6] 3GPP TS 22.088: "Call Barring (CB) supplementary services - Stage 1".
- [7] 3GPP TS 23.003: "Numbering, addressing and identification".
- [8] 3GPP TS 24.008: "Mobile Radio Interface Layer 3 specification; Core Network Protocols- Stage 3".
- [9] GSM MoU SE.13; GSM MoU Permanent Reference Document SE.13: "GSM Mobile Network Codes and Names".
- [10] ITU-T Recommendation E.212: "Identification plan for land mobile stations".
- [11] ITU-T Recommendation T.31: "Asynchronous facsimile DCE control, service class 1".
- [12] ITU-T Recommendation T.32: "Asynchronous facsimile DCE control, service class 2".
- [13] ITU-T Recommendation T.50: "International Reference Alphabet (IRA) (Formerly International Alphabet No. 5 or IA5) - Information technology - 7-bit coded character set for information exchange".
- [14] ITU-T Recommendation V.250: "Serial asynchronous automatic dialling and control".
- [15] TIA IS-99: "Data Services Option Standard for Wideband Spread Spectrum Digital Cellular System".
- [16] TIA IS-135: "800 MHz Cellular Systems, TDMA Services, Async Data and Fax".
- [17] PCCA STD-101 Data Transmission Systems and Equipment: "Serial Asynchronous Automatic Dialling and Control for Character Mode DCE on Wireless Data Services".
- [18] 3GPP TS 24.022: "Radio Link Protocol (RLP) for data and telematic services on the Mobile Station - Base Station System (MS - BSS) interface and the Base Station System - Mobile-services Switching Centre (BSS - MSC) interface".
- [19] 3GPP TS 22.030: "Man Machine Interface (MMI) of the Mobile Station (MS)".
- [20] 3GPP TS 45.008: "Radio subsystem link control".
- [21] 3GPP TS 22.085: "Closed User Group (CUG) supplementary services - Stage 1".
- [22] 3GPP TS 22.084: "MultiParty (MPTY) supplementary services - Stage 1".

- [23] 3GPP TS 22.090: "Unstructured Supplementary Service Data (USSD) - Stage 1".
- [24] 3GPP TS 27.005: "Use of Data Terminal Equipment - Data Circuit terminating Equipment (DTE - DCE) interface for Short Message Service (SMS) and Cell Broadcast Service (CBS)".
- [25] 3GPP TS 23.038: "Alphabet and language specific information".
- [26] 3GPP TS 22.024: "Description of Charge Advice Information (CAI)".
- [27] 3GPP TS 22.086: "Advice of Charge (AoC) supplementary services - Stage 1".
- [28] 3GPP TS 51.011: "Specification of the Subscriber Identity Module - Mobile Equipment (SIM-ME) interface".
- [29] 3GPP TS 22.034: "High Speed Circuit Switched Data (HSCSD) - Stage 1".
- [30] 3GPP TS 22.091: "Explicit Call Transfer (ECT) supplementary service - Stage 1".
- [31] 3GPP TS 22.072: "Call Deflection (CD) supplementary service - Stage 1".
- [32] ISO/IEC 10646: "Universal Multiple-Octet Coded Character Set (UCS)"; UCS2, 16 bit coding.
- [33] 3GPP TS 22.022: "Personalization of GSM Mobile Equipment (ME) Mobile functionality specification".
- [34] 3GPP TS 27.060: "General requirements on Mobile Stations (MS) supporting General Packet Radio Bearer Service (GPRS)".
- [35] Void.
- [36] CCITT Recommendation V.120: "Support by an ISDN of data terminal equipment with V-Series type interfaces with provision for statistical multiplexing".
- [37] Void.
- [38] 3GPP TS 45.005: "Radio transmission and reception".
- [39] 3GPP TS 29.061: "Interworking between the Public Land Mobile Network (PLMN) supporting GPRS and Packet Data Networks (PDN)".
- [40] 3GPP TS 23.081: "Line identification supplementary services - Stage 2".
- [41] 3GPP TS 27.001: "General on Terminal Adaptation Functions (TAF) for Mobile Stations (MS)".
- [42] 3GPP TS 29.007: "General requirements on interworking between the Public Land Mobile Network (PLMN) and the Integrated Services Digital Network (ISDN) or Public Switched Telephone Network (PSTN)".
- [43] Infrared Data Association; Specification of Ir Mobile Communications (IrMC).
- [44] IrDA Object Exchange Protocol.
- [45] 3GPP TS 27.010: "Terminal Equipment to User Equipment (TE-UE) multiplexer protocol User Equipment (UE)".
- [46] 3GPP TS 23.107: "Quality of Service, Concept and Architecture".
- [47] 3GPP TS 23.060: "General Packet Radio Service (GPRS) Service description; Stage 2".
- [48] Void.
- [49] 3GPP TS 43.068: "Voice Group Call service (VGCS) - Stage 2".
- [50] 3GPP TS 43.069: "Voice Broadcast Service (VBS) - Stage 2".
- [51] Void.
- [52] 3GPP TS 44.068: "Voice Group Call service (VGCS) - Stage 3".