
Prizemni snopovni radio (TETRA) - Specifikacija za preskušanje skladnosti - 4. del: Specifikacija za preskušanje protokola za neposredno obratovanje (DMO) -- 1. poddel: Zgradba preskušalnega niza in nameni preskušanja (TSS&TP) za radijski vmesnik (AI) med mobilnima postajama (MS-MS)

Terrestrial Trunked Radio (TETRA); Conformance testing specification; Part 4: Protocol testing specification for Direct Mode Operation (DMO); Sub-part 1: Test Suite Structure and Test Purposes (TSS&TP) for Mobile Station to Mobile Station (MS-MS) Air Interface (AI)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 394-4-1 E1:2003](https://standards.iteh.ai/catalog/standards/sist/cb2c129c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb2c129c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003>

Ta slovenski standard je istoveten z: ETS 300 394-4-1 Edition 1

ICS:

33.070.10	Prizemni snopovni radio (TETRA)	Terrestrial Trunked Radio (TETRA)
-----------	---------------------------------	-----------------------------------

SIST ETS 300 394-4-1 E1:2003	en
-------------------------------------	-----------

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 394-4-1 E1:2003](https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003>



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 394-4-1

June 1999

Source: TETRA

Reference: DE/TETRA-02009-4-1

ICS: 33.020

Key words: TETRA, protocol, testing, radio

**Terrestrial Trunked Radio (TETRA);
Conformance testing specification;
Part 4: Protocol testing specification for
Direct Mode Operation (DMO);
Sub-part 1: Test Suite Structure and Test Purposes (TSS&TP)
for Mobile Station to Mobile Station (MS-MS)
Air Interface (AI)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

Internet: secretariat@etsi.fr - <http://www.etsi.org>

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1999. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 394-4-1 E1:2003](https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003>

Contents

Foreword	5
1 Scope	7
2 References	7
3 Definitions and abbreviations	8
3.1 TETRA definitions	8
3.2 TETRA abbreviations	8
3.3 ISO 9646 definitions	8
3.4 ISO 9646 abbreviations	8
4 Test Suite Structure (TSS)	9
4.1 NWK layer test groups	9
4.2 MAC layer test groups	9
4.3 Test group description	9
5 Introduction to Test Purposes (TPs)	10
5.1 Test purpose definition conventions	10
5.1.1 TPs descriptions	10
5.1.2 Preamble descriptions	10
5.1.2.1 Preamble idle_to_TX_occupation: From Idle state to Call Active TX Occupation	11
5.1.2.2 Preamble idle_to_TX_reservation: From Idle state to Call Active TX Reservation	12
5.1.2.3 Preamble idle_to_RX_occupation: From Idle state to Call Active RX Occupation	14
5.1.2.4 Preamble idle_to_RX_reservation	15
5.1.2.5 Preamble idle_channel_occupation	16
5.1.3 Postamble descriptions	17
5.1.3.1 Postamble TX_occupation_to_idle: From Call Active TX Occupation state to Idle	17
5.1.3.2 Postamble TX_reservation_to_idle: From Call Active TX Reserved state to Idle	17
5.1.3.3 Postamble RX_occupation_to_idle: From Call Active RX Occupation state to Idle	18
5.1.3.4 Postamble RX_reservation_to_idle: From Call Active RX Reserved state to Idle	18
5.2 Test purpose naming conventions	19
5.3 Selection expressions	20
6 DMO MS-MS test purposes	21
6.1 DMCC Circuit Mode (CM) tests	21
6.1.1 MS-MS CM capability tests	21
6.1.2 MS-MS CM valid behaviour tests	22
6.1.2.1 The IUT is in idle state, DMO channel is free	22
6.1.2.2 IUT is in idle state, DMO channel is busy	23
6.1.2.3 IUT is in TX occupation state	24
6.1.2.4 IUT is in RX occupation state	25
6.1.2.5 IUT is in TX reservation state	26
6.1.2.6 IUT is in RX reservation state	28
6.1.3 MS-MS CM timer tests	29
6.1.3.1 DT303 Response to DM-SETUP PRES timer	29
6.1.3.2 DT311 Call transaction timer	29
6.2 DMCC Short data service (SDS)	29
6.2.1 MS-MS SDS Capability tests	29
6.2.2 MS-MS SDS Valid behaviour tests	30

	6.2.2.1	IUT is in idle state, channel is free.....	30
	6.2.2.2	IUT is in idle state, channel is busy	31
	6.2.2.3	IUT is in state TX occupation.....	32
	6.2.2.4	IUT is in RX occupation state	32
	6.2.2.5	IUT is in TX reservation state	34
	6.2.2.6	IUT is in RX reservation state.....	35
	6.2.3	MS-MS SDS Timer tests	36
	6.2.3.1	DT316 Response to DM-SDS DATA timer.....	36
6.3		DMO MS-MS MAC layer	36
	6.3.1	MS-MS MAC capability tests	36
	6.3.2	MS-MS MAC valid behaviour tests.....	37
	6.3.2.1	DM channel usage procedures.....	37
	6.3.2.2	Signalling messages procedures.....	39
	6.3.4	MS-MS MAC timer tests.....	42
Annex A (informative):		Bibliography	43
History.....			44

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 394-4-1 E1:2003](https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Terrestrial Trunked Radio (TETRA) Project of the European Telecommunications Standards Institute (ETSI).

This ETS consists of 4 parts as follows:

- Part 1: "Radio";
- Part 2: "Protocol testing specification for Voice plus Data (V+D);
- Part 4: "Protocol testing specification for Direct Mode Operation (DMO);**
- Part 5: "Security".

Transposition dates	
Date of adoption of this ETS:	4 June 1999
Date of latest announcement of this ETS (doa):	30 September 1999
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 March 2000
Date of withdrawal of any conflicting National Standard (dow):	31 March 2000

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 394-4-1 E1:2003](https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003>

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 394-4-1 E1:2003](https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003>

1 Scope

This ETS contains the Test Specifications (i.e. Test Suite Structure and Test Purposes (TSS&TP) and the Abstract Test Suites (ATS)) to test conformity of products to the TETRA Direct Mode Operation (DMO) protocols. This ETS is divided into several parts, each one dealing with one TSS&TP or one ATS for the test of a layer 2 or layer 3 protocol for DMO. This present part 4-1 deals with TSS&TP for Mobile Station to Mobile Station (MS-MS) Air Interface (AI) protocol.

Testing of security features is outside the scope of this ETS.

The objective of this test specification is to provide a basis for approval tests for TETRA equipment giving a high probability of air interface inter-operability between different manufacturer's TETRA equipment.

The ISO standard for the methodology of conformance testing, ISO/IEC 9646-1 [4] and ISO/IEC 9646-2 [5], as well as the ETSI methodology for conformance testing, ETS 300 406 [3], are used as the basis for the test methodology.

2 References

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 396-3 (1997): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 3: Mobile Station to Mobile Station (MS-MS) Air Interface (AI) protocol".
- [2] ETS 300 396-8-1 (1997): "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 8: Protocol Implementation Conformance Statements (PICS) proforma specification; Sub-part 1: Mobile Station to Mobile Station (MS-MS) Air Interface (AI)".
<https://standards.iteh.ai/catalog/standards/sist/cb2c129c-af41-4d12-af37-59d2398cef8/sist-ets-300-394-4-1-e1-2003>
- [3] ETS 300 406 (1995): "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".
- [4] ISO/IEC 9646-1 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 1: General concepts". (See also ITU-T Recommendation X.290).
- [5] ISO/IEC 9646-2 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 2: Abstract Test Suite specification". (See also ITU-T Recommendation X.291).

3 Definitions and abbreviations

3.1 TETRA definitions

For the purposes of this ETS, the definitions given in ETS 300 396-3 [1] apply.

3.2 TETRA abbreviations

For the purposes of this ETS the following TETRA abbreviations apply:

CM	Circuit Mode
DMCC	Direct Mode Call Control
DMO	Direct Mode of Operation
FCS	Frame Check Sequence
MAC	Medium Access Control
MNI	Mobile Network Identity
MS	Mobile Station
NWK	Network. Layer 3 of the TETRA protocol stack
SDS	Short Data Services
SDU	Service Data Unit
TX	Transmit
RX	Receive

3.3 ISO 9646 definitions

For the purposes of this ETS the following ISO 9646-1 [4] terms and definitions apply:

Implementation Conformance Statement (ICS)

Implementation Under Test (IUT)

Implementation eXtra Information for Testing (IXIT)

Protocol Implementation Conformance Statement (PICS)

Protocol Implementation eXtra Information for Testing (PIXIT)

3.4 ISO 9646 abbreviations

For the purposes of this ETS the following ISO 9646-1 [4] abbreviations apply:

IUT	Implementation Under Test
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
TP	Test Purpose
TSS	Test Suite Structure

4 Test Suite Structure (TSS)

4.1 NWK layer test groups

The first level separates the NWK layer (or layer 3) in different protocols (Circuit mode, Short Data Service). Next level splits protocol testing into functional test groups according to the type of testing: Capability test (CA), Valid Behaviour (BV) and Timer tests (TI). Further level classifies the possible operations in each protocol condition or state.

The following list defines the NWK layer test group names and identifiers used for those:

MS-MS Direct Mode Call Control (DMO_MSMS_DMCC)

Circuit mode (CM);
 Capability tests (CA);
 Valid Behaviour tests (BV);
 from Idle state(ID);
 from Idle state, channel busy (IB);
 from TX occupation State (TXO);
 from RX occupation State (RO);
 from TX Reservation (TR);
 from RX Reservation State (RR);
 Timer Tests (TI).

Short Data Service (SDS);
 Capability tests (CA);
 Valid Behaviour tests (BV);
 from Idle state(ID);
 from Idle state, channel busy (IB);
 from RX occupation State (RO);
 from TX Reservation (TR);
 from RX Reservation State (RR).
 Timer Tests (TI).

[SIST ETS 300 394-4-1 E1:2003](http://standards.iteh.ai/catalog/standards/sist/cb2cf29c-af4f-4d12-af37-59d239f8cef8/sist-ets-300-394-4-1-e1-2003)

4.2 MAC layer test groups

The first level of the MAC test groups separates the MAC test suite in functional test groups: CA, BV and TI. The second level of the test subgroups is used to form a division of protocol requirements.

The following list defines the MAC layer test group names and identifiers:

MS-MS MAC layer (DMO_DMO_MSMS_MACC)

Capability tests (CA);
 Valid behaviour tests (BV);
 Channel usage (CU);
 Signalling messages (SM);
 Traffic mode (TM).
 Timer tests (TI).

4.3 Test group description

Capability (CA) tests provide limited testing that the observable capabilities of the IUT are in accordance with the conformance requirements and the additional capabilities claimed in the PICS/PIXIT.

The Valid Behaviour (BV) group tests an IUT in response to valid behaviour of the test system. "Valid" means that a test event is syntactically and contextually correct. All test cases in the valid behaviour group are intended to verify as thoroughly as possible the various functions of the protocol.

Different timers are defined to supervise the various state transitions. The Timer (TI) test group is intended to verify that the IUT is reacting properly to an expiry of one of the timers or to a counter mismatch.

5 Introduction to Test Purposes (TPs)

The TPs for each test suite are defined in clause 6 of this ETS for NWK layer and MAC layer.

5.1 Test purpose definition conventions

5.1.1 TPs descriptions

Each TP is described using text presented in a table.

The table contains the following information:

Table 0

TP-Name The TP name is a unique identifier, specified according to the TP naming conventions defined in the subclause 5.1.2. (it is also the name of the corresponding test case)	Reference: reference to the paragraph number of specification ETS 300 396-3 [1] stating this conformance requirement. For example: ETS 300 396-3 [1], 6.2.5.1
Purpose	purpose of the test itself, indicating for example the test performed against a requirement of the protocol, described by this test purpose. Example: test of changeover initiated from RX reservation state
Test description	body of the test
Pass criteria	visible action to be observed at PCO to declare that the IUT passes the test and conforms to the specifications
Selection	expression based on ETS 300 396-8-1 [2] PICS statements, used to select or deselect the corresponding test case according to the options of the implementation.
Preamble	"None" or name of the preamble procedure bringing the IUT from idle state to the state required to run the test. For example: idle_to_RX_reservation E1:2003
Postamble	"None" or name of the postamble to bring the IUT back to idle state, for example: RX_occupation_to_idle E1:2003


The preambles and postambles are described using MSCs and are shown in the following subclauses.

5.1.2 Preamble descriptions

Preambles are used to bring the IUT from the idle state to the state where the test takes place. As the protocol has different options, as for instance the use of presence check or the absence of presence check, there are several ways to reach a given state. The preamble has to be chosen according to the IUT capabilities and the implemented options.

5.1.2.1 Preamble idle_to_TX_occupation: From Idle state to Call Active TX Occupation

With presence check

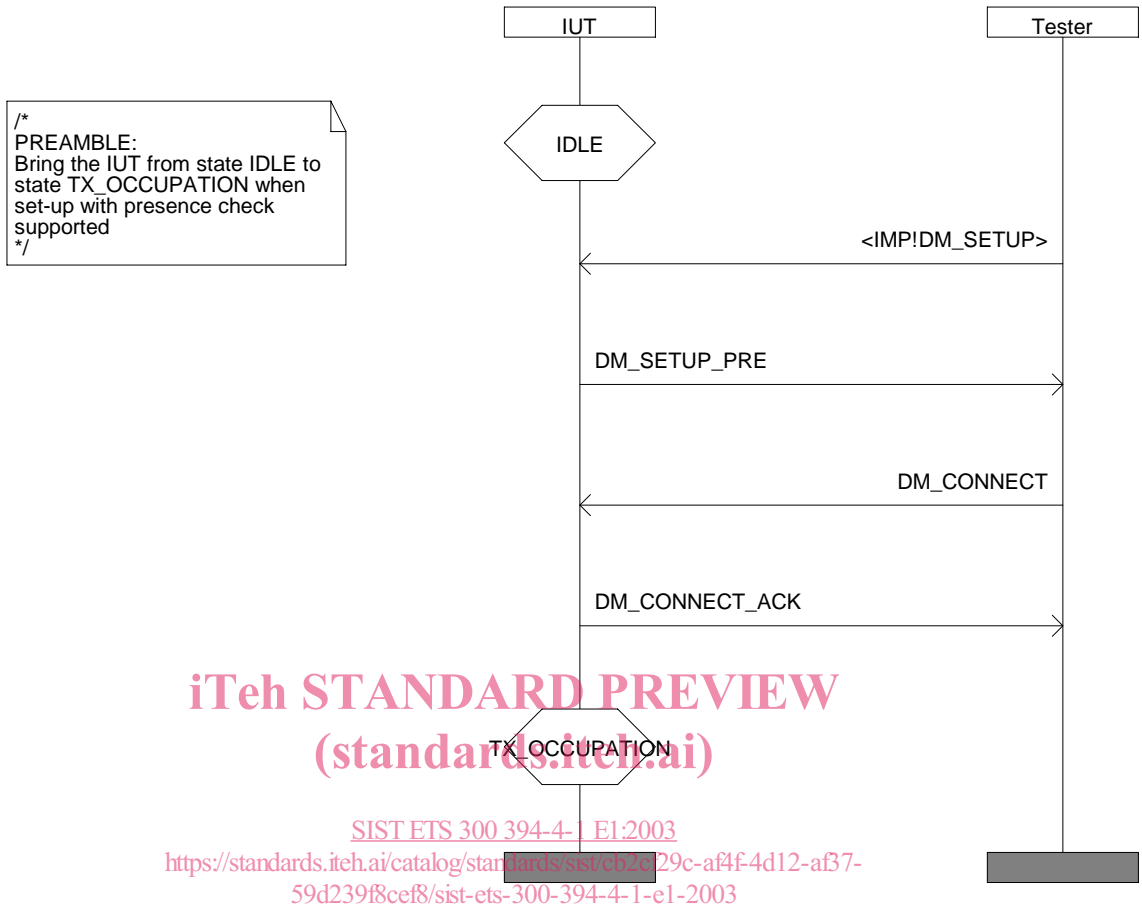

Without presence check

