



**SLOVENSKI STANDARD**  
**oSIST prEN 303 364-2 V1.0.1:2021**  
**01-januar-2021**

---

**Primarni nadzorni radar (PSR) - Harmonizirani standard za dostop do radijskega spektra - 2. del: Senzorji PSR za nadzor zračnega prometa (ATC), ki delujejo v frekvenčnem pasu od 2700 MHz do 3100 MHz (pas S)**

Primary Surveillance Radar (PSR) - Harmonised Standard for access to radio spectrum - Part 2: Air Traffic Control (ATC) PSR sensors operating in the frequency band 2 700 MHz to 3 100 MHz (S band)

(standards.iteh.ai)

[SIST EN 303 364-2 V1.1.1:2021](https://standards.iteh.ai/catalog/standards/sist/5464698f-5121-4b22-a542-28d4900f97ba/sist-en-303-364-2-v1-1-1-2021)  
<https://standards.iteh.ai/catalog/standards/sist/5464698f-5121-4b22-a542-28d4900f97ba/sist-en-303-364-2-v1-1-1-2021>

**Ta slovenski standard je istoveten z: ETSI EN 303 364-2 V1.0.1 (2020-11)**

---

**ICS:**

03.220.50	Zračni transport	Air transport
33.060.99	Druga oprema za radijske komunikacije	Other equipment for radiocommunications

**oSIST prEN 303 364-2 V1.0.1:2021**      **en**



Draft **ETSI EN 303 364-2** V1.0.1 (2020-11)



**Primary Surveillance Radar (PSR);  
Harmonised Standard for access to radio spectrum;  
Part 2: Air Traffic Control (ATC) PSR sensors operating in the  
frequency band 2 700 MHz to 3 100 MHz (S band)**

[SIST EN 303 364-2 V1.1.1:2021](https://standards.iteh.ai/catalog/standards/sist/5464698f-5121-4b22-a542-28d4900f97ba/sist-en-303-364-2-v1-1-1-2021)

<https://standards.iteh.ai/catalog/standards/sist/5464698f-5121-4b22-a542-28d4900f97ba/sist-en-303-364-2-v1-1-1-2021>

---

**Reference**

DEN/ERM-TGAERO-31-2

---

**Keywords**

aeronautical, harmonised standard, radar, radio

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARDS PREVIEW  
(standards.iteh.ai)

---

**Important notice**

---

The present document can be downloaded from:<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

**3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

**GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

# Contents

Intellectual Property Rights .....	5
Foreword.....	5
Modal verbs terminology.....	6
1 Scope .....	7
2 References .....	7
2.1 Normative references .....	7
2.2 Informative references.....	7
3 Definition of terms, symbols and abbreviations.....	8
3.1 Terms.....	8
3.2 Symbols.....	9
3.3 Abbreviations .....	9
4 Technical requirements specifications .....	10
4.1 Environmental profile.....	10
4.2 Conformance requirements .....	10
4.2.1 Transmitter requirements.....	10
4.2.1.1 Maximum frequency deviation .....	10
4.2.1.1.1 Definition.....	10
4.2.1.1.2 Limits .....	10
4.2.1.1.3 Conformance .....	10
4.2.1.2 Transmitter power.....	10
4.2.1.2.1 Definition.....	10
4.2.1.2.2 Limits .....	11
4.2.1.2.3 Conformance .....	11
4.2.1.3 Measured B <sub>40</sub> bandwidth.....	11
4.2.1.3.1 Definition.....	11
4.2.1.3.2 Limits .....	11
4.2.1.3.3 Conformance .....	11
4.2.1.4 Unwanted emissions.....	11
4.2.1.4.1 General requirements.....	11
4.2.1.4.2 Emissions in the Out-of-Band domain .....	12
4.2.1.4.2.1 Definition .....	12
4.2.1.4.2.2 Limits.....	12
4.2.1.4.2.3 Conformance.....	12
4.2.1.4.3 Emissions in the spurious domain .....	12
4.2.1.4.3.1 Definition .....	12
4.2.1.4.3.2 Limits.....	12
4.2.1.4.3.3 Conformance.....	13
4.2.1.4.4 Stand-by mode emissions .....	13
4.2.1.4.4.1 Definition .....	13
4.2.1.4.4.2 Limits.....	13
4.2.1.4.4.3 Conformance.....	13
4.2.2 Receiver requirements .....	13
4.2.2.1 General requirement.....	13
4.2.2.2 Noise Figure .....	13
4.2.2.2.1 Definition.....	13
4.2.2.2.2 Limits .....	14
4.2.2.2.3 Conformance .....	14
4.2.2.3 Receiver Compression Level .....	14
4.2.2.3.1 Definition.....	14
4.2.2.3.2 Limits .....	14
4.2.2.3.3 Conformance .....	14
4.2.2.4 Receiver selectivity .....	14
4.2.2.4.1 Definition.....	14
4.2.2.4.2 Limit .....	15

4.2.2.4.3	Conformance .....	15
5	Testing for compliance with technical requirements.....	16
5.1	General requirements .....	16
5.2	Environmental conditions for testing .....	16
5.2.1	Test conditions.....	16
5.2.2	Normal temperature and humidity .....	16
5.2.3	Normal test power supply .....	16
5.3	Radio test suites.....	16
5.3.1	Transmitter test specification.....	16
5.3.1.1	Maximum frequency deviation .....	16
5.3.1.2	Transmitter power .....	16
5.3.1.3	Measured B <sub>-40</sub> bandwidth .....	17
5.3.1.4	Measured B <sub>-20</sub> bandwidth .....	17
5.3.1.5	Unwanted emissions.....	17
5.3.1.5.1	Emissions in the Out-of-Band domain .....	17
5.3.1.5.2	Emissions in the spurious domain .....	18
5.3.1.5.3	Stand-by mode emissions .....	18
5.3.2	Receiver test specification .....	19
5.3.2.1	Noise Figure .....	19
5.3.2.2	Receiver Compression Level .....	19
5.3.2.3	Receiver selectivity .....	20
5.3.2.3.1	General setup .....	20
5.3.2.3.2	Disturbing Test Signals .....	20
5.3.2.3.3	Measurement Procedure .....	20
<b>Annex A (informative):</b>	<b>Relationship between the present document and the essential requirements of Directive 2014/53/EU .....</b>	<b>21</b>
<b>Annex B (normative):</b>	<b>Calculation of the B<sub>-40</sub> bandwidth.....</b>	<b>23</b>
<b>Annex C (normative):</b>	<b>Frequency deviation, transmitter power, B<sub>-40</sub>, B<sub>-20</sub> and Out-of-band emissions measurement set-up.....</b>	<b>25</b>
<b>Annex D (normative):</b>	<b>Spurious and stand-by emissions measurement set-up .....</b>	<b>26</b>
<b>Annex E (normative):</b>	<b>Noise Figure measurement set-up .....</b>	<b>28</b>
<b>Annex F (normative):</b>	<b>Compression level and selectivity measurement set-up.....</b>	<b>30</b>
<b>Annex G (informative):</b>	<b>Maximum Measurement Uncertainty.....</b>	<b>32</b>
<b>Annex H (informative):</b>	<b>WR284/WG10 waveguide characteristics.....</b>	<b>33</b>
<b>Annex I (informative):</b>	<b>Checklist .....</b>	<b>35</b>
<b>Annex J (informative):</b>	<b>Bibliography.....</b>	<b>37</b>
History .....		38

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

# Foreword

This draft Harmonised European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI standards EN Approval Procedure.

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.2] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.1].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

The present document is part 2 of a multi-part deliverable covering ground based ATC Primary Surveillance Radars (PSR), as identified below:

- Part 1: "Air Traffic Control (ATC) PSR sensors operating in the frequency band 1 215 MHz to 1 400 MHz (L band)";
- Part 2: "Air Traffic Control (ATC) PSR sensors operating in the frequency band 2 700 MHz to 3 100 MHz (S band)";**
- Part 3: "Air Traffic Control (ATC) PSR sensors operating in the frequency band 8 500 MHz to 10 000 MHz (X band)".

<b>Proposed national transposition dates</b>	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

---

## Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

[SIST EN 303 364-2 V1.1.1:2021](#)

<https://standards.iteh.ai/catalog/standards/sist/5464698f-5121-4b22-a542-28d4900f97ba/sist-en-303-364-2-v1-1-1-2021>



---

# 1 Scope

The present document specifies technical characteristics and methods of measurements for ground based monostatic ATC primary surveillance radars with the following characteristics:

- operating in the 2 700 MHz to 3 100 MHz frequency range;
- transmitter output peak power up to 100 kW;
- the transceiver-antenna connection uses a hollow metallic rectangular waveguide of type WR284/WG10/R32 according to IEC 60153-2 [i.6] with a minimum length between the output of the power amplifier and the input to the antenna of 2,886 m (20 times the wavelength of the waveguide cut-off frequency);
- the antenna rotates, is waveguide-based and passive;
- the transceiver output uses a RF circulator.

NOTE 1: Phased array ATC primary surveillance radars are not covered by the present document.

NOTE 2: The relationship between the present document and essential requirements of article 3.2 of Directive 2014/53/EU [i.1] is given in annex A.

---

## 2 References

### 2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ECC/Recommendation (02)05 (2012): "Unwanted emissions".
- [2] ERC/Recommendation 74-01 (2019): "Unwanted emissions in the spurious domain".
- [3] Recommendation ITU-R M.1177-4 (04/2011): "Techniques for measurement of unwanted emissions of radar systems".

### 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.

- [i.2] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.
- [i.3] ITU Radio Regulations (2020).
- [i.4] Recommendation ITU-R SM.1541-6 (08/2015): "Unwanted emissions in the out-of-band domain".
- [i.5] ETSI EG 203 336 (V1.2.1) (2020): "Guide for the selection of technical parameters for the production of Harmonised Standards covering article 3.1(b) and article 3.2 of Directive 2014/53/EU".
- [i.6] IEC 60153-2 (2016): "Hollow metallic waveguides - Part 2: Relevant specifications for ordinary rectangular waveguides".
- [i.7] Recommendation ITU-R SM.331-4 (07/1978): "Noise and sensitivity of receivers".
- [i.8] Recommendation ITU-R SM.332-4 (07/1978): "Selectivity of receivers".

---

## 3 Definition of terms, symbols and abbreviations

### 3.1 Terms

For the purposes of the present document, the following terms apply:

**active state:** state which produces the authorized emission

**auxiliary receiver:** radar receiver not included in the transceiver

NOTE: For example an auxiliary receiver could be used for high beam antenna pattern.

**dummy load:** device connected to a waveguide or coaxial cable and matched to their impedance (typically 50 Ohms) to absorb the RF energy propagating inside

**equipment under test:** device that is the subject of the specific test investigation being described

**matched filter:** receiver filter that matches the transmitted radar waveform, i.e. this is the filter that maximizes the signal-to-noise ratio of the received pulse

**necessary bandwidth:** width of the frequency band which is just sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions for a given class of emission

NOTE 1: This definition is taken from ITU Radio Regulation [i.3].

NOTE 2: For Primary radars the necessary bandwidth  $B_N$  is considered to be  $B_{.20}$  (20 dB bandwidth) as defined in Recommendation ITU-R SM.1541-6 [i.4].

**occupied bandwidth:** width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage  $\beta/2$  of the total mean power of a given emission

NOTE 1: This definition is taken from ITU Radio Regulation [i.3].

NOTE 2: Unless otherwise specified in an Recommendation ITU-R for the appropriate class of emission, the value of  $(\beta/2)$  should be taken as 0,5 %.

**operating frequencies:** frequencies on which the radar is tuned to operate

**operating mode:** predefined configuration for a given service accessible to the operator of the radar system

NOTE 1: Several operating modes may be available.

NOTE 2: Changing operating mode might affect the radio characteristics of the radar system.

**peak envelope power:** average power supplied to the antenna transmission line by a transmitter during one radio frequency cycle at the crest of the modulation envelope taken under normal operating conditions

NOTE: This definition is taken from ITU Radio Regulation [i.3].

**product configuration:** hardware variant of the same typology of system under test (e.g. different power outputs, magnetrons)

**pulse duration:** time between the 50 % amplitude (voltage) points

**pulse fall time:** time taken for the trailing edge of the pulse to decrease from 90 % to 10 % of the maximum amplitude (voltage)

**pulse rise time:** time taken for the leading edge of the pulse to increase from 10 % to 90 % of the maximum amplitude (voltage)

**receiver output:** output of the digital matched filter function

**system coupler:** directional waveguide coupler with forward and reverse port or only a forward port

NOTE: The system coupler is inserted in the waveguide run between the circulator and the antenna but not directly located behind the antenna. Usually it is located very close behind the circulator.

**unwanted emissions:** spurious emissions and out-of-band emissions

NOTE: This definition is taken from ITU Radio Regulation [i.3].

## 3.2 Symbols

For the purposes of the present document, the following symbols apply:

$B_{-20}$	-20 dB bandwidth below PEP of the spectrum of the transmitted waveform
$B_{-40}$	-40 dB bandwidth below PEP of the spectrum of the transmitted waveform
$B_C$	Chirp bandwidth
$B_N$	Necessary bandwidth
$B_{res}$	3 dB resolution bandwidth of transceiver
dB/dec	dB per decade
$dB_{pp}$	dB with respect to peak power
$D_{no\ spur}$	Detectability Factor
$f_o$	Operating Frequency
$f_{IF}$	Intermediate Frequency
$f_{RF}$	Receiver operating Frequency
$f_{image}$	Image Frequency
$k$	Boltzmann's constant
$f_{LO}$	Local Oscillator Frequency
$P_t$	Pulse power of transmission
$RF$	Radio Frequency
$S/N$	Signal-to-Noise ratio
$t$	Time
$T_C$	Pulse length (of individual chirp waveforms) in seconds
$tp$	Pulse duration
$tr$	Pulse rise time
$tf$	Pulse fall time
$T_0$	Temperature in Kelvin
$\lambda$	Wavelength

## 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AC	Alternating Current
ATC	Air Traffic Control

CW	Continuous Wave
EIA	Electronic Industries Alliance
IEC	International Electrotechnical Commission
IF	Intermediate Frequency
ITU	International Telecommunication Union
na	not available
NF	Noise Factor
OoB	Out-of-Band
PEP	Peak Envelope Power
ppm	parts per million
PSR	Primary Surveillance Radar
RCSC	Radio Components Standardization Committee
RF	Radio Frequency
WG	Waveguide

---

## 4 Technical requirements specifications

### 4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be in accordance with its intended use, but as a minimum, shall be that specified in the test conditions contained in the present document. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the operational environmental profile defined by its intended use.

### 4.2 Conformance requirements

#### 4.2.1 Transmitter requirements

##### 4.2.1.1 Maximum frequency deviation

###### 4.2.1.1.1 Definition

The maximum frequency deviation is the maximum allowed departure from the operating frequency.

###### 4.2.1.1.2 Limits

The maximum frequency deviation of ATC radar systems at the defined operating frequency shall not exceed 1 250 ppm.

NOTE: This value is specified in Appendix 2 of the ITU Radio Regulations [i.3].

###### 4.2.1.1.3 Conformance

The conformance tests are specified in clause 5.3.1.1.

The results obtained shall not exceed the limits specified in clause 4.2.1.1.2.

#### 4.2.1.2 Transmitter power

##### 4.2.1.2.1 Definition

The transmitter power is the peak value of the transmitter pulse power during the transmission pulse (PEP).

NOTE: The transmitter power is measured at the output port of the transceiver.

#### 4.2.1.2.2 Limits

The transmitter power shall not exceed 100 kW (i.e. 80 dBm).

#### 4.2.1.2.3 Conformance

The conformance tests are specified in clause 5.3.1.2.

The results obtained shall not exceed the limit specified in clause 4.2.1.2.2.

#### 4.2.1.3 Measured B<sub>-40</sub> bandwidth

##### 4.2.1.3.1 Definition

The measured -40 dB bandwidth (B<sub>-40</sub>) is the measured bandwidth of the emissions 40 dB below the measured PEP.

##### 4.2.1.3.2 Limits

The measured B<sub>-40</sub> bandwidth shall always be contained within the 2 700 to 3 100 MHz frequency band.

##### 4.2.1.3.3 Conformance


The conformance tests are specified in clause 5.3.1.3.

The results obtained shall not exceed the limit specified in clause 4.2.1.3.2.

#### 4.2.1.4 Unwanted emissions

##### 4.2.1.4.1 General requirements

The Out-of-Band emission limits and the spurious emission limits shall be based on the calculated B<sub>-40</sub> bandwidth as defined in annex B. The OoB and spurious domain boundaries are defined in clause 5.3.1.5.

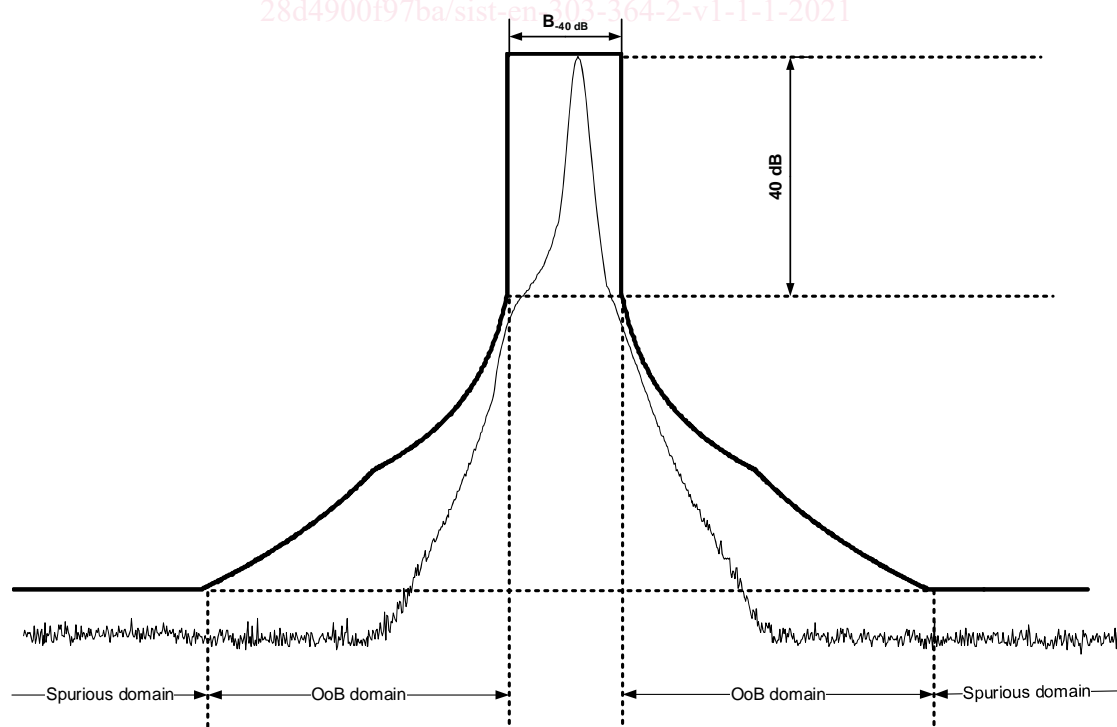

**Figure 1: Definition of OoB and spurious emission domains (case of a single operating frequency) (Not to scale)**