



# SLOVENSKI STANDARD

## SIST EN 303 978 V2.1.1:2016

01-september-2016

---

**Satelitske zemeljske postaje in sistemi (SES) - Harmonizirani standard, ki zajema bistvene zahteve člena 3.2 direktive 2014/53/EU, za zemeljske postaje na mobilnih platformah (ESOMP), ki oddajajo proti satelitom v geostacionarni orbiti in delujejo v frekvenčnih pasovih od 27,5 GHz do 30,0 GHz**

Satellite Earth Stations and Systems (SES) - Harmonised Standard for Earth Stations on Mobile Platforms (ESOMP) transmitting towards satellites in geostationary orbit, operating in the 27,5 GHz to 30,0 GHz frequency bands covering the essential requirements of article 3.2 of the Directive 2014/53/EU

**(standards.iteh.ai)**

[SIST EN 303 978 V2.1.1:2016](https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-c9a4ae3c0de/sist-en-303-978-v2-1-1-2016)

<https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-c9a4ae3c0de/sist-en-303-978-v2-1-1-2016>

**Ta slovenski standard je istoveten z: ETSI EN 303 978 V2.1.1 (2016-05)**

---

**ICS:**

33.060.30      Radiorelejni in fiksni satelitski      Radio relay and fixed satellite  
komunikacijski sistemi      communications systems

**SIST EN 303 978 V2.1.1:2016      en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 303 978 V2.1.1:2016](https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-c9a4ae3c0de/sist-en-303-978-v2-1-1-2016)

<https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-c9a4ae3c0de/sist-en-303-978-v2-1-1-2016>

# ETSI EN 303 978 V2.1.1 (2016-05)



**Satellite Earth Stations and Systems (SES);  
Harmonised Standard for Earth Stations on Mobile Platforms  
(ESOMP) transmitting (towards satellites) in geostationary orbit,  
operating in the 27,5 GHz to 30,0 GHz frequency bands  
covering the essential requirements  
of article 3.2 of the Directive 2014/53/EU**

---

**Reference**

REN/SES-00399

---

**Keywords**antenna, earth station, GSO, mobile, regulation,  
satellite**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**SIST EN 303 978 V2.1.1:2016<https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-c9a4ae3cd433/etsi-en-303-978-v2-1-1-2016>**Important notice**

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2016.

All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**GSM®** and the GSM logo are Trade Marks registered and owned by the GSM Association.

# Contents

Intellectual Property Rights .....	8
Foreword.....	8
Modal verbs terminology.....	8
Introduction .....	8
1 Scope .....	10
2 References .....	11
2.1 Normative references .....	11
2.2 Informative references.....	12
3 Definitions, symbols and abbreviations .....	12
3.1 Definitions .....	12
3.2 Symbols.....	14
3.3 Abbreviations .....	14
4 Technical requirements specifications .....	15
4.1 General .....	15
4.1.1 Environmental profile .....	15
4.1.2 Operational configurations .....	16
4.1.3 Determination of geographic location of the ESOMP .....	16
4.1.4 EIRP <sub>Aggregate</sub> for networks of ESOMPs.....	16
4.1.5 Presentation of equipment for testing purposes .....	16
4.1.6 Choice of model for testing .....	16
4.1.7 Mechanical and electrical design .....	17
4.1.7.0 General.....	17
4.1.7.1 Marking (equipment identification) .....	17
4.1.7.2 Equipment identification.....	17
4.2 Conformance requirements .....	17
4.2.1 Off-axis spurious radiation .....	17
4.2.1.1 Justification .....	17
4.2.1.2 Specification.....	17
4.2.1.3 Conformance tests.....	18
4.2.2 On-axis spurious radiation .....	18
4.2.2.1 Justification .....	18
4.2.2.2 Specification.....	18
4.2.2.2.1 "Carrier-on" radio state.....	18
4.2.2.2.2 "Carrier-off" and "Emissions disabled" radio states .....	19
4.2.2.3 Conformance tests.....	19
4.2.3 Off-axis EIRP emission density within the band .....	19
4.2.3.0 General .....	19
4.2.3.1 Justification .....	19
4.2.3.2 Co-polarized Specification.....	19
4.2.3.3 Void.....	20
4.2.3.4 Cross-polarization Specification .....	20
4.2.3.5 Burst Transmission Specification.....	20
4.2.3.6 Off-axis Geometry Specification .....	20
4.2.3.7 Conformance tests.....	21
4.2.4 Uplink Power Control Specification .....	21
4.2.5 Carrier suppression .....	21
4.2.5.1 Justification .....	21
4.2.5.2 Specification.....	21
4.2.5.3 Conformance tests.....	21
4.2.6 Antenna pointing and polarization alignment .....	21
4.2.6.1 Antenna pointing accuracy.....	21
4.2.6.1.1 Justification .....	21
4.2.6.1.2 Pointing accuracy specification .....	21
4.2.6.1.3 On-axis cross polarization isolation specification .....	22

4.2.6.1.4	Conformance tests .....	22
4.2.6.2	Antenna Pointing Error Detection.....	22
4.2.6.2.0	General .....	22
4.2.6.2.1	Pointing error detection specification.....	22
4.2.6.2.2	Polarization angle alignment specification .....	23
4.2.6.2.3	Conformance tests .....	23
4.2.7	Cessation of emissions.....	23
4.2.7.1	Justification .....	23
4.2.7.2	Specification.....	23
4.2.7.2.1	Specification 1: Mode of cessation of emissions.....	23
4.2.7.2.2	Specification 2: Conditions under which the ESOMP shall cease emissions .....	24
4.2.7.2.3	Specification 3: Cessation of emissions .....	24
4.2.7.2.4	Specification 4: Fault conditions .....	24
4.2.7.3	Conformance tests.....	24
4.2.8	Identification of the ESOMP .....	24
4.2.8.1	Justification .....	24
4.2.8.2	Specification.....	24
4.2.8.3	Conformance tests.....	25
4.2.9	Control and Monitoring Functions (CMFs).....	25
4.2.9.1	ESOMP States.....	25
4.2.9.1.0	General .....	25
4.2.9.1.1	CMF state diagram .....	26
4.2.9.2	Processor monitoring .....	27
4.2.9.2.1	Justification .....	27
4.2.9.2.2	Specification .....	27
4.2.9.2.3	Conformance tests .....	27
4.2.9.3	Transmit subsystem monitoring .....	28
4.2.9.3.1	Justification .....	28
4.2.9.3.2	Specification .....	28
4.2.9.3.3	Conformance tests .....	28
4.2.9.4	Power-on/Reset .....	28
4.2.9.4.1	Justification .....	28
4.2.9.4.2	Specification .....	28
4.2.9.4.3	Conformance tests .....	28
4.2.9.5	Control Channel (CC) and Response Channel (RC) .....	28
4.2.9.5.1	Justification .....	28
4.2.9.5.2	Specification.....	28
4.2.9.5.3	Conformance tests .....	29
4.2.9.6	Network control commands .....	29
4.2.9.6.1	Justification .....	29
4.2.9.6.2	Specification.....	29
4.2.9.6.3	Conformance tests .....	30
4.2.9.7	Initial burst transmission .....	30
4.2.9.7.1	Justification .....	30
4.2.9.7.2	Specification.....	30
4.2.9.7.3	Conformance tests .....	30
4.2.9.8	Inhibition of transmissions.....	30
4.2.9.8.1	Justification .....	30
4.2.9.8.2	Specification.....	30
4.2.9.8.3	Conformance tests .....	30
4.2.10	Receive antenna off-axis gain pattern.....	31
4.2.10.1	Justification .....	31
4.2.10.2	Specification.....	31
4.2.10.3	Conformance tests.....	31
4.2.11	Blocking performance.....	31
4.2.11.1	Justification .....	31
4.2.11.2	Specification.....	31
4.2.11.3	Conformance tests.....	32
4.2.12	Adjacent Signal Selectivity.....	32
4.2.12.1	Justification .....	32
4.2.12.2	Specification.....	32
4.2.12.3	Conformance tests.....	32

5	Testing for compliance with technical requirements.....	32
5.1	Environmental conditions for testing .....	32
5.2	Radio test suites.....	32
6	Test methods for all aspects of the ESOMP .....	33
6.1	General .....	33
6.1.0	Introduction.....	33
6.1.1	Interpretation of measurement results .....	33
6.1.2	Measuring receiver .....	34
6.2	Off-axis spurious radiation .....	35
6.2.0	Introduction.....	35
6.2.1	Test method .....	35
6.2.1.0	Test method introduction .....	35
6.2.1.1	General .....	35
6.2.1.2	Multi-carrier operation.....	35
6.2.2	Measurements up to 1 000 MHz .....	36
6.2.2.1	Test site .....	36
6.2.2.2	Measuring receivers .....	36
6.2.2.3	Procedure .....	36
6.2.3	Measurements above 1 000 MHz .....	36
6.2.3.0	General .....	36
6.2.3.1	Identification of the significant frequencies of spurious radiation .....	37
6.2.3.1.1	Test site.....	37
6.2.3.1.2	Procedure.....	37
6.2.3.2	Measurement of radiated power levels of identified spurious radiation.....	37
6.2.3.2.1	Test site.....	37
6.2.3.2.2	Procedure.....	38
6.2.3.3	Measurement of conducted spurious radiation at the antenna flange.....	39
6.2.3.3.1	Test site.....	39
6.2.3.3.2	Procedure.....	39
6.3	On-axis spurious radiation.....	40
6.3.1	Test method .....	40
6.3.1.0	General .....	40
6.3.1.1	Test site .....	40
6.3.1.2	Method of measurement.....	40
6.3.1.2.1	General .....	40
6.3.1.2.2	Method of measurement at the antenna flange .....	40
6.3.1.2.3	Method of measurement for an EUT with antenna.....	41
6.4	Off-axis EIRP emission density within the band.....	42
6.4.1	Test method .....	42
6.4.1.0	Introduction.....	42
6.4.1.1	Transmit output power density.....	42
6.4.1.1.1	General .....	42
6.4.1.1.2	Test site.....	42
6.4.1.1.3	Method of measurement .....	42
6.4.1.2	Antenna transmit gain .....	43
6.4.1.2.1	General .....	43
6.4.1.2.2	Test site.....	43
6.4.1.2.3	Method of measurement .....	44
6.4.1.3	Antenna transmit radiation patterns .....	45
6.4.1.3.1	General .....	45
6.4.1.3.2	Test site.....	45
6.4.1.3.3	Test arrangement .....	45
6.4.1.3.4	Co-polar radiation pattern - azimuth.....	45
6.4.1.3.5	Co-polar radiation pattern - elevation.....	46
6.4.1.3.6	Cross-polar radiation pattern - azimuth .....	46
6.4.1.3.7	Cross-polar radiation pattern - elevation .....	47
6.4.2	Computation of results.....	47
6.5	Carrier suppression.....	47
6.5.1	Test method .....	47
6.6	Antenna pointing .....	48
6.6.1	General.....	48

6.6.2	Test method .....	48
6.7	Polarization angle alignment capability .....	48
6.7.0	General.....	48
6.7.1	Test method .....	48
6.8	Cessation of emissions of the ESOMP.....	48
6.8.0	General.....	48
6.8.1	Test Method.....	49
6.8.1.1	Required documentation .....	49
6.8.1.2	Cessation of emissions from the "Transmission enabled" state .....	49
6.8.1.3	Cessation of emission from the "Transmission disabled" state .....	49
6.8.1.4	Cessation of emission from the "Initial Phase" state.....	49
6.8.1.4.1	EUTs transmitting initial bursts.....	49
6.8.1.4.2	EUTs not transmitting initial bursts.....	50
6.8.1.5	"Single action" means of cessation of emissions.....	50
6.8.1.6	Fault conditions.....	51
6.9	Identification of ESOMP.....	51
6.9.1	Test arrangement .....	51
6.9.2	Test method .....	51
6.10	Control and monitoring functions .....	51
6.10.0	General.....	51
6.10.1	Test arrangement .....	51
6.10.2	Processor monitoring- Test method .....	51
6.10.3	Transmit subsystem monitoring-Test method.....	52
6.10.4	Power-on/Reset-Test method.....	52
6.10.5	Control Channel and Response Channel -Test method.....	52
6.10.6	Network Control commands-Test method .....	53
6.10.7	Initial burst transmission-Test method.....	55
6.10.8	Inhibition of transmission-Test method.....	55
6.11	Receive antenna off-axis gain pattern .....	55
6.11.1	Test method .....	55
6.11.1.1	Test site .....	55
6.11.1.2	Method of measurement .....	55
6.11.1.3	Computation .....	56
6.12	Blocking performance .....	56
6.12.1	Test method .....	56
6.13	Adjacent Signal Selectivity .....	57
6.13.1	Test method .....	57
<b>Annex A (normative):</b>	<b>Relationship between the present document and the essential requirements of Directive 2014/53/EU .....</b>	<b>58</b>
<b>Annex B (informative):</b>	<b>Linear Polarization Alignment Error Calculation .....</b>	<b>60</b>
<b>Annex C (normative):</b>	<b>Radiated measurement.....</b>	<b>61</b>
C.1	Test sites and general arrangements for measurements involving the use of radiated fields.....	61
C.1.0	General .....	61
C.1.1	Anechoic Chamber .....	61
C.1.2	Anechoic Chamber with a conductive ground plane .....	62
C.1.3	Open Area Test Site (OATS) .....	63
C.1.4	Minimum requirements for test sites for measurements above 18 GHz.....	64
C.1.5	Test antenna.....	64
C.1.6	Substitution antenna .....	65
C.1.7	Measuring antenna .....	65
C.2	Guidance on the use of radiation test sites .....	65
C.2.0	General .....	65
C.2.1	Verification of the test site .....	65
C.2.2	Preparation of the EUT.....	65
C.2.3	Power supplies to the EUT .....	65
C.2.4	Range length.....	66
C.2.5	Site preparation .....	66



C.3	Coupling of signals.....	67
C.3.1	General .....	67
C.4	Standard test methods.....	67
C.4.0	General .....	67
C.4.1	Calibrated setup.....	67
C.4.2	Substitution method.....	67
<b>Annex D (normative):</b>	<b>Conducted measurements .....</b>	<b>69</b>
<b>Annex E (informative):</b>	<b>General Requirements for RF Cables.....</b>	<b>70</b>
<b>Annex F (informative):</b>	<b>RF Waveguides .....</b>	<b>71</b>
<b>Annex G (informative):</b>	<b>Bibliography.....</b>	<b>72</b>
History .....		73

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 303 978 V2.1.1:2016](https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-c9a4ae3c0de/sist-en-303-978-v2-1-1-2016)

<https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-c9a4ae3c0de/sist-en-303-978-v2-1-1-2016>

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Foreword

This Harmonised European Standard (EN) has been produced by ETSI Technical Committee Satellite Earth Stations and Systems (SES).

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.9] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [6].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

### National transposition dates

Date of adoption of this EN:	<a href="https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-3c0de/sist-en-303-978-v2-1-1-2016">SIST EN 303 978 V2.1.1:2016</a>	16 May 2016
Date of latest announcement of this EN (doa):	<a href="https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-3c0de/sist-en-303-978-v2-1-1-2016">3c0de/sist-en-303-978-v2-1-1-2016</a>	31 August 2016
Date of latest publication of new National Standard or endorsement of this EN (dop/e):		28 February 2017
Date of withdrawal of any conflicting National Standard (dow):		28 February 2018

## Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

## Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio equipment within the scope of the Directive 2014/53/EU [6]. The modular structure is shown in ETSI EG 201 399 [i.3].

The present document is partly based on ETSI EN 301 459 [i.6] and ETSI EN 301 360 [i.7].

The present document may also be applicable to the frequency bands 30,0 GHz to 31,0 GHz (Earth-to-space) and 20,2 GHz to 21,2 GHz (space-to-Earth) subject to national regulation.

Annex A (normative) provides HS Requirements specifications.

Annex B (informative) provides information on Linear Polarization Alignment Error Calculation.

Annex C (normative) provides specifications concerning radiated measurements.

Annex D (normative) provides specifications concerning conducted measurements.

Annex E (informative) provides general information concerning RF cables.

Annex F (informative) provides information concerning RF waveguides.

Annex G (informative) covers other supplementary information.

## **iTeh STANDARD PREVIEW (standards.iteh.ai)**


[SIST EN 303 978 V2.1.1:2016](https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-c9a4ae3c0de/sist-en-303-978-v2-1-1-2016)

<https://standards.iteh.ai/catalog/standards/sist/a114e86a-50a9-4a2b-9811-c9a4ae3c0de/sist-en-303-978-v2-1-1-2016>

# 1 Scope

The present document applies to Earth Stations on Mobile Platforms (ESOMP), which have the following characteristics.

Enclosure / Radome

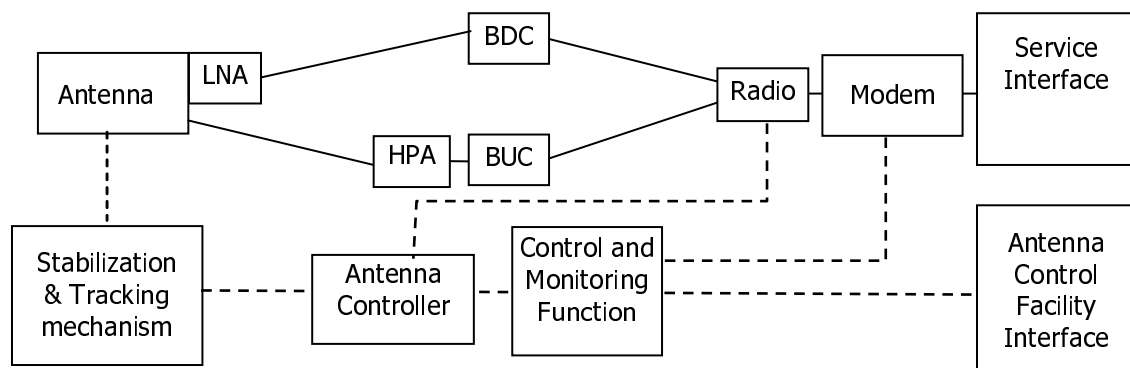

**Figure 1: ESOMP System Overview**

- The ESOMP is designed for both mobile and stationary operation.
- The ESOMP operates on various mobile platforms such as trains, maritime vessels, aircraft and other vehicles and, therefore, may be subject to occasional disturbances and interruptions in the satellite link.
- The ESOMP is operating as part of a satellite network (e.g. star, mesh or point-to-point) used for the distribution and/or exchange of information.
- The ESOMP is comprised of all the equipment, electrical and mechanical, from the antenna itself to the interface with other communications equipment on a mobile platform (usually referred to as the terrestrial interface).
- The transmit and receive frequencies are shown in table 1.

**Table 1: Frequency bands**

	Frequency Bands/frequencies (GHz)
Transmit (Earth-to-space)	27,50 to 30,00
Receive (space-to-Earth)	17,30 to 20,20

- The ESOMP transmits within the frequency range from 27,50 GHz to 30,00 GHz, which is a band allocated to the Fixed Satellite Services (FSS) (Earth-to-space) among other services. However, operation of the ESOMP is intended to be restricted to the frequency range 29,50 GHz to 30,00 GHz in and near those countries that have allocated Fixed Service (FS) to the other frequency ranges. Local regulation may permit operation in these frequency ranges.
- The ESOMP receives in one or more frequencies within the range from 17,30 GHz to 20,20 GHz (FSS).
- The ESOMP uses linear or circular polarization.
- The ESOMP operates through a geostationary satellite (or a cluster of co-located geostationary satellites) that is at least 2° away from any other geostationary satellite operating in the same frequencies and over the same coverage area.

NOTE 1: ESOMPs may operate with satellites that are more closely spaced than 2° with additional operational constraints that are beyond the scope of the present document.

- The ESOMP is designed for unattended operation.

- The ESOMP is controlled and monitored by a Network Control Facility (NCF). This function may be performed centrally (e.g. for a network of ESOMPs with a central hub) or it could be performed within the ESOMP for autonomous control. The NCF is outside the scope of the present document.

The present document applies to the ESOMP with its ancillary equipment and its various telecommunication ports, and when operated within the boundary limits of the operational environmental profile as declared by the applicant and when installed as required by the applicant's declaration or in the user documentation.

The present document is intended to cover the provisions of Directive 2014/53/EU [6] (RE Directive) article 3.2, which states that "... *radio equipment shall be so constructed that it both effectively uses and supports the efficient use of radio spectrum in order to avoid harmful interference*".

NOTE 2: Operational requirements are defined by national administrations and by relevant ECC Decisions.

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the Directive 2014/53/EU [6] may apply to equipment within the scope of the present document.

NOTE 3: A list of such ENs is included on the web site <http://www.newapproach.org/>.

---

## 2 References

### 2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TR 100 028 (all parts) (V1.4.1) (12-2001): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [2] ETSI TR 102 273 (all parts) (V1.2.1) (12-2001): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties".
- [3] ANSI C63.5 (2006): "American National Standard for Calibration of Antennas Used for Radiated Emission Measurements in Electro Magnetic Interference".
- [4] CISPR 16-1-1 Ed.3.0 (2010): "Specification for radio disturbance and immunity measuring apparatus and methods - Part 1-1: Radio disturbance and immunity measuring apparatus - Measuring apparatus".
- [5] CISPR 16-1-4 Ed.3.0 (2010): "Specification for radio disturbance and immunity measuring apparatus and methods - Part 1-4: Radio disturbance and immunity measuring apparatus - Antennas and test sites for radiated disturbance measurements".
- [6] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC (RE Directive).

## 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Void.
- [i.2] Void.
- [i.3] ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of Harmonized Standards for application under the Radio & Telecommunication Terminal Equipment Directive 1999/5/EC (R&TTE) and a first guide on the impact of the Radio Equipment Directive 2014/53/EU (RED) on Harmonized Standards".
- [i.4] ETSI TR 102 375: "Satellite Earth Stations and Systems (SES); Guidelines for determining the parts of satellite earth station antenna radiation patterns concerned by the geostationary satellite orbit protection".
- [i.5] ETSI TS 103 052: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Radiated measurement methods and general arrangements for test sites up to 100 GHz".
- [i.6] ETSI EN 301 459: "Satellite Earth Stations and Systems (SES); Harmonized EN for Satellite Interactive Terminals (SIT) and Satellite User Terminals (SUT) transmitting towards satellites in geostationary orbit in the 29,5 GHz to 30,0 GHz frequency bands covering essential requirements under article 3.2 of the R&TTE Directive".
- [i.7] ETSI EN 301 360: "Satellite Earth Stations and Systems (SES); Harmonized EN for Satellite Interactive Terminals (SIT) and Satellite User Terminals (SUT) transmitting towards geostationary satellites in the 27,5 GHz to 29,5 GHz frequency bands covering essential requirements under article 3.2 of the R&TTE Directive".
- [i.8] Void.
- [i.9] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.
- [i.10] IEC 153 (all parts): "Hollow metallic waveguides".

---

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in Directive 2014/53/EU [6] and the following apply:

**ancillary equipment:** equipment used in connection with an ESOMP

NOTE: Equipment is considered as ancillary if the three following conditions are met:

- the equipment is intended for use in conjunction with the ESOMP to provide additional operational and/or control features (e.g. to extend control to another position or location); and
- the equipment cannot be used on a stand alone basis, to provide user functions independently of the ESOMP; and

- the absence of the equipment does not inhibit the operation of the ESOMP.

**antenna controller:** equipment used to maintain antenna stabilization and tracking accuracy based on inputs from the Control and Monitoring Function

**applicant:** manufacturer or his authorized representative within the European Community or the person responsible for placing the apparatus on the market

**carrier-off radio state:** radio state in which the ESOMP may transmit and does not transmit any carrier

NOTE 1: The phrase "the ESOMP may transmit" means that all the conditions for transmission are satisfied (e.g. in a state where transmissions are permitted, no failure detected, and the ESOMP is correctly pointed towards the satellite).

NOTE 2: The existence of a "Carrier-off" radio state depends on the system of transmission used. For ESOMPs designed for continuous transmission mode there may be no "Carrier-off" state.

**carrier-on radio state:** radio state in which the ESOMP may transmit and transmits a carrier

**Control Channel (CC):** channel or channels by which ESOMPs receive control information from the NCF

**EIRP<sub>Aggregate</sub>:** sum of the EIRP (Watts) within the nominated bandwidth of the ESOMP network

**EIRP<sub>max</sub>:** maximum EIRP capability of the ESOMP as declared by the applicant

**emissions disabled radio state:** radio state in which the ESOMP is not emitting

NOTE: Examples of cases where the ESOMP is in this radio state: before system monitoring pass, before the control channel is received when a failure is detected, when an ESOMP is commanded to disable, and when the ESOMP is in a location requiring cessation of emissions.

**external control channel:** control channel which is either:

- carried by the ESOMP network via the same or another satellite, but not within the internal protocol of the ESOMP system; or
- carried by any other radio communication system.

**external response channel:** response channel which is either:

- carried by the ESOMP network via the same or another satellite, but not within the internal protocol of the ESOMP system; or
- carried by any other radio communication system.

**integral antenna:** antenna which may not be removed during the tests according to the applicant's statement

**internal control channel:** control channel which is carried by the ESOMP network via the same satellite as used for transmission of user data and within the internal protocol structure of the ESOMP system

**internal response channel:** response channel which is carried by the ESOMP network via the same satellite as used for transmission of user data and within the internal protocol structure of the ESOMP system

**mobile platform:** any non-stationary platform such as a train, a vessel, an aircraft or other vehicles

**Network Control Facility (NCF):** set of functional entities that, at system level, monitor and control the correct operation of the ESOMP and, if appropriate, all of the ESOMPs in a network

**nominal antenna diameter:** antenna diameter declared by the manufacturer that is a parameter in performance characteristics and that allows reference to a certain performance

NOTE: An antenna with circular aperture of diameter equal to the nominal diameter does typically have the performance specified.