
Brezžični prenos električne energije s tehnologijami, ki ne uporabljajo radiofrekvenčnega snopa v območjih 19–21 kHz, 59–61 kHz, 79–90 kHz, 100–300 kHz, 6765–6795 kHz - Harmonizirani standard, ki zajema bistvene zahteve člena 3.2 direktive 2014/53/EU

Wireless power transmission using technologies other than radio frequency beam in the 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz ranges - Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 303 417 V1.1.1:2017](https://standards.iteh.ai/catalog/standards/sist/55fbcf68-3d4b-42af-be37-8ae936af5cf6/sist-en-303-417-v1-1-1-2017)

<https://standards.iteh.ai/catalog/standards/sist/55fbcf68-3d4b-42af-be37-8ae936af5cf6/sist-en-303-417-v1-1-1-2017>

Ta slovenski standard je istoveten z: ETSI EN 303 417 V1.1.1 (2017-09)

ICS:

33.060.99	Druga oprema za radijske komunikacije	Other equipment for radiocommunications
-----------	---------------------------------------	---

SIST EN 303 417 V1.1.1:2017 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 303 417 V1.1.1:2017](https://standards.iteh.ai/catalog/standards/sist/55fbcf68-3d4b-42af-be37-8ae936af5cf6/sist-en-303-417-v1-1-1-2017)

<https://standards.iteh.ai/catalog/standards/sist/55fbcf68-3d4b-42af-be37-8ae936af5cf6/sist-en-303-417-v1-1-1-2017>

ETSI EN 303 417 V1.1.1 (2017-09)



**Wireless power transmission systems, using technologies
other than radio frequency beam in the 19 - 21 kHz,
59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz,
6 765 - 6 795 kHz ranges;
Harmonised Standard covering the essential requirements
of article 3.2 of Directive 2014/53/EU**

ReferenceDEN/ERM-TG28-527

Keywordsharmonised standard, radio, testing, WPT

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Important notice

<https://standards.iteh.ai/catalog/standards/sist/55fbcf68-3d4b-42af-be37-86c23dabc058-en-303-417-v1-1-1-2017>
The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2017.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	5
Introduction	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	8
3 Definitions, symbols and abbreviations	9
3.1 Definitions	9
3.2 Symbols.....	10
3.3 Abbreviations	10
4 Technical requirements specifications	10
4.1 Environmental conditions.....	10
4.2 General	11
4.2.1 Background information	11
4.2.2 Wanted performance criteria.....	11
4.2.3 WPT operational modes.....	11
4.2.4 Presentation of equipment for testing purposes	14
4.2.4.1 General	14
4.2.4.2 Choice of model for testing.....	14
4.2.4.3 Testing of WPT systems	14
4.2.4.4 On-site testing	14
4.2.5 Mechanical and electrical design.....	14
4.2.5.1 General	14
4.2.5.2 Controls	14
4.2.5.3 Shut-off facility	15
4.3 Transmitter conformance requirements.....	15
4.3.1 General.....	15
4.3.2 Permitted range of operating frequencies	15
4.3.2.1 Applicability.....	15
4.3.2.2 Description	15
4.3.2.3 Limits	15
4.3.2.4 Conformance.....	15
4.3.3 Operating frequency range(s) (OFR)	15
4.3.3.1 Applicability.....	15
4.3.3.2 Description	15
4.3.3.3 Limits	16
4.3.3.4 Conformance.....	16
4.3.4 H-field requirements	17
4.3.4.1 Applicability.....	17
4.3.4.2 Description	17
4.3.4.3 Limits	17
4.3.4.4 Conformance.....	17
4.3.5 Transmitter spurious emissions.....	17
4.3.5.1 Applicability.....	17
4.3.5.2 Description	17
4.3.5.3 Limits	18
4.3.5.4 Conformance.....	19
4.3.6 Transmitter out of band (OOB) emissions	19
4.3.6.1 Applicability.....	19
4.3.6.2 Description	19
4.3.6.3 Limits	19
4.3.6.4 Conformance.....	19

4.3.7	WPT system unwanted conducted emissions	20
4.3.7.1	Applicability.....	20
4.3.7.2	Description	20
4.3.7.3	Limits	20
4.3.7.4	Conformance.....	20
4.4	Receiver Conformance requirements	20
4.4.1	General.....	20
4.4.2	Receiver blocking	20
4.4.2.1	Applicability.....	20
4.4.2.2	Description	20
4.4.2.3	Limits	20
4.4.2.4	Conformance.....	21
5	Testing for compliance with technical requirements.....	21
5.1	Environmental conditions for testing	21
5.2	General conditions for testing	21
5.2.1	Product information	21
5.3	Normal and extreme test conditions	21
5.4	Test power source.....	21
5.5	Normal test conditions.....	21
5.6	Extreme test conditions	22
5.7	Auxiliary test equipment	22
5.8	Normal test signals and test modulation.....	22
5.9	Test sites and general arrangements for radiated measurements	22
5.10	Measuring receiver	22
5.11	Measurement uncertainty	22
6	Conformance methods of measurement for transmitters and receivers	22
6.1	Measurement setup and alignment conditions.....	22
6.1.1	General.....	22
6.1.2	Mode 1: idle mode	23
6.1.3	Mode 2: charging adjustment.....	23
6.1.4	Mode 3 and Mode 4: power transmission arrangement.....	24
6.1.5	Receiver test.....	25
6.2	Conformance methods of measurement for transmitting parts within the WPT system	25
6.2.1	General.....	25
6.2.2	Measurement receiver.....	26
6.2.3	WPT system unwanted radiated emissions > 30 MHz.....	26
6.2.4	WPT system unwanted conducted emissions	27
6.3	Conformance methods of measurement for the receiving parts with a WPT System	28
6.3.1	Receiver spurious emissions	28
6.3.2	Test Receiver blocking	28
Annex A (informative):	Relationship between the present document and the essential requirements of Directive 2014/53/EU	30
Annex B (normative):	Measurement setup for EV WPT systems	31
Annex C (informative):	Bibliography	33
History		34

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Harmonised European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.6] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.3]. <https://standards.iteh.ai/catalog/standards/sist/55fbcf68-3d4b-42af-be37-8ae936af5cf5/sist-en-303-417-v1-1-1-2017>

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in Table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

National transposition dates

Date of adoption of this EN:	14 August 2017
Date of latest announcement of this EN (doa):	30 November 2017
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 May 2018
Date of withdrawal of any conflicting National Standard (dow):	31 May 2019

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Introduction

The present document has been prepared to conform to the requirements of the new Radio Equipment Directive 2014/53/EU [i.3]. The present document covers wireless power transmission (WPT) systems using technologies other than radio frequency beam in the frequency ranges 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz.

In the context of the present document "power transmission via radio frequency beam" means power transmission by radio waves.

For the clarification of open questions for high power wireless power transmission systems to charge vehicles a SRdoc ETSI TR 103 409 [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.

The present document is structured as follows:

Clauses 1 through 3 provide a general description on the types of equipment covered by the present document and the definitions, symbols and abbreviations used.

Clause 4 provides the technical requirements specifications, limits and conformance relative to transmitter and receiver.

Clause 5 specifies the conditions for testing of the equipment and interpretation of the measurement results with the maximum measurement uncertainty values.

Clause 6 specifies the required measurement methods.

Annex A (informative) provides the relationship between the present document and the essential requirements of Directive 2014/53/EU [i.3].

Annex B (normative) provides the measurement setup specifically for Electric Vehicles.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/55fbcf68-3d4b-42af-be37-8ae936af5cf6/sist-en-303-417-v1-1-1-2017>

1 Scope

The present document specifies technical characteristics and methods of measurements for wireless power transmission (WPT) systems, using technologies other than radio frequency beam, in the 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz ranges.

The present document covers wireless power transmission systems which are regarded as radio equipment since including inherent radio communication functionality or radiodetermination via the WPT interface or port at the specific WPT frequency ranges.

Such systems usually consist of:

- 1) A power transmitter, with additional communication capability to control the charge function, in conjunction with the receiving part. The power transmitter could also be named as base station.
- 2) A power receiver, which supplies the received energy to a mobile device and performs a control/supervision function for the mobile device status and charge operation.

Both parts in combination are able to transmit and receive data in addition to the power transmission mode e.g. to control the mobile device status and to optimize the power transmission mode.

These radio equipment types are capable of operating in the permitted frequency bands below 30 MHz as specified in Table 1.

The present document covers fixed systems, mobile and portable systems.

Table 1: WPT systems within the permitted frequency bands below 30 MHz

	WPT frequency range	Frequency Bands	Applications
Transmit and Receive	1	19 kHz to 21 kHz	WPT systems
Transmit and Receive	2	59 kHz to 61 kHz	WPT systems
Transmit and Receive	3	79 kHz to 90 kHz	WPT systems
Transmit and Receive	4	100 kHz to 119 kHz	WPT systems
Transmit and Receive		119 kHz to 140 kHz	WPT systems
Transmit and Receive		140 kHz to 148,5 kHz	WPT systems
Transmit and Receive		148,5 kHz to 300 kHz	WPT systems
Transmit and Receive	5	6 765 kHz to 6 795 kHz	WPT systems

NOTE 1: The frequency ranges listed in Table 1 are also used for generic inductive short range devices, according to ETSI EN 300 330 [1].

NOTE 2: The limits and the frequency ranges of the present document are EU wide harmonised according to EC Decision 2013/752/EU [i.2] and CEPT/ERC/REC 70-03 [i.1].

NOTE 3: In addition, it should be noted that other frequency bands may be available in a country within the frequency range below 30 MHz.

The present document covers the essential requirements of article 3.2 of Directive 2014/53/EU [i.3] under the conditions identified in Annex A.

2 References

2.1 Normative references

References are specific, identified by date of publication and/or edition number or version number. Only the cited version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 300 330 (V2.1.1) (02-2017): "Short Range Devices (SRD); Radio equipment in the frequency range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] CEPT/ERC/REC 70-03: "Relating to the use of Short Range Devices (SRD)".
- [i.2] EC Decision 2013/752/EU: "Commission implementing Decision of 11 December 2013 amending Decision 2006/771/EC on harmonisation of the radio spectrum for use by short-range devices and repealing Decision 2005/928/EC".
- [i.3] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws, regulations, administrative provisions and standards of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC. Text with EEA relevance.
- [i.4] ETSI TR 103 409: "System Reference document (SRdoc); Wireless Power Transmission (WPT) systems for Electric Vehicles (EV) operating in the frequency band 79 - 90 kHz".
- [i.5] Void.
- [i.6] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.
- [i.7] Void.
- [i.8] Void.
- [i.9] Void.
- [i.10] CISPR document CIS/B/678/CD: "Amendment 2 Fragment 1 to CISPR 11 Ed. 6: Industrial, scientific and medical equipment - Radio-frequency disturbance characteristics - Limits and methods of measurement - Requirements for air-gap wireless power transfer (WPT)".
- [i.11] Void.
- [i.12] IEC 61980-1:2015: "Electric vehicle wireless power transfer (WPT) systems - Part 1: General requirements".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ETSI EN 300 330 [1] and the following apply:

99% OBW function: measurement function of a spectrum analyser

alignment: process or mechanical implementation of finding the relative position of base station and mobile device which allows a safe and efficient power transmission

NOTE: This alignment leads to the mechanical arrangement in which the WPT system is designed to operate.

base station: term used for the stationary part of the Wireless Power Transmission (WPT) system, a combination of a coil, communication device and/or connection to an energy supply

NOTE: Other expressions: charger, charging pad or primary coil.

co-location: WPT systems are designed to work within an alignment

NOTE: All operation modes require such a close proximity between the parts of the WPT system compared to the wave-length that all the parts of the WPT system can be seen as co-located.

Electric Vehicle (EV): vehicle using one or more electric motors for propulsion

mobile device: term used for the mobile part of the Wireless Power Transmission (WPT) system, comprising the combination of a coil, communication device and/or energy storage in one housing

Occupied Bandwidth (OBW): width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to 0,5 % of the total mean power of a given emission

NOTE: See Figure 1. <https://standards.iteh.ai/catalog/standards/sist/55fbcf68-3d4b-42af-be37-8ae936af5cf6/sist-en-303-417-v1-1-1-2017>

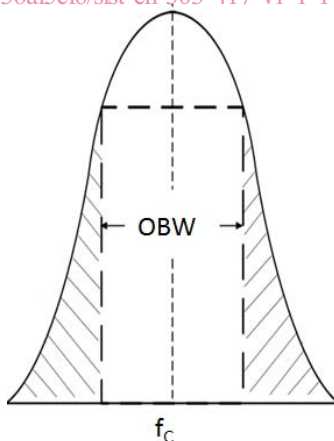


Figure 1: Occupied bandwidth (OBW)

power transmission via radio frequency beam: power transmission by radio waves are working in contrast to WPT systems in the scope of the present document typically over larger distances between base station and mobile device (i.e. distance \gg wavelength)

sub-mode: different emissions of an WPT system during one operational cycle within one operational mode (see Table 2)

test volume: volume in which the representative geometrical WPT system is in, including all cables, auxiliaries, etc.

vehicle emulator: necessary transmitting/receiving parts for a EV Wireless Power Transmission (WPT) test system (coil, communication device and representative mechanical vehicular arrangement)

worst-case alignment: alignment of primary coil (in the base station) and secondary coil (in the mobile device) which represents the worst case (e.g. with regards to emissions or efficiency)

NOTE: Typically, this is the case of lowest coupling between primary and secondary coil.

WPT system: combination of base station (stationary part) and mobile device for the typical use-cases, see clause 4.2.3

WPT system cycle time: time of a WPT system during one operation cycle in each operational mode

NOTE: This cycle time could include: power transmission, communication from base station / mobile device and back. These entire sub-operational modes could be on different frequencies.

3.2 Symbols

For the purposes of the present document, the symbols given in ETSI EN 300 330 [1] and the following apply:

D maximum communication distance D for mode 2

NOTE: See Table 2.

d measurement distance
L1, L2 connection points for ISN

NOTE: See clause 6.2.4.

iTech STANDARD PREVIEW

3.3 Abbreviations (standards.iteh.ai)

For the purposes of the present document, the abbreviations given in ETSI EN 300 330 [1] and the following apply:

AMN	Artificial Mains Network
EV	Electric Vehicle
ISN	Impedance Stabilization Network
OATS	Open Area Test Site
OBW	Occupied BandWith
OFR	Operating Frequency Range
OOB	Out-Of-Band
RX	Receive
SAC	Semi Anechoic Chamber
TX	Transmit
WPT	Wireless Power Transmission

4 Technical requirements specifications

4.1 Environmental conditions

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the manufacturer. The equipment shall comply with all the technical requirements of the present document which are identified as applicable in Annex A at all times when operating within the boundary limits of the declared operational environmental profile. The test conditions are defined in clause 5.3.