



Designation: D 5079 – 02 (Reapproved 2006)

Standard Practices for Preserving and Transporting Rock Core Samples¹

This standard is issued under the fixed designation D 5079; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 These practices cover the preservation, transportation, storage, cataloging, retrieval, and post-test disposition of rock core samples obtained for testing purposes and geologic study.

1.2 These practices apply to both hard and soft rock, but exclude ice and permafrost.

1.3 These practices do not apply to those situations in which changes in volatile gas components, contamination of the pore fluids, or mechanical stress relaxation affect the intended use for the core.

1.4 *This practice offers a set of instruction for performing one or more specific operations. This document cannot replace education or experience and should be used in conjunction with professional judgement. Not all aspects of this practice may be applicable in all circumstances. This ASTM standard is not intended to represent or replace the standard of care by which the adequacy of a given professional service must be judged, nor should this document be applied without consideration of a project's many unique aspects. The word "Standard" in the title of this document means only that the document has been approved through the ASTM consensus process.*

1.5 *This standard does not purport to address the safety problems associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 *ASTM Standards:*²

D 420 Guide to Site Characterization for Engineering Design and Construction Purposes

D 653 Terminology Relating to Soil, Rock, and Contained Fluids

D 2113 Practice for Rock Core Drilling and Sampling of Rock for Site Investigation

¹ These practices are under the jurisdiction of ASTM Committee D18 on Soil and Rock and are the direct responsibility of Subcommittee D18.12 on Rock Mechanics.

Current edition approved May 1, 2006. Published June 2006. Originally approved in 1990. Last previous edition approved in 2002 as D 5079-02.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

D 4220 Practices for Preserving and Transporting Soil Samples

2.2 *API Standard:*

API RP-40 Recommended Practice for Core Analysis Procedure³

3. Terminology

3.1 *Definitions of Terms Specific to This Standard:* See Terminology D 653 for general definitions.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *critical care*—samples which are fragile or fluid or temperature sensitive. This protection level includes the requirements prescribed for routine and special care.

3.2.2 *routine care*—non-sensitive, non-fragile samples for which only general visual identification is necessary, and samples which will not change or deteriorate before laboratory testing.

3.2.3 *soil-like care*—materials which are so poorly consolidated that soil sampling procedures must be employed to obtain intact pieces of core.

3.2.4 *special care*—fluid sensitive samples and those which must later be subjected to testing. Requirements for this level of protection include those prescribed for routine care.

4. Significance and Use

4.1 The geologic characteristics and the intended use of the rock core samples determine the extent and type of preservation required. If engineering properties are to be determined for the core, it must be handled and preserved in such a way that the measured properties are not significantly influenced by mechanical damage, changes in chemistry, and environmental conditions of moisture and temperature, from the time that the core is recovered from the core drill until testing is performed. Drill core is also the sample record for the subsurface geology at the borehole location, and as such must be preserved for some period of time, in some cases indefinitely, for future geologic study.

4.2 These practices present a selection of curatorial requirements which apply to the majority of projects. The requirements are given for a variety of rock types and project types ranging from small to large and from noncritical to critical.

³ Available from American Petroleum Institute, 1220 L Street, Washington, DC 20005.

*A Summary of Changes section appears at the end of this standard.

Noncritical projects are those in which failure of an element or the structure would result in negligible risk of injury and property loss, while there is great risk to property and life after failure of critical structures and projects. Guidance is given for the selection of those specific requirements which should be followed for a given project.

5. Guide for Implementation

5.1 A qualified person shall be assigned to have curatorial management responsibility for a given project. This person shall be technically competent in the management of rock core samples and shall have a knowledge of the various end uses for the cores and their associated preservation requirements. This responsible person shall have the authority to implement the requirements selected from these practices. In some cases, he or she may also have to decide between competing uses for the same core.

5.2 The responsible person shall select from Sections 6-11 those requirements and procedures that should be applied for the core from a particular project. The curatorial manager shall then see that these procedures are implemented, and also see that the records specified in Section 12 are kept.

5.3 The following factors should be considered when selecting the curatorial requirements from Sections 6-11:

5.3.1 Project requirements for use of the core range from simple ones, in which the only need is to identify and locate the various lithologic units, to complex and critical ones in which detailed property testing of the core is required for engineering design. Priorities for multiple uses or different types of tests must sometimes be established when available core lengths are limited and when one use or test precludes another. For example, splitting a core for detailed geologic study prevents later strength testing, which requires an intact core.

5.3.2 Mechanical property tests for structural design purposes should be performed on a core in its natural moisture state, particularly if the rocks are argillaceous. Irreversible changes occur when such rocks are allowed to dry out, often resulting in invalid design data. The initial moisture content of such a core should therefore be preserved.

5.3.3 Freezing of pore water in the core may reduce the strength of the rock. The high temperature associated with unventilated storage sheds in summer, and temperatures alternating between hot and cold, may cause moisture migration from the core and weakening of the rock due to differential thermal expansion and contraction between grains. Such temperature extremes should therefore be avoided, particularly for weak sedimentary rock types.

5.3.4 A weak rock core may be broken or further weakened by careless handling, such as dropping a core box, or by mechanical vibration and shock during transportation. Breaking of the core reduces sample lengths available for testing. Weakening caused by such mechanical stressing may lower measured strength parameters and may affect other properties.

5.3.5 The required preservation time may vary from as short as three months to several years, and sometimes core may need to be stored indefinitely. A core taken simply to identify the bedrock lithology beneath a small structure may be needed for a few months only. For large and critical structures, it may be necessary to retain the core for many years as re-examination

and testing may be required at some later time for additional geologic study or re-evaluation of property data. Some states have regulations governing the disposition and storage of core obtained within the state.


5.4 Fig. 1 is a flow chart that shows the various core handling, use, and storage activities and the corresponding section numbers in these practices. Note that four care or protection levels are defined in Section 3 to account for the great variety of rock sensitivities and core uses encountered in practice.

5.5 The person assigned curatorial management responsibility should study the flow chart in Fig. 1 as it relates to the designated Sections 6-11 in these practices. Note in particular, that a selection of the required protection must be made in 7.5, where four levels of protection are specified, namely routine care, special care, critical care, and soil-like care.

5.6 Special attention is also directed to records requirements in Section 12, that document the history of the core handling, preservation, and storage.

6. Apparatus

- 6.1 Camera, for taking photographs of cores for logging.
- 6.2 Controlled Humidity Room.
- 6.3 Core Boxes—See 7.6.1.
- 6.4 Vinylidene Chloride Plastic Film, Aluminum Foil, Plastic Microcrystalline Wax, for sealing in moisture content of cores.
- 6.5 Polyethylene Layflat Plastic Tubing.

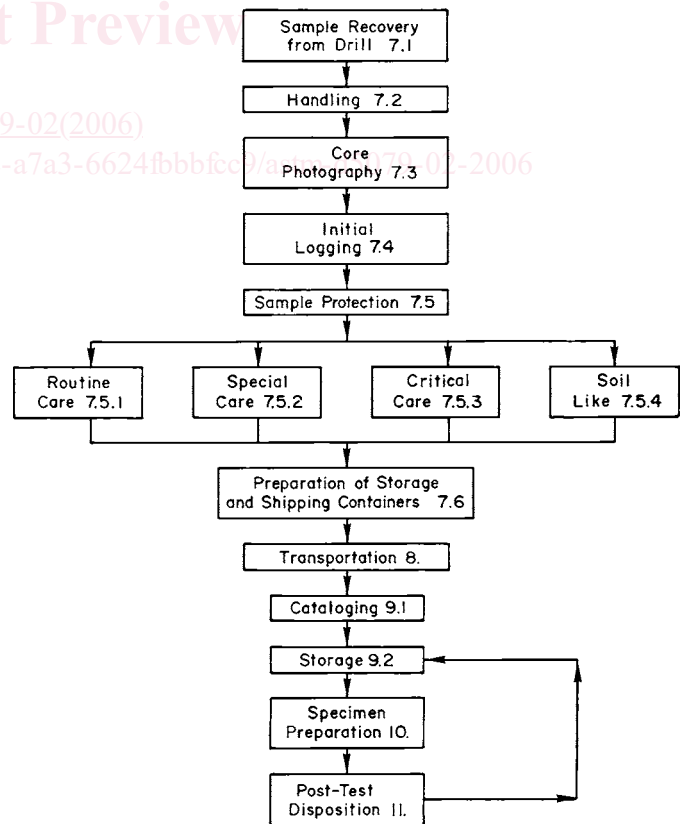

NOTE 1—Numbers refer to corresponding sections of this practice.
FIG. 1 Flow Chart for Core Handling, Use, and Storage Activities