
Naprave kratkega dosegaja (SRD), ki delujejo v frekvenčnem območju od 25 MHz do 1000 MHz - 1. del: Tehnične karakteristike in merilne metode

Short Range Devices (SRD) operating in the frequency range 25 MHz to 1 000 MHz - Part 1: Technical characteristics and methods of measurement

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **ETSI EN 300 220-1 V3.1.1 (2017-02)**

SIST EN 300 220-1 V3.1.1:2017
<https://standards.iteh.ai/catalog/standards/sist/c24c1673-55c1-4044-8a5f-74ad2a561d0f/sist-en-300-220-1-v3-1-1-2017>

ICS:

33.060.20	Sprejemna in oddajna oprema	Receiving and transmitting equipment
33.100.01	Elektromagnetna združljivost na splošno	Electromagnetic compatibility in general

SIST EN 300 220-1 V3.1.1:2017

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 220-1 V3.1.1:2017

<https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-74ad2a561d0f/sist-en-300-220-1-v3-1-1-2017>

ETSI EN 300 220-1 V3.1.1 (2017-02)



**Short Range Devices (SRD) operating
in the frequency range 25 MHz to 1 000 MHz;
Part 1: Technical characteristics and
methods of measurement**

<https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-74ad2a561d0f/sist-en-300-220-1-v3-1-1-2017>

Reference

REN/ERM-TG28-533

Keywords

radio, SRD, testing

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 220-1 V3.1.1:2017

<https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-74ad2a561d74/sist-en-300-220-1-v3-1-1-2017>

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2017.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	8
Foreword.....	8
Modal verbs terminology.....	8
Introduction	9
1 Scope	10
2 References	10
2.1 Normative references	10
2.2 Informative references.....	10
3 Definitions, symbols and abbreviations	11
3.1 Definitions	11
3.2 Symbols.....	14
3.3 Abbreviations	14
4 Conformance specification.....	15
4.1 General performance criterion.....	15
4.2 Equipment conformance requirements specification.....	16
4.2.1 General.....	16
4.2.2 Transmitter shut-off facility.....	16
4.2.3 Receiver mute or squelch or battery saving circuit.....	16
4.2.4 Auxiliary test equipment.....	16
4.2.5 Receiver Category.....	16
4.2.5.1 Description	16
4.3 General conditions for testing	17
4.3.1 Test signals	17
4.3.1.1 Test signals for data	17
4.3.2 Test power source.....	18
4.3.2.0 General	18
4.3.2.1 External test power source	18
4.3.2.2 Internal test power source	18
4.3.3 Normal test conditions	19
4.3.3.1 Normal temperature and humidity	19
4.3.3.2 Normal test power source.....	19
4.3.3.2.1 Mains voltage	19
4.3.3.2.2 Regulated lead-acid battery power sources	19
4.3.3.2.3 Other power sources	19
4.3.4 Extreme test conditions.....	19
4.3.4.0 General requirement.....	19
4.3.4.1 Extreme temperatures.....	19
4.3.4.1.0 Procedure for tests at extreme temperatures	19
4.3.4.1.1 General requirements.....	19
4.3.4.1.2 Extreme temperature ranges	20
4.3.4.2 Extreme test source voltages	20
4.3.4.2.1 Mains voltage	20
4.3.4.2.2 Regulated lead-acid battery power sources	20
4.3.4.2.3 Power sources using other types of batteries	21
4.3.4.2.4 Other power sources	21
4.3.5 Testing of frequency agile or hopping equipment	21
4.3.6 Testing of equipment with adaptive power levels.....	21
4.3.7 Artificial antenna	21
4.3.8 Equipment without an external RF connector.....	21
4.3.8.0 General conditions	21
4.3.8.1 Equipment with an internal connector.....	22
4.3.8.2 Equipment with a temporary antenna connector.....	22
4.3.8.3 Use of a Test Fixture	22
4.3.9 Conducted and radiated measurements.....	22

4.3.10	Measuring receiver	23
4.3.10.0	Description	23
4.3.10.1	Reference bandwidth.....	23
4.4	Interpretation of the measurement results	24
5	Parameters and tests	25
5.1	Operating frequency	25
5.1.1	Description.....	25
5.1.2	Conformance.....	25
5.2	Effective Radiated Power	25
5.2.1	Description.....	25
5.2.2	Conformance.....	26
5.2.2.1	Effective Radiated Power (conducted measurement).....	26
5.2.2.1.0	General	26
5.2.2.1.1	Test conditions	26
5.2.2.1.2	Measurement procedure	26
5.2.2.2	Effective radiated power (radiated measurement).....	26
5.2.2.2.0	General	26
5.2.2.2.1	Test conditions	26
5.2.2.2.2	Measurement procedure	27
5.3	Maximum Effective Radiated Power spectral density.....	27
5.3.1	Description.....	27
5.3.2	Conformance.....	27
5.3.2.1	Test conditions	27
5.3.2.1.1	General requirements.....	27
5.3.2.1.2	Measurement procedure	28
5.4	Duty Cycle.....	28
5.4.1	Description.....	28
5.4.2	Conformance.....	29
5.5	Duty Cycle Template.....	29
5.5.1	Description.....	29
5.5.2	Conformance.....	29
5.5.2.1	Test conditions	29
5.5.2.2	Measurement procedure	30
5.6	Occupied Bandwidth	31
5.6.1	Description.....	31
5.6.2	Reference limits	31
5.6.3	Conformance.....	31
5.6.3.1	Test conditions	31
5.6.3.2	Radiated measurement	31
5.6.3.3	Conducted measurement	31
5.6.3.4	Measurement procedure	31
5.6.3.5	Recording	32
5.7	Frequency error	32
5.7.1	Description.....	32
5.7.2	Conformance.....	32
5.7.2.1	Test conditions	32
5.7.2.2	Conducted measurement	33
5.7.2.3	Radiated measurement	33
5.7.2.4	Measurement procedure	33
5.7.2.5	Recording	33
5.8	Tx Out Of Band Emissions.....	33
5.8.1	Description.....	33
5.8.2	Reference limits	34
5.8.3	Conformance.....	35
5.8.3.1	Test conditions	35
5.8.3.2	Radiated measurement	35
5.8.3.3	Conducted measurement	35
5.8.3.4	Measurement procedure	36
5.9	Unwanted emissions in the spurious domain.....	37
5.9.1	Description.....	37
5.9.1.1	Unwanted emissions for a TX mode	37

5.9.1.2	Unwanted emissions for all other modes	38
5.9.2	Reference limits	38
5.9.3	Conformance.....	38
5.9.3.1	Test conditions for TX mode	38
5.9.3.2	Test conditions for RX and all other modes.....	39
5.9.3.3	Measurement procedure	39
5.9.3.3.1	Conducted measurement.....	39
5.9.3.3.2	Radiated measurement.....	39
5.10	Transient power.....	40
5.10.1	Description.....	40
5.10.2	Reference limits	40
5.10.3	Conformance.....	40
5.10.3.1	Test conditions	40
5.10.3.2	Measurement procedure	40
5.11	Adjacent Channel Power	41
5.11.1	Description.....	41
5.11.2	Reference limits	41
5.11.3	Conformance.....	42
5.11.3.1	Test conditions	42
5.11.3.2	Radiated measurement	42
5.11.3.3	Conducted measurement	42
5.11.3.4	Measurement procedure	42
5.12	TX behaviour under Low Voltage Conditions	43
5.12.1	Description.....	43
5.12.2	Reference limits	43
5.12.3	Conformance.....	43
5.12.3.1	Test conditions	43
5.12.3.2	Measurement procedure	44
5.13	Adaptive Power Control.....	44
5.13.1	Description.....	44
5.13.2	Reference limits	44
5.13.3	Conformance.....	44
5.13.3.1	Test conditions.....	44
5.13.3.2	Radiated measurement.....	45
5.13.3.3	Conducted measurement	45
5.13.3.4	Measurement procedure	45
5.14	RX sensitivity level	46
5.14.1	Description.....	46
5.14.2	Reference limits	46
5.14.3	Conformance.....	46
5.14.3.1	Test conditions	46
5.14.3.2	Radiated measurement	46
5.14.3.3	Conducted measurement	47
5.14.3.4	Measurement procedure	47
5.15	Adjacent channel selectivity.....	47
5.15.1	Description.....	47
5.15.2	Reference limit for receiver category 1.....	48
5.15.3	Conformance.....	48
5.15.3.1	Test conditions	48
5.15.3.2	Radiated measurement	48
5.15.3.3	Conducted measurement	48
5.15.3.4	Measurement procedure	48
5.16	Receiver saturation at Adjacent Channel.....	49
5.16.1	Description.....	49
5.16.2	Reference limit for receiver category 1.....	49
5.16.3	Conformance.....	49
5.16.3.1	Test Conditions	49
5.16.3.2	Radiated measurement	50
5.16.3.3	Conducted measurement	50
5.16.3.4	Measurement procedure	50
5.17	Spurious response rejection.....	50
5.17.1	Description.....	50

5.17.2	Reference limit for receiver category 1.....	51
5.17.3	Conformance.....	51
5.17.3.1	Test Conditions	51
5.17.3.2	Radiated measurement	51
5.17.3.3	Conducted measurement	51
5.17.3.4	Measurement procedure	51
5.18	Blocking	52
5.18.1	Description.....	52
5.18.2	Reference limits for receiver category 3	52
5.18.3	Reference limits for receiver category 2	52
5.18.4	Reference limits for receiver category 1.5	53
5.18.5	Reference limits for receiver category 1	53
5.18.6	Conformance.....	53
5.18.6.1	Test conditions	53
5.18.6.2	Radiated measurement	53
5.18.6.3	Conducted measurement	54
5.18.6.4	Measurement procedure	54
5.19	Behaviour at high wanted signal level.....	55
5.19.1	Description.....	55
5.19.2	Reference limits for receiver category 1	55
5.19.3	Conformance.....	55
5.20	Void.....	55
5.21	Polite spectrum access.....	55
5.21.1	Description.....	55
5.21.2	Clear Channel Assessment threshold.....	56
5.21.2.1	Description.....	56
5.21.2.2	Reference CCA limits.....	56
5.21.2.3	Conformance.....	56
5.21.2.3.1	Test conditions	56
5.21.2.3.2	Radiated measurement.....	56
5.21.2.3.3	Conducted measurement.....	57
5.21.2.3.4	Measurement procedure.....	57
5.21.3	Polite spectrum access timing parameters.....	58
5.21.3.1	Reference limits for polite spectrum access timing parameters.....	58
5.21.3.2	Conformance.....	58
5.21.4	Adaptive Frequency Agility.....	59
5.21.4.1	Description.....	59
5.21.4.2	Conformance.....	59
5.22	Bi-Directional Operation Verification.....	59
5.22.1	Description.....	59
5.22.2	Conformance.....	59
Annex A (normative): Technical performance of the test equipment.....		60
A.1	Spectrum analyser	60
A.2	Signal Generators and Signal Sources.....	60
Annex B (normative): Test Fixture		61
B.0	Description of test-fixture	61
B.1	Mode of use.....	62
Annex C (normative): Test sites and arrangements for radiated measurement		63
C.0	Introduction	63
C.1	Radiation test sites.....	63
C.1.1	Open Area Test Site (OATS)	63
C.1.2	Semi Anechoic Room.....	64
C.1.3	Fully Anechoic Room (FAR)	65
C.1.4	Measurement Distance	67
C.2	Antennas.....	67

C.2.0	General	67
C.2.1	Measurement antenna.....	67
C.2.2	Substitution antenna	67
C.3	Guidance on the use of radiation test sites	68
C.3.0	General	68
C.3.1	Power supplies for the battery powered EUT.....	68
C.3.2	Site preparation	68
C.4	Coupling of signals.....	69
C.4.1	General	69
C.4.2	Data Signals.....	69
C.5	Measurement procedures for radiated measurement	69
C.5.0	General	69
C.5.1	Radiated measurements in an OATS or SAR.....	69
C.5.2	Radiated measurements in a FAR	70
C.5.3	Substitution measurement	70
C.5.4	Radiated measurement for receivers.....	71
C.6	Guidance for testing technical requirements	71
C.6.0	General	71
C.6.1	Radio test suites and corresponding test sites.....	71
Annex D (informative):	Bibliography	72
Annex E (informative):	Change History	73
History		74

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 220-1 V3.1.1:2017](https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-74ad2a561d0f/sist-en-300-220-1-v3-1-1-2017)

<https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-74ad2a561d0f/sist-en-300-220-1-v3-1-1-2017>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document is part 1 of a multi-part deliverable covering Short Range Devices (SRD), as identified below:

- Part 1: "Technical characteristics and methods of measurement";**
- Part 2: "Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU for non specific radio equipment";
- Part 3-1: "Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU; Low duty cycle high reliability equipment, social alarms equipment operating on designated frequencies (869,200 MHz to 869,250 MHz)";
- Part 3-2: "Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU; Wireless alarms operating in designated LDC/HR frequency bands 868,60 MHz to 868,70 MHz, 869,25 MHz to 869,40 MHz, 869,65 MHz to 869,70 MHz";
- Part 4: "Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU; Metering devices operating in designated band 169,400 MHz to 169,475 MHz".

Other parts may be added in the future, as necessary, using the present document as a basis for Technical characteristics and methods of measurement.

National transposition dates	
Date of adoption of this EN:	27 January 2017
Date of latest announcement of this EN (doa):	30 April 2017
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 October 2017
Date of withdrawal of any conflicting National Standard (dow):	31 October 2017

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Introduction

The present document includes improvements to the previous version of the standard that take advantage of technical developments within the SRD industry. It also serves the purpose of providing the requirements and associated measurement methods to improve the intra- SRD co-existence and promote efficient spectrum use.

The attention of the reader is brought on the fact that the present document includes "reference limits" which may be called by harmonised standards but which can also be different if requested for a specific application environment.

The present document is structured as follows:

Clause 2 provides references.

Clause 3 provides definitions of terms and abbreviations used.

Clause 4 provides conformance specifications.

Clause 5 specifies the list of parameters, reference limits and tests.

Annex A (normative): Technical performance of the test equipment.

Annex B (normative): Test Fixture, contains specifications for the test fixture.

Annex C (normative): Test sites and arrangements for radiated measurement, contains specifications concerning radiated measurements.

Annex D (informative): Bibliography.

Annex E (informative): Change History.

STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 220-1 V3.1.1:2017](https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-74ad2a561d0f/sist-en-300-220-1-v3-1-1-2017)

<https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-74ad2a561d0f/sist-en-300-220-1-v3-1-1-2017>

1 Scope

The present document specifies technical characteristics and test methods to be used in the conformance assessment of Short Range Device equipment in the frequency range 25 MHz to 1 GHz.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] Recommendation ITU-T O.153 (10/92): "Basic parameters for the measurement of error performance at bit rates below the primary rate".
- [2] ETSI TS 103 060 (V1.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short Range Devices (SRD): Method for a harmonized definition of Duty Cycle Template (DCT) transmission as a passive mitigation technique used by short range devices and related conformance test methods".

<https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-242201010101/sist-en-300-220-1-v3-1-1-2017>

<https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-242201010101/sist-en-300-220-1-v3-1-1-2017>

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] CISPR 16 (2006) (parts 1-1, 1-4 and 1-5): "Specification for radio disturbance and immunity measuring apparatus and methods; Part 1: Radio disturbance and immunity measuring apparatus".
- [i.2] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.
- [i.3] ETSI TR 100 028 (all parts) (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [i.4] ETSI TR 102 273-2 (V1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties; Part 2: Anechoic chamber".
- [i.5] ETSI TR 102 273-3 (V1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties; Part 3: Anechoic chamber with a ground plane".

- [i.6] ETSI TR 102 273-4 (V1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties; Part 4: Open area test site".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

acknowledgement: brief communication (burst) from the responder to the message initiator confirming successful reception of the message

adaptive frequency agility: capability of an equipment to dynamically change the temporary operational channel within its available frequencies for proper operation

NOTE 1: For the purpose of the present document, non-overlapping channels are used.

NOTE 2: Dynamic change of a channel can be triggered by sensing an occupied channel (e.g. CCA), etc.

adjacent channel: frequency band, of width operating channel width (OCW), on either side of the operating channel

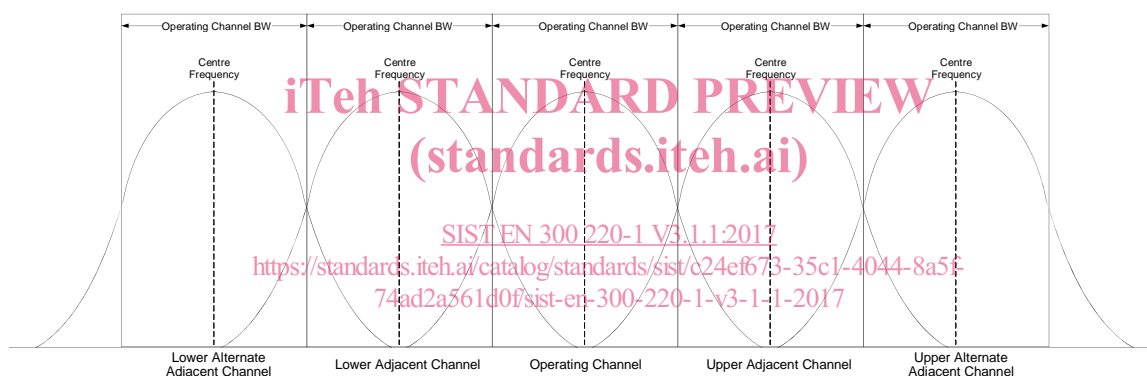


Figure 1: Adjacent Channels definition

alarm device: equipment devices that use radio communication to indicate an alert or danger condition to a distant location

alternate adjacent channels: those two channels offset from the nominal operating channel by double the operating channel width

ancillary equipment: equipment (apparatus), used in connection with a receiver or transmitter

NOTE: It is considered as an ancillary equipment (apparatus) if:

- the equipment is intended for use in conjunction with a receiver or transmitter to provide additional operational and/or control features to the radio equipment, (e.g. to extend control to another position or location); and
- the equipment cannot be used on a stand alone basis to provide user functions independently of a receiver or transmitter; and
- the receiver or transmitter, to which it is connected, is capable of providing some intended operation such as transmitting and/or receiving without the ancillary equipment (i.e. it is not a sub-unit of the main equipment essential to the main equipment basic functions).

channel adaptivity: ability to adapt device behaviour without change of channel

channel spacing: distance, in hertz, between adjacent nominal centre frequencies

centre frequency: nominal centre frequency of a transmission


clear channel assessment: procedure of sensing the operating channel to determine whether or not it is occupied by a transmission

conducted measurements: measurements which are made using a direct 50 Ω connection to the equipment under test

continuous transmission: transmission without interruption for the period of the test

cumulative on time (T_{on_cum}): sum of T_{on} , within T_{obs}

NOTE: See Figure 2.

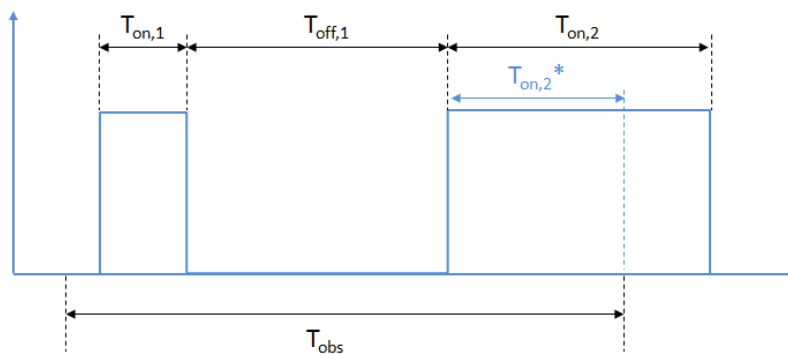

In this example: $T_{on_cum} = T_{on,1} + T_{on,2}^*$

Figure 2: Illustration for Cumulative On-Time
(standards.iteh.ai)

dead time: time between the end of the CCA interval and the start of the transmission

dedicated antenna: removable antenna supplied and tested with the radio equipment, designed as an indispensable part of the equipment

<https://standards.iteh.ai/catalog/standards/sist/c24ef673-35c1-4044-8a5f-74ad2a561d0f/sist-en-300-220-1-v3-1-1-2017>

deferral time: random time a transmission is deferred before a retry to CCA when a channel was not free

disregard time (T_{Dis}): manufacturer declared interval below which two separate radio emissions in an Operating Channel are considered a single continuous transmitted burst

NOTE: See Figure 4.

Duty Cycle (DC): ratio expressed as a percentage, of the cumulative duration of transmissions T_{on_cum} within an observation interval T_{obs} . $DC = \left(\frac{T_{on_cum}}{T_{obs}} \right)_{F_{obs}}$ on an observation bandwidth F_{obs}

Duty Cycle Template (DCT): duty cycle respecting the constraint of T_{on_max} and T_{off_min} values for transmissions

frequency adaptivity: capability of a device to avoid using permitted operating channels that it has determined are temporarily or permanently unsuitable for its use

frequency agility: capability of a device to dynamically change operating channel

Frequency Hopping Spread Spectrum (FHSS): technique in which the transmitter signal occupies a number of frequencies in time, each for some period of time, referred to as the dwell time

NOTE: Transmitter and receiver follow the same frequency hop pattern. The frequency range is determined by the lowest and highest hop positions and the bandwidth per hop.

integral antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment

listen before transmit: mechanism by which an equipment applies Clear Channel Assessment (CCA) before transmission (also known as Listen Before Talk)

maintenance: process of external intervention intended to keep equipment operational

NOTE: Maintenance may be scheduled or in response to failure. Automatic processes by the equipment itself are not considered maintenance.

manufacturer: As given in article 2 of Directive 2014/53/EU [i.2].

maximum transmission duration ($T_{\text{On-Max}}$): longest permitted transmission T_{on}

Message Initiator (MI): device which generates a message to be transferred to another device, such as a Message Responder

Message Responder (MR): device which receives a message from another device, such as a Message Initiator

minimum inter-transmission interval ($T_{\text{Off-Min}}$): minimum interval in a channel between two transmissions by the same device

model control: devices used to control models (e.g. miniature representations of vehicles) in the air, on land or over or under the water surface

non-specific use: any type of application

observation bandwidth (F_{obs}): bandwidth in which the energy of an equipment is considered for the purposes of assessing transmission timings

observation period (T_{obs}): reference interval of time

Occupied BandWidth (OBW): width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to 0.5 % of the total mean power of a given emission

NOTE: See Figure 3.

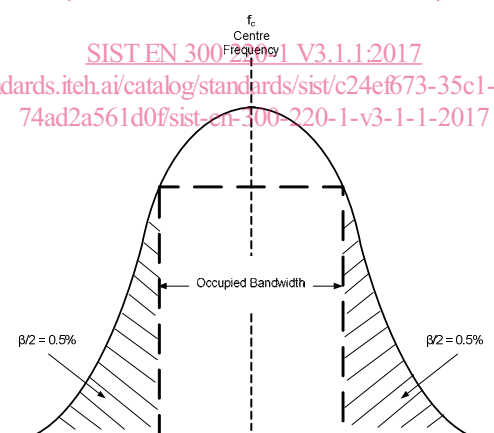


Figure 3: Signal occupied bandwidth

off time (T_{off}): time duration between two successive transmissions in the same operating channel

NOTE: See Figure 4.

on time (T_{on}): duration on a Transmission

NOTE: See Figure 4.

Operating Channel (OC): frequency range in which the transmission from the equipment occurs; defined by two frequency edges values: F_{low} and F_{high} declared by the manufacturer

Operating Channel Width (OCW): bandwidth between the two frequencies F_{low} and F_{high} declared as operating channel

operating frequency: nominal centre frequency of transmission