



SLOVENSKI STANDARD
SIST EN 12543-3:2000

01-oktober-2000

BYdcfi ý]hj Ybc`dfYg_i ýUb^Y!'NbU]bcghj[cf]ý bYdcj fý]bYj `]bXi glf]tg_`
fYbh Ybg_` g]ghYa ` nUBYdcfi ý]hj Ybc`dfYg_i ýUb^Y!' "XY. AYtcXUg`_Ua Yfc`n
fUndcf_ca

Non-destructive testing - Characteristics of focal spots in industrial X-ray systems for use in non-destructive testing - Part 3: Slit camera radiographic method

Zerstörungsfreie Prüfung - Charakterisierung von Brennflecken in Industrie-Röntgenanlagen für die zerstörungsfreie Prüfung - Teil 3: Radiographisches Schlitzkamera-Verfahren

Essais non destructifs - Caractéristiques des foyers émissifs des tubes radiogenes industriels utilisés dans les essais non destructifs - Partie 3: Méthode radiographique par chambre a fente

Ta slovenski standard je istoveten z: EN 12543-3:1999

ICS:

19.100 Neporušitveno preskušanje Non-destructive testing

SIST EN 12543-3:2000 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 12543-3:2000

<https://standards.iteh.ai/catalog/standards/sist/3166e13b-d8c5-4c28-a545-31d3e224374b/sist-en-12543-3-2000>

EUROPEAN STANDARD

EN 12543-3

NORME EUROPÉENNE

EUROPÄISCHE NORM

September 1999

ICS 19.100

English version

Non-destructive testing - Characteristics of focal spots in
industrial X-ray systems for use in non-destructive testing - Part
3: Slit camera radiographic method

Essais non destructifs - Caractéristiques des foyers
émisifs des tubes radiogènes industriels utilisés dans les
essais non destructifs - Partie 3: Méthode radiographique
par chambre à fente

Zerstörungsfreie Prüfung - Charakterisierung von
Brennflecken in Industrie-Röntgenanlagen für die
zerstörungsfreie Prüfung - Teil 3: Radiographisches
Schlitzkamera-Verfahren

This European Standard was approved by CEN on 16 August 1999.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

<https://standards.iteh.ai/catalog/standards/sist/3166e13b-d8c5-4c28-a545-31d3e224374b/sist-en-12543-3-2000>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Contents

	Page
Foreword	3
Introduction	4
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 Test equipment	4
5 Measurement and determination of the focal spot size	8
Annex A (informative) Preferred values of d for the characterization of X-ray tube types	9

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 12543-3:2000

<https://standards.iteh.ai/catalog/standards/sist/3166e13b-d8c5-4c28-a545-31d3e224374b/sist-en-12543-3-2000>



Foreword

This European Standard has been prepared by Technical Committee CEN/TC 138 "Non-destructive testing", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2000, and conflicting national standards shall be withdrawn at the latest by March 2000.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

In the framework of its scope, Technical Committee CEN/TC 138 entrusted CEN/TC 138/WG 1 "Ionizing Radiation" with preparing the following standard:

EN 12543-3, *Non-destructive testing - Characteristics of focal spots in industrial X-ray systems for use in non-destructive testing - Part 3: Slit camera radiographic method.*

EN 12543-3 is a part of series of European Standards with the same number; the other parts are the following:

EN 12543-1, *Non-destructive testing - Characteristics of focal spots in industrial X-ray systems for use in non-destructive testing - Part 1: Scanning method.*

EN 12543-2, *Non-destructive testing - Characteristics of focal spots in industrial X-ray systems for use in non-destructive testing - Part 2: Pinhole camera radiographic method.*

EN 12543-4, *Non-destructive testing - Characteristics of focal spots in industrial X-ray systems for use in non-destructive testing - Part 4: Edge method.*

EN 12543-5, *Non-destructive testing - Characteristics of focal spots in industrial X-ray systems for use in non-destructive testing - Part 5: Measurement of the effective focal spot size of mini and micro focus X-ray tubes.*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 12543-3:2000

<https://standards.iteh.ai/catalog/standards/sist/3166e13b-d8c5-4c28-a545-31d3e224374b/sist-en-12543-3-2000>

Introduction

In order to cover the different requirements for focal spot size measurement, five different methods are described in EN 12543-1 to EN 12543-5.

The scanning method (EN 12543-1) is dedicated to those applications where quantitative values for the intensity distribution and spot size are needed, i. e. calibration and image processing purposes.

The radiographic methods (EN 12543-2 and EN 12543-3) describe the traditional techniques and are dedicated for certification purposes and for field applications up to 200 kV.

Where no pinhole or slit cameras are available in the field, the edge method (EN 12543-4) may be applied. It represents a very simple method for field application.

In order to cover also the micro focus systems, a specific method is presented in EN 12543-5.

1 Scope

This European Standard specifies a method for the measurement of focal spot dimensions above 0,1 mm of X-ray systems up to and including 500 kV tube voltage by means of the slit camera radiographic method. The voltage applied for this measurement is restricted to 200 kV.

The image quality and the resolution of X-ray images depend highly on the characteristics of the focal spot, in particular the size and the two-dimensional intensity distribution in the object plane.

For the characterization of commercial X-ray tube types (i.e. for advertising or trade) the specific maximum values of annex A should be preferred.

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 584-1, *Non-destructive testing – Industrial radiographic film – Part 1: Classification of film systems for industrial radiography.*

EN 12543-1, *Non-destructive testing – Characteristics of focal spots in industrial X-ray systems for use in non-destructive - testing – Part 1: Scanning method.*

3 Terms and definitions

For the purposes of this standard, the following definition applies:

Focal spot: the X-ray emitting area on the anode of the X-ray tube as seen from the measuring device [EN 12543-1].


4 Test equipment

4.1 The Slit Camera

The slit camera shall consist of a block with a slit with the dimensions given in figure 1.

It shall be made from tungsten or a similar absorbant material.

Dimensions in millimetre

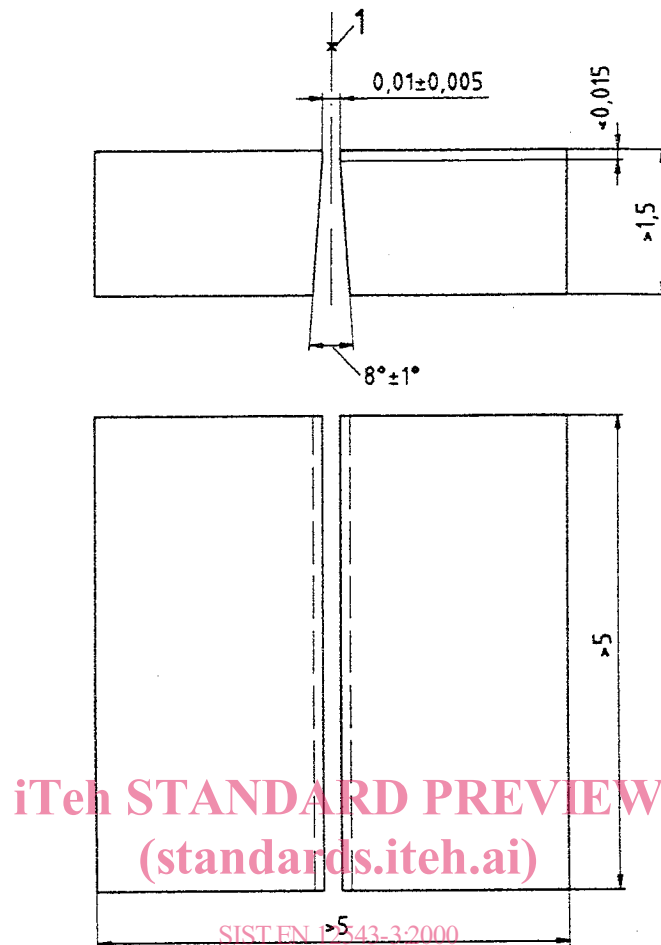


Key
1 symmetry axis

<https://standards.iteh.ai/catalog/standards/sist/3166e13b-d8c5-4c28-a545-31d3e224374b/sist-en-12543-3-2000>

Figure 1 – Essential dimensions of the block and slit

4.2 Alignment and position of the slit camera

The angle between the beam direction and the axis of the slit symmetry (see figure 2) shall be smaller than 3° . When deviating from figure 2, the direction of the beam shall be indicated.

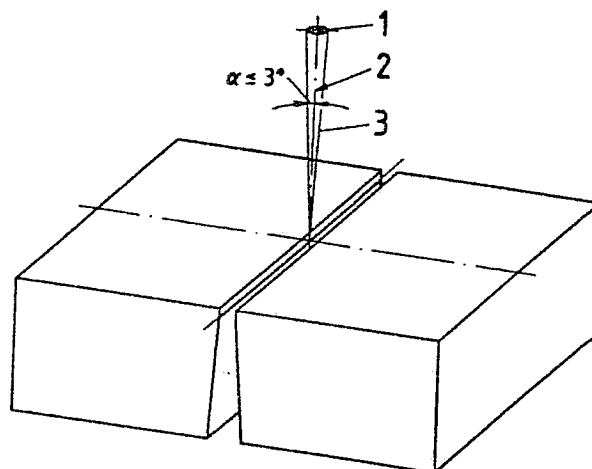**Key**

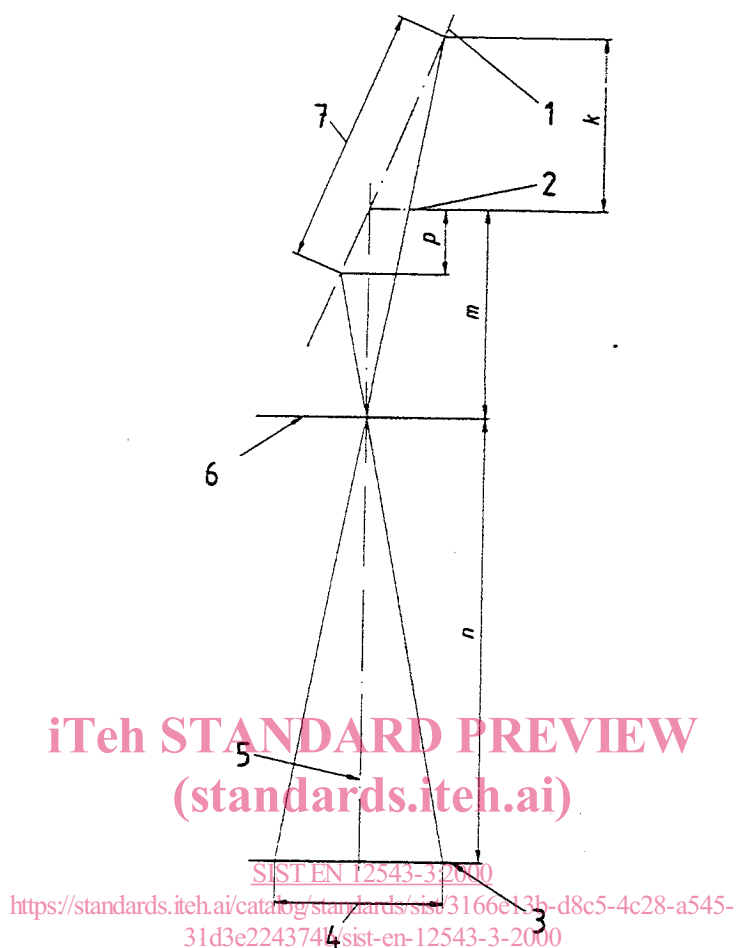
- 1 focal spot
- 2 beam direction
- 3 maximum deviation of the slit symmetry axis

Figure 2 – Alignment of the slit camera

The incident face of the slit shall be placed at a distance m from the focal spot so that the variation of the magnification over the length of the actual focal spot does not exceed $\pm 5\%$ in the beam direction, see figure 3, according to following formulae:

$$n/m = E \quad n/(m+k) \geq 0,95 E \quad n/(m-p) \leq 1,05 E$$

where E is the magnification. n , m , k and p are given in figure 3.

**Key**

- 1 plane of anode
- 2 reference plane
- 3 radiographic film
- 4 length of the focal spot
- 5 beam direction
- 6 incident face of the slit block
- 7 length of the actual focal spot

Figure 3 – Beam direction, dimensions and planes

For the production of a pair of focal spot slit radiographs the slit block shall be orientated so that the length of the slit is normal within $\pm 5^\circ$ to each of two directions of evaluation.

For measurements over the length of the focal spot, the direction of evaluation shall be parallel to the longitudinal axis of the X-ray tube assembly. For measurements over the width of the focal spot, the direction of evaluation shall be normal to the direction of the length evaluation.