

**SLOVENSKI STANDARD
SIST ETS 300 607-1 E4:2005
01-februar-2005**

8][JhUb]WW] b]hYY_ca i b]_UWg]g]ghYa f]hU&L! GdY]_UWUg_`UXbcgH]
a cV]bYdcgH]YfA G!%XY. GdY]_UWUg_`UXbcgH]f, GA %%%\$!%L

Digital cellular telecommunications system (Phase 2) (GSM); Mobile Station (MS) conformance specification; Part 1: Conformance specification (GSM 11.10-1)

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

Ta slovenski standard je istoveten z: [SIST ETS 300 607-1 E4:2005
https://standards.iteh.ai/catalog/standards/sist/50b/95a3-723a-4773-a890-4ae3a271b755/sist-ets-300-607-1-e4-2005](https://standards.iteh.ai/catalog/standards/sist/50b/95a3-723a-4773-a890-4ae3a271b755/sist-ets-300-607-1-e4-2005)

ICS:


| | | |
|-----------|---|--|
| 33.070.50 | Globalni sistem za mobilno telekomunikacijo (GSM) | Global System for Mobile Communication (GSM) |
|-----------|---|--|

SIST ETS 300 607-1 E4:2005 **en**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST ETS 300 607-1 E4:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/50b793a3-723a-4773-a890-4ae3a271b755/sist-ets-300-607-1-e4-2005>

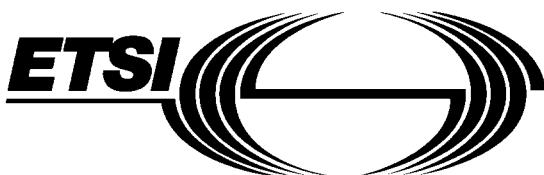

EUROPEAN TELECOMMUNICATION STANDARD

ETS 300 607-1

May 1997

Fourth Edition

Source: ETSI TC-SMG

Reference: RE/SMG-07111OPR2-1

ICS: 33.020

Key words: Digital cellular telecommunications system, Global System for Mobile Communication (GSM)



**Digital cellular telecommunications system (Phase 2);
Mobile Station (MS) conformance specification;
Part 1: Conformance specification
(GSM 11.10-1)**

SIST ETS 300 607-1 E4:2005
Mobile Station (MS) conformance specification; Part 1: Conformance specification
4ae3a271b755/sist-ets-300-607-1-e4-2005

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.

Page 2

ETS 300 607-1 (GSM 11.10-1 version 4.17.1): May 1997

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 607-1 E4:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/50b793a3-723a-4773-a890-4ae3a271b755/sist-ets-300-607-1-e4-2005>

Contents

| | |
|--|----|
| Foreword | 29 |
| 1 Scope | 31 |
| 2 Normative references..... | 31 |
| 3 Definitions, conventions, and applicability..... | 37 |
| 3.1 Mobile station definition and configurations | 37 |
| 3.2 Applicability | 38 |
| 3.2.1 Applicability of this specification | 38 |
| 3.2.2 Applicability of the individual tests | 38 |
| 3.2.3 Applicability to terminal equipment..... | 58 |
| 3.3 Definitions | 58 |
| 3.4 Conventions for mathematical notations..... | 59 |
| 3.4.1 Mathematical signs..... | 59 |
| 3.4.2 Powers to the base 10..... | 59 |
| 3.5 Conventions on electrical terms..... | 59 |
| 3.5.1 Radio Frequency (RF) input signal level | 59 |
| 3.5.2 Reference sensitivity level | 59 |
| 3.5.3 Power level of fading signal..... | 60 |
| 3.6 Terms on test conditions..... | 60 |
| 3.6.1 Radio test conditions..... | 60 |
| iTeh STANDARD PREVIEW | |
| 4 Test Equipment | 60 |
| 4.1 Terms used to describe test equipment in this ETS | 60 |
| 4.2 Functional requirements of test equipment..... | 61 |
| 5 Testing methodology in general (layers 1, 2, and 3) https://standards.iteh.ai/catalog/standards/jst/50b793a3-723a-4773-a890-1be3171b252/sist-ets-300-607-1-e4-2005 | 61 |
| 5.1 Testing of optional functions and procedures | 61 |
| 5.2 Test interfaces and facilities | 61 |
| 5.3 Different protocol layers | 62 |
| 5.4 Information to be provided by the apparatus supplier..... | 62 |
| 5.5 Definitions of transmit and receive times | 62 |
| 6 Reference test methods | 62 |
| 6.1 General | 62 |
| 6.2 Choice of frequencies in the frequency hopping mode..... | 62 |
| 6.3 "Ideal" radio conditions | 63 |
| 6.4 Standard test signals | 63 |
| 6.5 Power (control) levels | 63 |
| 7 Implicit testing..... | 63 |
| 8 Measurement uncertainty..... | 63 |
| 9 Format of tests | 64 |
| 10 Generic call set up procedures | 64 |
| 10.1 Generic call set-up procedure for mobile terminating speech calls | 64 |
| 10.1.1 Initial conditions | 64 |
| 10.1.2 Definition of system information messages..... | 65 |
| 10.1.3 Procedure..... | 67 |
| 10.1.4 Specific message contents | 68 |
| 10.2 Generic call set-up procedure for mobile originating speech calls | 69 |
| 10.2.1 Initial conditions | 69 |
| 10.2.2 Definition of system information messages..... | 69 |

| | | |
|-----------|---|-----|
| 10.2.3 | Procedure | 70 |
| 10.2.4 | Specific message contents..... | 70 |
| 10.3 | Generic call set-up procedure for mobile terminating data calls | 72 |
| 10.3.1 | Initial conditions | 72 |
| 10.3.2 | Definition of system information messages..... | 72 |
| 10.3.3 | Procedure | 73 |
| 10.3.4 | Specific message contents..... | 73 |
| 10.4 | Generic call set-up procedure for mobile originating data calls | 75 |
| 10.4.1 | Initial conditions | 75 |
| 10.4.2 | Definition of system information messages..... | 75 |
| 10.4.3 | Procedure | 76 |
| | Specific message contents..... | 76 |
| 11 | General tests | 79 |
| 11.1 | Verification of support and non-support of services (multiple numbering scheme or ISDN)..... | 79 |
| 11.1.1 | Mobile Terminated (MT) calls | 79 |
| 11.1.2 | Mobile Originated (MO) calls | 80 |
| 11.2 | Verification of support of the single numbering scheme | 81 |
| 11.3 | Verification of non-support of services (Advice of Charge Charging (AoCC)) | 82 |
| 11.4 | Verification of non-support of services (call hold) | 83 |
| 11.5 | Verification of non-support of services (multiparty) | 84 |
| 11.6 | Verification of non-support of feature (Fixed Dialling Number (FDN)) | 85 |
| 11.7 | IMEI Security | 86 |
| 11.8 | Coding of the Bearer Capability information element..... | 87 |
| 11.8.1 | Network to MS Direction | 88 |
| 11.8.1.1 | BS 21 to 26 - Asynchronous Service | 88 |
| 11.8.1.2 | BS 21..... | 88 |
| 11.8.1.3 | BS 22..... | 92 |
| 11.8.1.4 | BS 24..... | 92 |
| 11.8.1.5 | BS 25..... | 92 |
| 11.8.1.6 | BS 26..... | 92 |
| 11.8.1.7 | BS 23..... | 92 |
| 11.8.1.8 | BS 31 to 34 - Synchronous Service..... | 93 |
| 11.8.1.9 | https://standards.iteh.ai/catalog/standards/sist/300/95a3-723a-4773-a890-4ae3a271b755/ist-ets-300-607-1-e4-2005 | |
| 11.8.1.10 | BS 32..... | 93 |
| 11.8.1.11 | BS 31..... | 97 |
| 11.8.1.12 | BS 33..... | 98 |
| 11.8.1.13 | BS 34..... | 98 |
| 11.8.1.14 | BS 61 - Alternate Speech / Data | 98 |
| 11.8.1.15 | 11.8.1.3.1 Speech/Asynchronous Data, Transparent..... | 99 |
| 11.8.1.16 | 11.8.1.3.2 Speech/Asynchronous Data, Non Transparent..... | 101 |
| 11.8.1.17 | 11.8.1.3.3 Speech/Synchronous Data..... | 103 |
| 11.8.1.18 | 11.8.1.4 BS 81 - Speech followed by Data | 104 |
| 11.8.1.19 | 11.8.1.4.1 Speech followed by Asynchronous Data..... | 104 |
| 11.8.1.20 | 11.8.1.4.2 Speech followed by Synchronous Data..... | 104 |
| 11.8.1.21 | 11.8.1.5 TS 61 - Alternate Speech / Facsimile group 3 | 104 |
| 11.8.1.22 | 11.8.1.5.1 TS 61 - Alternate Speech / Facsimile group 3, Transparent..... | 105 |
| 11.8.1.23 | 11.8.1.5.2 TS 61 - Alternate Speech / Facsimile group 3, Non-Transparent..... | 106 |
| 11.8.1.24 | 11.8.1.6 TS 62 - Automatic Facsimile group 3..... | 107 |
| 11.8.2 | MS to SS direction | 107 |
| 11.8.2.1 | 11.8.2.1.1 BS 21 to 26 - Asynchronous Service | 107 |
| 11.8.2.2 | 11.8.2.1.2 BS 21..... | 108 |
| 11.8.2.3 | 11.8.2.1.3 BS 22..... | 112 |
| 11.8.2.4 | 11.8.2.1.4 BS 24..... | 112 |
| 11.8.2.5 | 11.8.2.1.5 BS 25..... | 112 |
| 11.8.2.6 | 11.8.2.1.6 BS 26..... | 112 |
| | BS 23..... | 112 |

| | | | |
|------------|---|---|-----|
| 11.8.2.2 | BS 31 to 34 - Synchronous Service | 113 | |
| 11.8.2.2.1 | BS 32 | 113 | |
| 11.8.2.2.2 | BS 31 | 117 | |
| 11.8.2.2.3 | BS 33 | 118 | |
| 11.8.2.2.4 | BS 34 | 118 | |
| 11.8.2.3 | BS 41 to 46 - PAD Access Asynchronous | 119 | |
| 11.8.2.3.1 | 2) BS 41 | 119 | |
| 11.8.2.3.2 | BS 42 | 120 | |
| 11.8.2.3.3 | BS 44 | 121 | |
| 11.8.2.3.4 | BS 45 | 121 | |
| 11.8.2.3.5 | BS 46 | 121 | |
| 11.8.2.3.6 | BS 43 | 121 | |
| 11.8.2.4 | BS 51 to 53 - Packet Service Synchronous | 122 | |
| 11.8.2.4.1 | 2) BS 51 | 122 | |
| 11.8.2.4.2 | BS 52 | 122 | |
| 11.8.2.4.3 | BS 53 | 122 | |
| 11.8.2.5 | BS 61 - Alternate Speech / Data | 123 | |
| 11.8.2.5.1 | Speech/Asynchronous Data, Transparent | 123 | |
| 11.8.2.5.2 | Speech/Asynchronous Data, Non Transparent | 125 | |
| 11.8.2.5.3 | Speech/Synchronous Data | 127 | |
| 11.8.2.6 | BS 81 - Speech followed by Data | 128 | |
| 11.8.2.6.1 | Speech followed by Asynchronous Data | 128 | |
| 11.8.2.6.2 | Speech followed by Synchronous Data | 128 | |
| 11.8.2.7 | TS 61 - Alternate Speech / Facsimile group 3 | 128 | |
| 11.8.2.7.1 | TS 61 - Alternate Speech / Facsimile group 3, Transparent | 129 | |
| 11.8.2.7.2 | TS 61 - Alternate Speech / Facsimile group 3, Non Transparent | 130 | |
| 11.8.2.8 | TS 62 - Automatic Facsimile group 3 | 131 | |
| 12 | Transceiver | https://standards.iteh.ai/catalog/standards/sist/50b793a3-723a-4773-a890-4ae34271b75/sist-ets-300-607-1-e4-2005 | 132 |
| 12.1 | Conducted spurious emissions | 132 | |
| 12.1.1 | MS allocated a channel | 132 | |
| 12.1.2 | MS in idle mode | 133 | |
| 12.2 | Radiated spurious emissions | 135 | |
| 12.2.1 | MS allocated a channel | 135 | |
| 12.2.2 | MS in idle mode | 137 | |
| 13 | Transmitter | 140 | |
| 13.1 | Frequency error and phase error | 140 | |
| 13.2 | Frequency error under multipath and interference conditions | 143 | |
| 13.3 | Transmitter output power and burst timing | 145 | |
| 13.4 | Output RF spectrum | 152 | |
| 13.5 | Intermodulation attenuation | 158 | |
| 14 | Receiver | 160 | |
| 14.1 | Bad frame indication | 165 | |
| 14.1.1 | Bad frame indication - TCH/FS | 165 | |
| 14.1.1.1 | Bad frame indication - TCH/FS - Random RF input | 165 | |
| 14.1.1.2 | Bad frame indication - TCH/FS - Frequency hopping and downlink DTX | 166 | |
| 14.1.2 | Bad frame indication - TCH/HS | 168 | |
| 14.1.2.1 | Bad frame indication - TCH/HS - Random RF input | 168 | |
| 14.1.2.2 | Bad frame indication - TCH/HS - Frequency hopping and downlink DTX | 169 | |
| 14.1.3 | Bad frame indication - TCH/FS - Frequency hopping and downlink DTX - Phase 2 MS in a phase 1 network | 170 | |
| 14.1.4 | Bad frame indication - TCH/HS - Frequency hopping and downlink DTX - Phase 2 MS in a phase 1 network | 172 | |

iTeh STANDARD PREVIEW (standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/50b793a3-723a-4773-a890-4ae34271b75/sist-ets-300-607-1-e4-2005>

| | | |
|----------|---|-----|
| 14.2 | Reference sensitivity | 174 |
| 14.2.1 | Reference sensitivity - TCH/FS | 174 |
| 14.2.2 | Reference sensitivity - TCH/HS (Speech frames) | 177 |
| 14.2.3 | Reference sensitivity - FACCH/F | 179 |
| 14.2.4 | Reference sensitivity - FACCH/H | 180 |
| 14.2.5 | Reference sensitivity - full rate data channels | 181 |
| 14.2.6 | Reference sensitivity - half rate data channels | 182 |
| 14.3 | Usable receiver input level range | 183 |
| 14.4 | Co-channel rejection | 185 |
| 14.4.1 | Co-channel rejection - TCH/FS | 185 |
| 14.4.2 | Co-channel rejection - TCH/HS | 186 |
| 14.4.3 | Co-channel rejection - TCH/HS (SID frames) | 188 |
| 14.4.4 | Co-channel rejection - FACCH/F | 190 |
| 14.4.5 | Co-channel rejection - FACCH/H | 191 |
| 14.5 | Adjacent channel rejection | 192 |
| 14.5.1 | Adjacent channel rejection - speech channels | 192 |
| 14.5.2 | Adjacent channel rejection - control channels | 194 |
| 14.6 | Intermodulation rejection | 196 |
| 14.6.1 | Intermodulation rejection - speech channels | 196 |
| 14.6.2 | Intermodulation rejection - control channels | 198 |
| 14.7 | Blocking and spurious response | 200 |
| 14.7.1 | Blocking and spurious response - speech channels | 200 |
| 14.7.2 | Blocking and spurious response - control channels | 203 |
| 14.8 | AM suppression | 206 |
| 14.8.1 | AM suppression - speech channels | 206 |
| 14.8.2 | AM suppression - control channels | 207 |
| 15 | Timing advance and absolute delay | 210 |
| 16 | Reception time tracking speed | 212 |
| 17 | Access times during handover | 214 |
| 17.1 | Intra cell channel change | 214 |
| 17.2 | Inter cell handover | 216 |
| 18 | Temporary reception gaps | 219 |
| 19 | Channel release after unrecoverable errors | 221 |
| 19.1 | Channel release after unrecoverable errors -1 | 221 |
| 19.2 | Channel release after unrecoverable errors - 2 | 222 |
| 19.3 | Channel release after unrecoverable errors - 3 | 223 |
| 20 | Cell selection and reselection | 225 |
| 20.1 | Cell selection | 226 |
| 20.2 | Cell selection with varying signal strength values | 228 |
| 20.3 | Basic cell reselection | 230 |
| 20.4 | Cell reselection using TEMPORARY_OFFSET, CELL_RESELECT_OFFSET, POWER_OFFSET and PENALTY_TIME parameters | 232 |
| 20.5 | Cell reselection using parameters transmitted in the System Information type 2bis, type 7 and type 8 messages | 234 |
| 20.5.5 | Test Requirements | 235 |
| 20.6 | Cell reselection timings | 235 |
| 20.6.1 | Definition and applicability | 235 |
| 20.6.2 | Conformance requirement | 235 |
| 20.6.3 | Test purpose | 235 |
| 20.6.4 | Method of test | 236 |
| 20.6.4.1 | Initial conditions | 236 |
| 20.6.4.2 | Procedure | 236 |
| 20.6.5 | Test requirements | 236 |
| 20.7 | Priority of cells | 237 |
| 20.7.4.2 | Procedure | 238 |
| 20.7.5 | Test requirements | 238 |
| 20.8 | Cell reselection when C1 (serving cell) < 0 for 5 seconds | 238 |

| | | |
|-----------|---|-----|
| 20.8.1 | Definition and applicability | 238 |
| 20.8.2 | Conformance requirement | 238 |
| 20.8.3 | Test purpose | 238 |
| 20.8.4 | Method of test..... | 239 |
| 20.8.4.1 | Initial conditions | 239 |
| 20.8.4.2 | Procedure | 239 |
| 20.8.5 | Test requirements | 239 |
| 20.9 | Running average of the surrounding cell BCCH carrier signal levels | 239 |
| 20.9.1 | Definition and applicability | 239 |
| 20.9.2 | Conformance requirement | 239 |
| 20.9.3 | Test purpose | 240 |
| 20.9.4 | Method of test..... | 240 |
| 20.9.4.1 | Initial conditions | 240 |
| 20.9.4.2 | Procedure | 240 |
| 20.9.5 | Test requirements | 240 |
| 20.10 | Running average of the serving cell BCCH carrier signal level | 241 |
| 20.10.1 | Definition and applicability | 241 |
| 20.10.2 | Conformance requirement | 241 |
| 20.10.3 | Test purpose | 241 |
| 20.10.4 | Method of test..... | 241 |
| 20.10.4.1 | Initial conditions | 241 |
| 20.10.4.2 | Procedure | 241 |
| 20.10.5 | Test requirement..... | 241 |
| 20.11 | Updating the list of six strongest neighbour carriers and decoding the BCCH information of a new carrier on the list..... | 242 |
| 20.11.1 | Definition and applicability | 242 |
| 20.11.2 | Conformance requirement | 242 |
| 20.11.3 | Test purpose | 242 |
| 20.11.4 | Method of test..... | 242 |
| 20.11.4.1 | Initial conditions | 242 |
| 20.11.4.2 | Procedure | 242 |
| 20.11.5 | Test requirements | 242 |
| 20.12 | Decoding the BCCH information of the neighbour carriers on the list of six strongest neighbour carriers..... | 243 |
| 20.12.1 | Definition and applicability | 243 |
| 20.12.2 | Conformance requirement | 243 |
| 20.12.3 | Test purpose | 243 |
| 20.12.4 | Method of test..... | 243 |
| 20.12.4.1 | Initial conditions | 243 |
| 20.12.4.2 | Procedure | 243 |
| 20.12.5 | Test requirements | 243 |
| 20.13 | Decoding the BSIC of the neighbour carriers on the list of six strongest neighbour carriers | 244 |
| 20.13.1 | Definition and applicability | 244 |
| 20.13.2 | Conformance requirement | 244 |
| 20.13.3 | Test purpose | 244 |
| 20.13.4 | Method of test..... | 244 |
| 20.13.4.1 | Initial conditions | 244 |
| 20.13.4.2 | Procedure | 244 |
| 20.13.5 | Test requirements | 244 |
| 20.14 | Emergency calls..... | 245 |
| 20.14.1 | Definition and applicability | 245 |
| 20.14.2 | Conformance requirement | 245 |
| 20.14.3 | Test purpose | 245 |
| 20.14.4 | Method of test..... | 245 |
| 20.14.4.1 | Initial conditions | 245 |
| 20.14.4.2 | Procedure | 245 |
| 20.14.5 | Test requirements | 246 |
| 20.15 | Cell reselection due to MS rejection "LA not allowed" | 246 |
| 20.15.1 | Definition and applicability | 246 |
| 20.15.2 | Conformance requirement | 246 |
| 20.15.3 | Test purpose | 246 |
| 20.15.4 | Method of test..... | 247 |

| | | | |
|-------|--|--|-----|
| | 20.15.4.1 | Initial conditions..... | 247 |
| | 20.15.4.2 | Procedure..... | 247 |
| 20.16 | 20.15.5 | Test requirements..... | 247 |
| | Downlink signalling failure | 248 | |
| | 20.16.1 | Definition and applicability | 248 |
| | 20.16.2 | Conformance requirement..... | 248 |
| | 20.16.3 | Test purpose | 248 |
| 20.17 | Cell selection if no suitable cell found in 10 s..... | 249 | |
| 20.18 | Cell reselection due to MS rejection "Roaming not allowed in this LA" | 250 | |
| | 20.18.5 | Test requirements..... | 251 |
| 20.19 | Cell selection on release of SDCCH and TCH..... | 251 | |
| | 20.19.1 | Definition and applicability | 251 |
| | 20.19.2 | Conformance requirement..... | 251 |
| | 20.19.3 | Test purpose | 252 |
| | 20.19.4 | Method of test | 252 |
| | 20.19.4.1 | Initial conditions..... | 252 |
| | 20.19.4.2 | Test procedure..... | 252 |
| 20.19 | 20.19.5 | Test requirements..... | 252 |
| 20.20 | Multiband cell selection and reselection..... | 253 | |
| | 20.20.1 | Multiband cell selection and reselection / Cell Selection | 253 |
| | 20.20.2 | Multiband cell selection and reselection / Cell reselection..... | 255 |
| 21 | Received signal measurements | 257 | |
| 21.1 | Signal strength | 257 | |
| 21.2 | Signal strength selectivity | 260 | |
| 21.3 | Signal quality under static conditions | 261 | |
| | 21.3.1 | Signal quality under static conditions - TCH/FS | 261 |
| | 21.3.2 | Signal quality under static conditions - TCH/HS | 263 |
| | 21.3.2.1 | Procedure..... | 264 |
| 21.4 | Signal quality under TU50 propagation conditions..... | 265 | |
| 22 | Transmit power control timing and confirmation..... | 268 | |
| 23 | Single frequency reference..... https://standards.iteh.ai/catalog/standards/sist/50b7933-723a-4773-a890-4ae3a271b755/sist-ets-300-607-1-e4-2005 | 269 | |
| 24 | Tests of the layer 1 signalling functions..... | 270 | |
| 25 | Tests of the layer 2 signalling functions..... | 271 | |
| 25.1 | Introduction, objective and scope..... | 271 | |
| | 25.1.1 | General | 271 |
| | 25.1.2 | Test configurations | 271 |
| | 25.1.3 | Pre-conditions | 271 |
| | 25.1.4 | Layer 2 test frames | 272 |
| | 25.1.5 | Establishment of the dedicated physical resource..... | 272 |
| | 25.1.6 | Release of the dedicated physical resource | 273 |
| 25.2 | Test sequences..... | 273 | |
| | 25.2.1 | Initialization | 274 |
| | 25.2.1.1 | Initialization when contention resolution required..... | 274 |
| | 25.2.1.1.1 | Normal initialization | 274 |
| | 25.2.1.1.2 | Initialization failure | 275 |
| | 25.2.1.1.2.1 | Loss of UA frame | 275 |
| | 25.2.1.1.2.2 | UA frame with different information field..... | 276 |
| | 25.2.1.1.2.3 | Information frame and supervisory frames in response to an SABM frame..... | 277 |
| | 25.2.1.1.3 | Initialization denial | 277 |
| | 25.2.1.1.4 | Total initialization failure | 278 |
| | 25.2.1.2 | Initialization, contention resolution not required | 279 |
| | 25.2.1.2.1 | Normal initialization without contention resolution | 279 |
| | 25.2.1.2.2 | Initialization failure | 280 |
| | 25.2.1.2.3 | Initialization denial | 282 |
| | 25.2.1.2.4 | Total initialization failure | 282 |

| | | |
|------------|---|-----|
| 25.2.2 | Normal information transfer..... | 283 |
| 25.2.2.1 | Sequence counting and I frame acknowledgements..... | 283 |
| 25.2.2.2 | Receipt of an I frame in the timer recovery state..... | 286 |
| 25.2.2.3 | Segmentation and concatenation | 288 |
| 25.2.3 | Normal layer 2 disconnection | 291 |
| 25.2.4 | Test of link failure | 292 |
| 25.2.4.1 | I frame loss (MS to SS) | 292 |
| 25.2.4.2 | RR response frame loss (SS to MS) | 293 |
| 25.2.4.3 | RR response frame loss (MS to SS) | 293 |
| 25.2.5 | Test of frame transmission with incorrect C/R values..... | 294 |
| 25.2.5.1 | I frame with C bit set to zero..... | 294 |
| 25.2.5.2 | SABM frame with C bit set to zero..... | 295 |
| 25.2.6 | Test of errors in the control field..... | 296 |
| 25.2.6.1 | N(S) sequence error | 296 |
| 25.2.6.2 | N(R) sequence error | 298 |
| 25.2.6.3 | Improper F bit | 299 |
| 25.2.7 | Test on receipt of invalid frames | 299 |
| 26 | Testing of layer 3 functions | 304 |
| 26.1 | Default conditions and structured sequence of tests..... | 304 |
| 26.1.1 | Default test conditions during layer 3 tests..... | 304 |
| 26.1.2 | Structured sequence of the tests | 305 |
| 26.1.3 | General rules for message parameters | 306 |
| 26.1.4 | General rules for layer 3 testing | 306 |
| 26.1.5 | Format of layer 3 test descriptions | 306 |
| 26.2 | Initial tests..... | 308 |
| 26.2.1 | Channel request..... | 308 |
| 26.2.1.1 | Channel request / initial time | 308 |
| 26.2.1.2 | Channel request / repetition time | 309 |
| 26.2.1.3 | Channel request / random reference..... | 311 |
| 26.2.2 | IMSI detach and IMSI attach | 312 |
| 26.2.3 | Sequenced MM / CM message transfer | 316 |
| 26.2.4 | Establishment cause..... | 317 |
| 26.3 | Test of MS functions in idle mode..... | 326 |
| 26.3.1 | Initial conditions..... | 326 |
| 26.3.2 | MS indication of available PLMN..... | 328 |
| 26.3.3 | MS will send only if BSS is "on air" | 329 |
| 26.3.4 | Manual mode of PLMN selection | 329 |
| 26.4 | Lower layer failures in layer 3 testing..... | 331 |
| 26.4.1 | Introduction..... | 331 |
| 26.4.2 | Layer 1 reception failures | 331 |
| 26.4.3 | Data link layer failures | 331 |
| 26.4.4 | Lower layer failures, used for the tests in clause 25 | 331 |
| 26.5 | Handling of unknown, unforeseen, and erroneous protocol data, and of parallel transactions..... | 332 |
| 26.5.1 | Handling of unknown, unforeseen, and erroneous protocol data, and of parallel transactions / unknown protocol discriminator..... | 332 |
| 26.5.2 | Handling of unknown, unforeseen, and erroneous protocol data, and of parallel transactions / TI and skip indicator | 333 |
| 26.5.2.1 | TI and skip indicator / RR | 333 |
| 26.5.2.1.1 | TI and skip indicator / RR / Idle Mode | 333 |
| 26.5.2.1.2 | TI and skip indicator / RR / RR- Connection established..... | 334 |
| 26.5.2.2 | TI and skip indicator / MM | 335 |
| 26.5.2.3 | TI and skip indicator / CC | 337 |
| 26.5.3 | Handling of unknown, unforeseen, and erroneous protocol data, and of parallel transactions / undefined or unexpected message type | 339 |
| 26.5.3.1 | Undefined or unexpected message type / undefined message type / CC | 339 |
| 26.5.3.2 | Undefined or unexpected message type / undefined message type / MM | 340 |
| 26.5.3.3 | Undefined or unexpected message type / undefined message type / RR | 342 |

| | | |
|--------------|---|-----|
| 26.5.3.4 | Undefined or unexpected message type / unexpected message type / CC..... | 343 |
| 26.5.4 | Handling of unknown, unforeseen, and erroneous protocol data, and of parallel transactions / unforeseen information elements in the non-imperative message part | 344 |
| 26.5.4.1 | Unforeseen information elements in the non-imperative message part / duplicated information elements | 344 |
| 26.5.5 | Handling of unknown, unforeseen, and erroneous protocol data, and of parallel transactions / non-semantical mandatory IE errors | 346 |
| 26.5.5.1 | Non-semantical mandatory IE errors / RR | 346 |
| 26.5.5.1.1 | Non-semantical mandatory IE errors / RR / missing mandatory IE error..... | 346 |
| 26.5.5.1.1.1 | Non-semantical mandatory IE errors / RR / missing mandatory IE error / special case | 346 |
| 26.5.5.1.1.2 | Non-semantical mandatory IE errors / RR / missing mandatory IE error / general case..... | 347 |
| 26.5.5.1.2 | Non-semantical mandatory IE errors / RR / comprehension required | 348 |
| 26.5.5.2 | Non-semantical mandatory IE errors / MM | 349 |
| 26.5.5.2.1 | Non-semantical mandatory IE errors / MM / syntactically incorrect mandatory IE | 349 |
| 26.5.5.2.2 | Non-semantical mandatory IE errors / MM / syntactically incorrect mandatory IE | 350 |
| 26.5.5.2.3 | Non-semantical mandatory IE errors / MM / comprehension required | 352 |
| 26.5.5.3 | Non-semantical mandatory IE errors / CC | 354 |
| 26.5.5.3.1 | Non-semantical mandatory IE errors / CC / missing mandatory IE | 354 |
| 26.5.5.3.1.1 | Non-semantical mandatory IE errors / CC / missing mandatory IE / disconnect message | 354 |
| 26.5.5.3.1.2 | Non-semantical mandatory IE errors / CC / missing mandatory IE / general case..... | 355 |
| 26.5.5.3.2 | Non-semantical mandatory IE errors / CC / comprehension required | 356 |
| 26.5.6 | Handling of unknown, unforeseen, and erroneous protocol data, and of parallel transactions / unknown IE, comprehension not required | 357 |
| 26.5.6.1 | Unknown information elements in the non-imperative message part / MM | 357 |
| 26.5.6.1.1 | Unknown IE, comprehension not required / MM / IE unknown in the protocol..... | 357 |
| 26.5.6.1.2 | Unknown IE, comprehension not required / MM / IE unknown in the message..... | 359 |
| 26.5.6.2 | Unknown information elements in the non-imperative message part / CC | 360 |
| 26.5.6.2.1 | Unknown information elements in the non-imperative message part / CC / Call establishment..... | 360 |
| 26.5.6.2.2 | Unknown information elements in the non-imperative message part / CC / disconnect | 361 |
| 26.5.6.2.3 | Unknown information elements in the non-imperative message part / CC / release..... | 362 |

| | | | |
|--------|------------|---|-----|
| | 26.5.6.2.4 | Unknown information elements in the non-imperative message part / CC / release complete | 363 |
| | 26.5.6.3 | Unknown IE in the non-imperative message part, comprehension not required / RR..... | 364 |
| 26.5.7 | | Handling of unknown, unforeseen, and erroneous protocol data, and of parallel transactions / spare bits | 366 |
| | 26.5.7.1 | Spare bits / RR | 366 |
| | | 26.5.7.1.1 Spare bits / RR / paging channel | 366 |
| | | 26.5.7.1.2 Spare bits / RR / BCCH | 367 |
| | | 26.5.7.1.3 Spare bits / RR / AGCH | 369 |
| | | 26.5.7.1.4 Spare bits / RR / Connected Mode | 371 |
| | 26.5.7.2 | Spare bits / MM..... | 373 |
| | 26.5.7.3 | Spare bits / CC | 374 |
| 26.6 | 26.5.8 | Default contents of messages..... | 377 |
| | 26.6.1 | Test of the elementary procedures for radio resource management | 380 |
| | | Immediate assignment..... | 380 |
| | | 26.6.1.1 Immediate assignment / SDCCH or TCH assignment | 380 |
| | | 26.6.1.2 Immediate assignment / extended assignment | 381 |
| | | 26.6.1.3 Immediate assignment / assignment rejection | 384 |
| | | 26.6.1.4 Immediate assignment / ignore assignment | 385 |
| | | 26.6.1.5 Immediate assignment after immediate assignment reject | 387 |
| | 26.6.2 | Test of paging..... | 388 |
| | | 26.6.2.1 Normal paging | 388 |
| | | 26.6.2.1.1 Paging / normal / type 1 | 388 |
| | | 26.6.2.1.2 Paging / normal / type 2 | 391 |
| | | 26.6.2.1.3 Paging / normal / type 3 | 393 |
| | | 26.6.2.2 Paging / extended..... | 394 |
| | | 26.6.2.3 Paging / reorganization | 398 |
| | | 26.6.2.3.1 Paging / reorganization / procedure 1 | 398 |
| | | 26.6.2.3.2 Paging / reorganization / procedure 2 | 401 |
| | | 26.6.2.4 Paging / same as before | 402 |
| | | 26.6.2.5 Paging / multislot CCCH | 403 |
| | 26.6.3 | Test of measurement report | 404 |
| | | https://standards.iteh.ai/catalog/standards/sist/300/93a3-723a-4773-a890-4ae3271b755/sist-ets-300-607-1-e4-2005 | |
| | | 26.6.3.1 Measurement / no neighbours | 405 |
| | | 26.6.3.2 Measurement / all neighbours present | 408 |
| | | 26.6.3.3 Measurement / barred cells and non-permitted NCCs | 412 |
| | | 26.6.3.4 Measurement / DTX | 417 |
| | | 26.6.3.5 Measurement / Frequency Formats | 421 |
| | | 26.6.3.6 Measurement / multiband environment | 424 |
| | 26.6.4 | Test of the channel assignment procedure | 429 |
| | | 26.6.4.1 Dedicated assignment / successful case | 429 |
| | | 26.6.4.2 Dedicated assignment / failure | 440 |
| | | | |
| | | 26.6.4.2.1 Dedicated assignment / failure / failure during active state | 440 |
| | | | |
| | | 26.6.4.2.2 Dedicated assignment / failure / general case | 442 |
| | 26.6.5 | Test of handover | 443 |
| | | 26.6.5.1 Handover / successful / active call / non-synchronized | 444 |
| | | 26.6.5.2 Handover / successful / call under establishment / non-synchronized | 459 |
| | | 26.6.5.3 Handover / successful / active call / finely synchronized | 477 |
| | | 26.6.5.4 Handover / successful / call under establishment / finely synchronized | 482 |
| | | 26.6.5.5 Pre-synchronized handovers | 492 |
| | | | |
| | | 26.6.5.5.1 Handover / successful / active call / pre-synchronized / Timing Advance IE not included | 492 |
| | | | |
| | | 26.6.5.5.2 Handover / successful / call being established / pre-synchronized / timing advance IE is included / reporting of observed time difference requested | 494 |
| | | | |
| | 26.6.5.6 | Handover / successful / active call / pseudo synchronized | 496 |

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 607-1 E4:2005

| | | | |
|---------|------------|--|-----|
| | 26.6.5.7 | Handover / successful / active call / non-synchronized / reporting of observed time difference requested | 498 |
| | 26.6.5.8 | Handover / layer 3 failure | 500 |
| | 26.6.5.9 | Handover / layer 1 failure | 501 |
| 26.6.6 | | Test of frequency redefinition | 502 |
| | 26.6.6.1 | Frequency redefinition..... | 502 |
| 26.6.7 | | Test of the channel mode modify procedure | 508 |
| | 26.6.7.1 | Test of the channel mode modify procedure / full rate..... | 508 |
| | 26.6.7.2 | Test of the channel mode modify procedure / half rate | 510 |
| 26.6.8 | | Test of ciphering mode setting | 512 |
| | 26.6.8.1 | Ciphering mode / start ciphering | 512 |
| | 26.6.8.2 | Ciphering mode / no ciphering | 514 |
| | 26.6.8.3 | Ciphering mode / old cipher key..... | 515 |
| | 26.6.8.4 | Ciphering mode / change of mode, algorithm and key | 516 |
| | 26.6.8.5 | Ciphering mode / IMEISV request | 523 |
| 26.6.9 | | Test of additional assignment..... | 525 |
| 26.6.10 | | Test of partial release | 525 |
| 26.6.11 | | Test of classmark | 525 |
| | 26.6.11.1 | Classmark change | 525 |
| | 26.6.11.2 | Classmark interrogation..... | 527 |
| 26.6.12 | | Test of channel release | 529 |
| | 26.6.12.1 | Channel release / SDCHH | 529 |
| | 26.6.12.2 | Channel release / SDCHH - no L2 ACK..... | 530 |
| | 26.6.12.3 | Channel release / TCH-F | 532 |
| | 26.6.12.4 | Channel release / TCH-F - no L2 ACK | 533 |
| 26.6.13 | | Test of starting time | 534 |
| | 26.6.13.1 | Dedicated assignment with starting time / successful case / time not elapsed..... | 535 |
| | 26.6.13.2 | Dedicated assignment with starting time / successful case / time elapsed..... | 537 |
| | 26.6.13.3 | Dedicated assignment with starting time and frequency redefinition / failure case / time not elapsed..... | 539 |
| | 26.6.13.4 | Dedicated assignment with starting time and frequency redefinition / failure case / time elapsed..... | 542 |
| | 26.6.13.5 | ^{SIST ETS 300 607-1 E4:2005} Handover with starting time / successful case / time not elapsed..... | 544 |
| | 26.6.13.6 | Handover with starting time / successful case / time elapsed..... | 546 |
| | 26.6.13.7 | Handover with starting time and frequency redefinition / failure case / time not elapsed | 548 |
| | 26.6.13.8 | Handover with starting time and frequency redefinition / failure case / time elapsed | 551 |
| | 26.6.13.9 | Immediate assignment with starting time / successful case / time not elapsed | 554 |
| | 26.6.13.10 | Immediate assignment with starting time / successful case / time elapsed | 556 |
| | 26.6.14 | Default contents of GSM 900 layer 3 messages for RR tests | 558 |
| | 26.6.15 | Default contents of DCS 1 800 layer 3 messages for RR tests..... | 569 |
| 26.7 | | Elementary procedures of mobility management..... | 580 |
| | 26.7.1 | TMSI reallocation..... | 580 |
| | 26.7.2 | Authentication | 583 |
| | 26.7.2.1 | Authentication accepted..... | 583 |
| | 26.7.2.2 | Authentication rejected..... | 584 |
| 26.7.3 | | Identification..... | 587 |
| | 26.7.3.1 | General Identification | 587 |
| | 26.7.3.2 | Handling of IMSI shorter than the maximum length..... | 589 |
| 26.7.4 | | Location updating | 592 |
| | 26.7.4.1 | Location updating / accepted | 592 |
| | 26.7.4.2 | Location updating / rejected..... | 595 |
| | 26.7.4.2.1 | Location updating / rejected / IMSI invalid | 595 |
| | 26.7.4.2.2 | Location updating / rejected / PLMN not allowed | 598 |

| | | | |
|----------|--|--|-----|
| | 26.7.4.2.3 | Location updating / rejected / location area not allowed..... | 602 |
| | 26.7.4.2.4 | Location updating / rejected / roaming not allowed in this location area..... | 605 |
| 26.7.4.3 | 26.7.4.3.1 | Location updating / abnormal cases..... | 612 |
| | 26.7.4.3.2 | Location updating / abnormal cases / random access fails | 612 |
| | 26.7.4.3.3 | Location updating / abnormal cases / attempt counter less or equal to 4, LAI different..... | 614 |
| | 26.7.4.3.4 | Location updating / abnormal cases / attempt counter less or equal to 4, stored LAI equal to broadcast LAI | 628 |
| 26.7.4.4 | 26.7.4.4.1 | Location updating / release / expiry of T3240..... | 636 |
| 26.7.4.5 | 26.7.4.5.1 | Location updating / periodic..... | 637 |
| | 26.7.4.5.2 | Location updating / periodic spread | 637 |
| | 26.7.4.5.3 | Location updating / periodic normal / test 1 | 639 |
| | 26.7.4.5.4 | Location updating / periodic normal / test 2 | 641 |
| | 26.7.4.5.4.1 | Location updating / periodic HPLMN search | 644 |
| | 26.7.4.5.4.2 | Location updating / periodic HPLMN search / MS waits time T | 644 |
| | 26.7.4.5.4.3 | Location updating / periodic HPLMN search / MS in manual mode | 645 |
| | 26.7.4.6 | Location updating / interworking of attach and periodic | 648 |
| 26.7.5 | 26.7.5.1 | https://standards.iteh.ai/catalog/standards/sist/506/93a-723a-4773-a690-4ae39771b755/sist-ets-300-607-1-e4-2005 Introduction | 650 |
| | 26.7.5.2 | MM connection / establishment with cipher | 650 |
| | 26.7.5.3 | MM connection / establishment without cipher | 652 |
| | 26.7.5.4 | MM connection / establishment rejected | 653 |
| | 26.7.5.5 | MM connection / establishment rejected cause 4..... | 654 |
| | 26.7.5.6 | MM connection / expiry T3230..... | 655 |
| | 26.7.5.7 | MM connection / abortion by the network | 656 |
| | 26.7.5.7.1 | MM connection / abortion by the network / cause #6..... | 656 |
| | 26.7.5.7.2 | MM connection / abortion by the network / cause not equal to #6 | 659 |
| 26.7.5.8 | 26.7.5.8.1 | MM connection / follow-on request pending | 660 |
| | 26.7.5.8.2 | MM connection / follow-on request pending / test 1 | 660 |
| | 26.7.5.8.3 | MM connection / follow-on request pending / test 2 | 661 |
| | 26.7.5.8.3 | MM connection / follow-on request pending / test 3 | 662 |
| 26.8 | 26.7.6 | Default contents of messages..... | 664 |
| | Tests related to circuit switched call control | 668 | |
| 26.8.1 | 26.8.1.1 | Circuit switched Call Control (CC) state machine verification | 668 |
| | 26.8.1.2 | General on CC state machine verification | 668 |
| | 26.8.1.2.1 | Establishment of an outgoing call | 669 |
| | 26.8.1.2.1.1 | Outgoing call / U0 null state | 671 |
| | 26.8.1.2.2 | Outgoing call / U0 null state / MM connection requested | 671 |
| | 26.8.1.2.2.1 | Outgoing call / U0.1 MM connection pending | 672 |
| | | Outgoing call / U0.1 MM connection pending / CM service rejected | 672 |

iTeh STANDARD REVIEW (standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/506/93a-723a-4773-a690-4ae39771b755/sist-ets-300-607-1-e4-2005>