

ETSI GS MEC 012 v1.1.1 (2017-07)



Mobile Edge Computing (MEC); Radio Network Information API

iTeh STANDARDS PREVIEW
(Standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/349866/b165-47b9-a8bd-128091bfdca4/etsi-gs-mec-012-v1.1.1-201707>

Disclaimer

The present document has been produced and approved by the Mobile Edge Computing (MEC) ETSI Industry Specification Group (ISG) and represents the views of those members who participated in this ISG.
It does not necessarily represent the views of the entire ETSI membership.

Reference
DGS/MEC-0012RnisApi

Keywords
API, MEC, RNIS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD REVIEW
Full standard:
Important notice

The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2017.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and
of the 3GPP Organizational Partners.
oneM2M logo is protected for the benefit of its Members
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	6
Foreword.....	6
Modal verbs terminology.....	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	7
3 Definitions and abbreviations.....	8
3.1 Definitions.....	8
3.2 Abbreviations	8
4 Overview	9
5 Description of the service (informative).....	9
5.1 RNIS service introduction	9
5.2 Sequence diagrams	10
5.2.1 Introduction.....	10
5.2.2 Sending a request for RAB information	10
5.2.3 Sending a request for PLMN information.....	11
5.2.4 Sending a request for S1 bearer information	11
5.2.5 REST based subscribe-notify model.....	12
5.2.5.1 Subscribing to RNI event notifications	12
5.2.5.2 Receiving notification on expiry of RNI event subscription.....	12
5.2.5.3 Updating subscription for RNI event notifications.....	13
5.2.5.4 Unsubscribing from RNI event notifications	14
5.2.6 Receiving RNI event notifications about cell changes.....	14
5.2.7 Receiving RNI event notifications about Radio Access Bearer establishment.....	15
5.2.8 Receiving RNI event notifications about Radio Access Bearer modification	16
5.2.9 Receiving RNI event notifications about Radio Access Bearer release.....	17
5.2.10 Receiving RNI event notifications about UE measurement reports.....	18
5.2.11 Receiving RNI event notifications about UE timing advance	19
5.2.12 Receiving RNI event notifications about carrier aggregation reconfiguration	19
5.2.13 Receiving RNI event notifications about S1 bearer.....	20
6 Data model	21
6.1 Introduction	21
6.2 Resource data types	21
6.2.1 Introduction.....	21
6.2.2 Type: PlmnInfo	21
6.2.3 Type: RabInfo	21
6.2.4 Type: S1BearerInfo.....	22
6.3 Subscription data types.....	23
6.3.1 Introduction.....	23
6.3.2 Type: CellChangeSubscription	23
6.3.3 Type: RabEstSubscription	24
6.3.4 Type: RabModSubscription	25
6.3.5 Type: RabRelSubscription	25
6.3.6 Type: MeasRepUeSubscription	26
6.3.7 Type: MeasTaSubscription	27
6.3.8 Type: CaReconfSubscription	27
6.3.9 Type: S1BearerSubscription	28
6.3.10 Type: SubscriptionLinkList	28
6.4 Notification data types.....	29
6.4.1 Introduction.....	29
6.4.2 Type: CellChangeNotification	29
6.4.3 Type: RabEstNotification	29

6.4.4	Type: RabModNotification	30
6.4.5	Type: RabRelNotification	31
6.4.6	Type: MeasRepUeNotification	31
6.4.7	Type: MeasTaNotification	33
6.4.8	Type: CaReConfNotification	33
6.4.9	Type: ExpiryNotification	34
6.4.10	Type: S1BearerNotification	34
6.5	Referenced structured data types	35
6.5.1	Introduction	35
6.5.2	Type: LinkType	35
6.5.3	Type: TimeStamp	35
6.5.4	Type: AssociateId	36
6.6	Referenced simple data types and enumerations	36
7	API definition	36
7.1	Introduction	36
7.2	Global definitions and resource structure	36
7.3	Resource: rab_info	37
7.3.1	Description	37
7.3.2	Resource definition	38
7.3.3	Resource methods	38
7.3.3.1	GET	38
7.3.3.2	PUT	39
7.3.3.3	PATCH	39
7.3.3.4	POST	39
7.3.3.5	DELETE	39
7.4	Resource: plmn_info	40
7.4.1	Description	40
7.4.2	Resource definition	40
7.4.3	Resource methods	40
7.4.3.1	GET	40
7.4.3.2	PUT	41
7.4.3.3	PATCH	41
7.4.3.4	POST	41
7.4.3.5	DELETE	41
7.5	Resource: s1_bearer_info	42
7.5.1	Description	42
7.5.2	Resource definition	42
7.5.3	Resource methods	42
7.5.3.1	GET	42
7.5.3.2	PUT	43
7.5.3.3	PATCH	43
7.5.3.4	POST	43
7.5.3.5	DELETE	43
7.6	Resource: subscriptions	44
7.6.1	Description	44
7.6.2	Resource definition	44
7.6.3	Resource methods	44
7.6.3.1	GET	44
7.6.3.2	PUT	45
7.6.3.3	PATCH	45
7.6.3.4	POST	45
7.6.3.5	DELETE	45
7.7	Resource: subscriptions/{subscriptionType}	46
7.7.1	Description	46
7.7.2	Resource definition	46
7.7.3	Resource methods	46
7.7.3.1	GET	46
7.7.3.2	PUT	47
7.7.3.3	PATCH	47
7.7.3.4	POST	47
7.7.3.5	DELETE	49

7.8	Resource: existing subscription	49
7.8.1	Description	49
7.8.2	Resource definition	49
7.8.3	Resource methods	49
7.8.3.1	GET	49
7.8.3.2	PUT	50
7.8.3.3	PATCH	52
7.8.3.4	POST	52
7.8.3.5	DELETE	52
Annex A (informative):	Mapping of permissions for RESTful API and topic based alternative transport	54
A.1	Overview	54
A.2	Mapping of permissions - RESTful and topic based alternative transport	54
Annex B (informative):	Complementary material for API utilisation	56
History	57	

iTeh STANDARD PREVIEW
(Standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/96063fdb-b165-47b9-a8bd-128091bfdca4/etsi-gs-mec-012-v1.1-2017-07>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Group Specification (GS) has been produced by ETSI Industry Specification Group (ISG) Mobile Edge Computing (MEC).

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

iTeh STANDARD PREVIEW
(Standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/et96063/et96063-125-47b9-a8bd-128091bfdca4/etsi-gs-mec-012-v1.1-2017-07>

1 Scope

The present document focuses on the Radio Network Information mobile edge service. It describes the message flows and the required information. The present document also specifies the RESTful API with the data model.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

[1] ETSI GS MEC 001: "Mobile Edge Computing (MEC) Terminology".

[2] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".

NOTE: Available at <https://tools.ietf.org/html/rfc6749>.

[3] IETF RFC 6750: "The OAuth 2.0 Authorization Framework: Bearer Token Usage".

NOTE: Available at <https://tools.ietf.org/html/rfc6750>.

[4] IETF RFC 5246: "The Transport Layer Security (TLS) Protocol Version 1.2".

NOTE: Available at <https://tools.ietf.org/html/rfc5246>.

[5] IETF RFC 2818: "HTTP Over TLS".

NOTE: Available at <https://tools.ietf.org/html/rfc2818>.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

[i.1] ETSI GS MEC 002: "Mobile Edge Computing (MEC); Technical Requirements".

[i.2] ETSI GS MEC 003: "Mobile Edge Computing (MEC) Framework and reference architecture".

[i.3] ETSI TS 136 413: "LTE; Evolved Universal Terrestrial Radio Access Network (E-UTRAN); S1 Application Protocol (S1AP) (3GPP TS 36.413)".

[i.4] ETSI TS 123 401: "LTE; General Packet Radio Service (GPRS) enhancements for Evolved Universal Terrestrial Radio Access Network (E-UTRAN) access (3GPP TS 23.401)".

- [i.5] ETSI TS 136 214: "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer; Measurements (3GPP TS 36.214)".
- [i.6] ETSI GS MEC 011: "Mobile Edge Computing (MEC) Mobile Edge Platform Application Enablement".
- [i.7] ETSI TS 136 331: "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC); Protocol specification (3GPP TS 36.331)".
- [i.8] ETSI GS MEC 009: "Mobile Edge Computing (MEC) General principles for Mobile Edge Service APIs".
- [i.9] OpenAPI Specification.

NOTE 1: Available at <https://github.com/OAI/OpenAPI-Specification>.

NOTE 2: OpenAPI Specification version 2.0 is recommended as it is the official release at the time of publication.

- [i.10] Protocol Buffers Language Specification.

NOTE 1: Available at <https://developers.google.com/protocol-buffers/>.

NOTE 2: Protocol Buffers Version 3 Language Specification is recommended as it is the official release at the time of publication.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ETSI GS MEC 001 [1] apply.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI GS MEC 001 [1] and the following apply:

3GPP	3 rd Generation Partnership Project
API	Application Programming Interface
ECGI	E-UTRAN Cell Global Identifier
E-RAB	E-UTRAN Radio Access Bearer
E-UTRAN	Evolved Universal Terrestrial Radio Access Network
GTP	GPRS Tunnelling Protocol
GTP-U	GPRS Tunneling Protocol-User plane
GW	Gateway
HTTP	Hypertext Transfer Protocol
HTTPS	HTTP over TLS
IE	Information Element
IP	Internet Protocol
JSON	Javascript Object Notation
MCC	Mobile Country Code
MMEC	MME Code
MNC	Mobile Network Code
OAI	Open API Initiative
PLMN	Public Land Mobile Network
QCI	Quality Class Indicator
QoS	Quality of Service
RAB	Radio Access Bearer
REST	Representational State Transfer
RFC	Request For Comments
RNI	Radio Network Information
RNIS	Radio Network Information Service

RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
SGW	Serving Gateway
TEID	Tunnel End Point Identifier
TLS	Transport Layer Security
TMSI	Temporary Mobile Subscriber Entity
UE	User Equipment
URI	Uniform Resource Indicator
UTC	Coordinated Universal Time

4 Overview

The present document specifies the Radio Network Information API to support the requirements defined for Mobile Edge Computing in ETSI GS MEC 002 [i.1].

Clause 5 introduces how Radio Network Information Service (RNIS) may be used by the mobile edge applications and by the mobile edge platform. It describes the information flows used for RNI.

The information that can be exchanged over the RNI API is described in clause 6 which provides detailed description on all information elements that are used for RNI.

Clause 7 describes the actual RNI API providing detailed information how information elements are mapped into a RESTful API design.

5 Description of the service (informative)

5.1 RNIS service introduction

Mobile Edge Computing allows running the mobile edge applications at the edge of the network where the environment is characterized by low latency, proximity, high bandwidth and exposure to location and up-to-date radio network information. The information on current radio conditions are shared via the mobile edge platform over Radio Network Information Service.

Radio Network Information Service (RNIS) is a service that provides radio network related information to mobile edge applications and to mobile edge platforms. The Radio Network Information Service is available for authorized mobile edge applications and is discovered over the Mp1 reference point [i.2]. The granularity of the radio network information may be adjusted based on parameters such as information per cell, per User Equipment, per QCI class or it may be requested over period of time. Typical information that may be provided is listed as follows:

- up-to-date radio network information regarding radio network conditions;
- measurement information related to the user plane based on 3GPP specifications;
- information about UEs connected to the radio node(s) associated with the mobile edge host, their UE context and the related radio access bearers;
- changes on information related to UEs connected to the radio node(s) associated with the mobile edge host, their UE context and the related radio access bearers.

The Radio Network Information may be used by the mobile edge applications and platform to optimize the existing services and to provide new type of services that are based on up to date information on radio conditions. An example of mobile edge application that uses radio network information to optimize current services is video throughput guidance. In throughput guidance a radio analytics mobile edge application uses services of Mobile Edge Computing to provide the backend video server with a near real-time indication on the throughput estimated to be available at the radio downlink interface in the next time instant. The throughput guidance radio analytics application computes throughput guidance based on the required radio network information it obtains from a mobile edge service running on the mobile edge host ETSI GS MEC 002 [i.1].

Radio Network Information may be also used by the mobile edge platform to optimize the mobility procedures required to support service continuity.

Radio Network Information may cater for a wide range of use cases, where certain mobile edge application requests a single piece of information using a simple request-response model while other mobile edge applications subscribe to multiple different notifications regarding information changes. It is reasonable to assume that for simple queries the RESTful methods are used. However there may be cases where the frequency of updates is so high and the amount of information is so large that RESTful methods do not scale anymore. In addition, there may be aspects of one-to-many communications, which cannot be efficiently addressed by RESTful interfaces. For those cases, the Radio Network Information may be provided over the message broker of the mobile edge platform. The present document does not specify the actual protocol for a message broker but rather addresses the interoperability aspects by defining stage 2 level definitions to different message types of RNI and by defining the message types in JSON and Protobuf format together with the present document. A mobile edge application queries information on a message broker via the transport information query procedure as defined in ETSI GS MEC 011 [i.6]. In addition, the transport information may be pre-provisioned to the mobile edge application via configuration.

The following clauses describe how the service consumers interact with the Radio Network Information Service over RNI API to obtain contextual information from the radio access network. The sequence diagrams that are relevant for Radio Network Information are presented.

5.2 Sequence diagrams

5.2.1 Introduction

The service consumers communicate with the Radio Network Information Service over RNI API to get contextual information from the radio access network. Both the mobile edge application and mobile edge platform may be service consumers. Radio Network Information may be provided by both the mobile edge platform and the mobile edge application.

The Radio Network Information API supports both queries and subscriptions (pub/sub mechanism) that are used over the RESTful API or over the message broker of the mobile edge platform. A message broker is not specified in detail in the present document, but the sequence diagrams and message types that are used over a message broker are defined. For RESTful architectural style, the present document defines the HTTP protocol bindings.

5.2.2 Sending a request for RAB information

Figure 5.2.2-1 shows a scenario where the service consumer (e.g. a mobile edge application or a mobile edge platform) sends a request to receive a cell level Radio Access Bearer information from the cells that are associated with the requested mobile edge application instance. The response contains information on users in the cells such as the identifiers of the cells, the identifiers associated to UEs in the cells and information on their E-RABs, consisting of the QCI and QoS information.

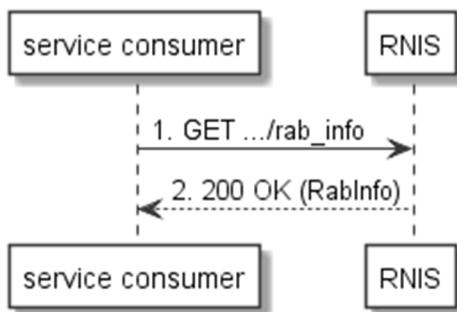


Figure 5.2.2-1: Flow of service consumer requesting Radio Access Bearer information

A service consumer requesting Radio Access Bearer information, as illustrated in figure 5.2.2-1, consists of the following steps:

- 1) Service consumer sends a GET request to the resource representing the RAB information. The request contains a mobile edge application instance identifier as an input parameter.

- 2) RNIS responds with "200 OK" with the message body containing the RabInfo.

5.2.3 Sending a request for PLMN information

Figure 5.2.3-1 shows a scenario where the service consumer (e.g. mobile edge application or mobile edge platform) sends a query to receive cell level PLMN information related to specific mobile edge application instance. The response contains information on cells that are associated with the requested instance of a mobile edge application.

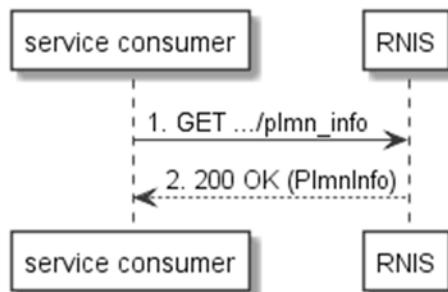


Figure 5.2.3-1: Flow of service consumer requesting PLMN information

A service consumer requesting PLMN information, as illustrated in figure 5.2.3-1, consists of the following steps:

- 1) Service consumer sends a GET request to the resource representing the PLMN information. The request contains a mobile edge application instance identifier as an input parameter.
- 2) RNIS responds with "200 OK" with the message body containing the PlmnInfo associated with the requested mobile edge application instance.

5.2.4 Sending a request for S1 bearer information

With the S1 bearer information acquired from the RNIS, the service consumer (e.g. the mobile edge application or the mobile edge platform) for example optimizes the relocation of mobile edge applications, or uses the acquired information for managing the traffic rules for the related application instances. Figure 5.2.4-1 shows a scenario where the mobile edge application or the mobile edge platform sends a query to receive the S1 bearer information.



Figure 5.2.4-1: Flow of service consumer requesting S1 bearer information

Requesting S1 bearer information, as illustrated in figure 5.2.4-1, consists of the following steps:

- 1) Service consumer sends a GET request to the resource representing the S1 bearer information.
- 2) RNIS responds with "200 OK" with the message body containing the S1 bearer information.

5.2.5 REST based subscribe-notify model

5.2.5.1 Subscribing to RNI event notifications

To receive notifications on selected RNI events, the service consumer creates a subscription to certain specific RNI event that is available at RNIS. Figure 5.2.5.1-1 shows a scenario where the service consumer uses REST based procedures to create a subscription for RNI event notifications.

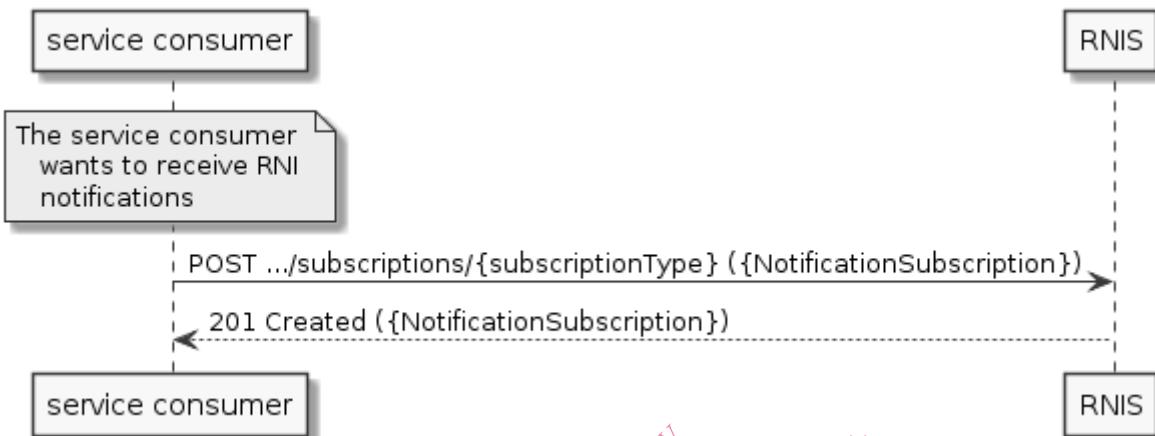


Figure 5.2.5.1-1: Flow of subscribing to the RNI event notifications

Subscribing to the RNI event notifications, as illustrated in figure 5.2.5.1-1, consists of the following steps.

When the service consumer wants to receive notifications about the RNI events, it creates a subscription to the RNI event notifications:

- 1) The service consumer sends a POST request with the message body containing the {NotificationSubscription} data structure to the resource representing the RNI subscription type of interest. The variable {subscriptionType} is replaced with the subscription type specified for different RNI event subscriptions as specified in clause 7.7.2. The variable {NotificationSubscription} is replaced with the data type specified for different RNI event subscriptions as specified in clauses 6.3.2 through 6.3.9 , and it defines the subscribed event, the filtering criteria and the address where the service consumer wishes to receive the RNI event notifications.
- 2) RNIS sends "201 Created" response with the message body containing the data structure specific to that RNI event subscription. The data structure contains the address of the resource created and the subscribed RNI event type.

5.2.5.2 Receiving notification on expiry of RNI event subscription

RNIS may define an expiry time for the RNI event subscription. In case expiry time is used, the time will be included in the {NotificationSubscription} data structure that is included in the response message to the subscription. Prior the expiry, RNIS will also send a notification to the service consumer that owns the subscription.

Figure 5.2.5.2-1 shows a scenario where the service consumer receives a subscription expiry notification for the existing subscription.

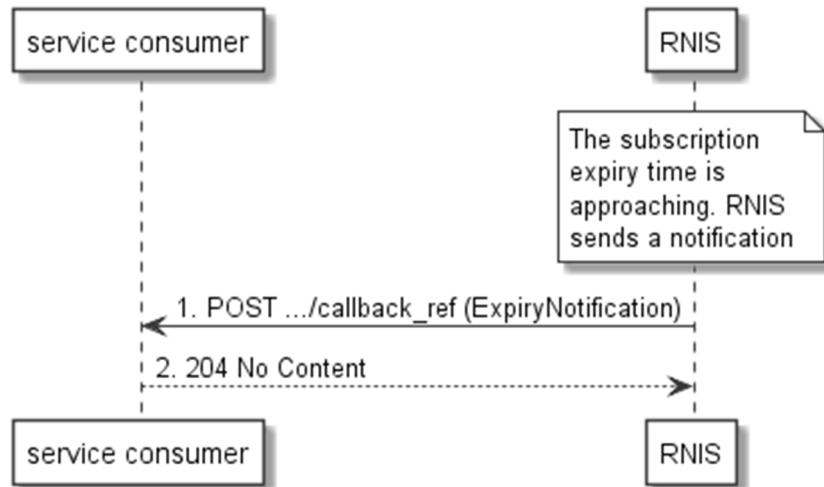


Figure 5.2.5.2-1: Flow of RNIS sending a notification on expiry of the subscription

Sending a notification on expiry of the subscription, as illustrated in figure 5.2.5.2-1 consists of the following steps. If RNIS has defined an expiry time for the subscription, RNIS will send a notification prior the expiry:

- 1) RNIS sends a POST request to the callback reference address included by the service consumer in the subscription request. The POST request contains a data structure ExpiryNotification.
- 2) Service consumer sends a "204 No Content" response.

5.2.5.3 Updating subscription for RNI event notifications

Figure 5.2.5.3-1 shows a scenario where the service consumer needs to update an existing subscription for a RNI event notification. The subscription update is triggered e.g. by the need to change the existing subscription, or due to the expiry of the subscription.

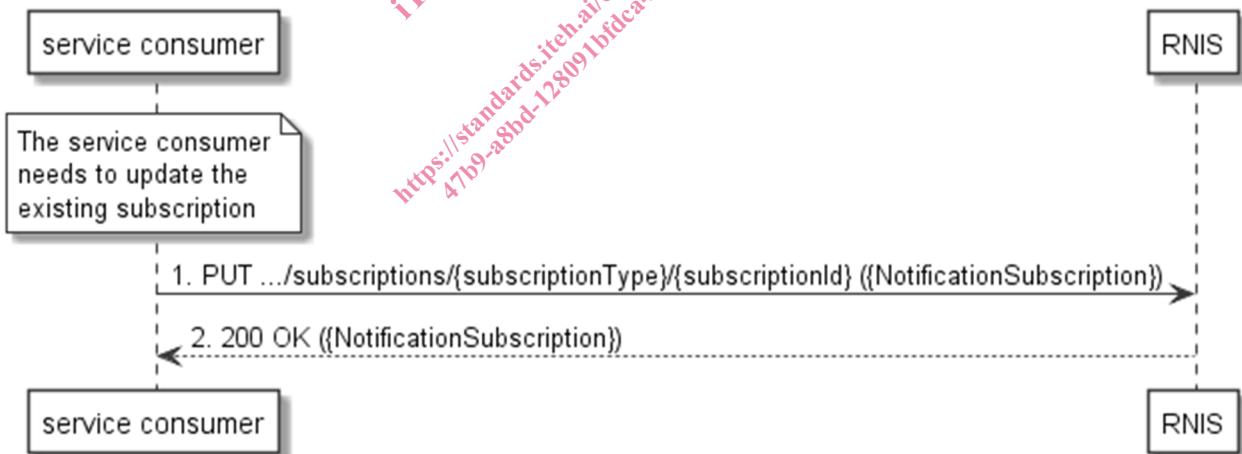


Figure 5.2.5.3-1: Flow of service consumer updating subscription for RNI event notifications

Updating subscription for RNI event notifications, as illustrated in figure 5.2.5.3-1, consists of the following steps.

When the service consumer needs to modify an existing subscription for RNI event notifications, it can update the corresponding subscription as follows:

- 1) Service consumer updates the subscription resource by sending a PUT request to the resource containing all the subscriptions of the specific subscription type with the modified data structure specific to that RNI event subscription.
- 2) RNIS returns "200 OK" with the message body containing the accepted data structure specific to that RNI event subscription.