

SLOVENSKI STANDARD SIST EN 302 296 V2.1.1:2017

01-september-2017

Digitalni prizemni TV-oddajniki - Harmonizirani standard, ki zajema bistvene zahteve člena 3.2 direktive 2014/53/EU

Digital Terrestrial TV Transmitters - Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

iTeh STANDARD PREVIEW (standards.iteh.ai)

Ta slovenski standard je istoveten zi ETSI EN 302 296 V2.1.1 (2017-06)

0d2fce4a71e6/sist-en-302-296-v2-1-1-2017

ICS:

33.060.20 Sprejemna in oddajna Receiving and transmitting

oprema equipment

33.170 Televizijska in radijska Television and radio

difuzija broadcasting

SIST EN 302 296 V2.1.1:2017 en

SIST EN 302 296 V2.1.1:2017

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 302 296 V2.1.1:2017 https://standards.iteh.ai/catalog/standards/sist/6a5ca611-fcd2-4b65-9c19-0d2fce4a71e6/sist-en-302-296-v2-1-1-2017 SIST EN 302 296 V2.1.1:2017

ETSI EN 302 296 V2.1.1 (2017-06)



Digital Terrestrial TV Transmitters; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

SIST EN 302 296 V2.1.1:2017 https://standards.iteh.ai/catalog/standards/sist/6a5ca611-fcd2-4b65-9c19-0d2fce4a71e6/sist-en-302-296-v2-1-1-2017

Reference

REN/ERM-TG17-24

Keywords

broadcasting, digital, harmonised standard, radio, regulation, terrestrial, transmitter, TV, video

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la

iTeh Sous-Préfecture de Grasse (06) N° 7803/88/ IEW

(standards.iteh.ai)

SIST EN 302 296 V2.1.1:2017

https://standards.iteh.ai/catalog/standards/sist/6a5ca611-fcd2-4b65-9c19-

The present document can be downloaded from: http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services: <u>https://portal.etsi.org/People/CommiteeSupportStaff.aspx</u>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2017. All rights reserved.

DECT[™], **PLUGTESTS**[™], **UMTS**[™] and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP**[™] and **LTE**[™] are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

C.0	Introduction		
Anne	x C (informative):	Practical measurement of spurious domain emissions for broadcast transmitters	
Anne	x B (informative):	Void	23
Anne	x A (informative):	Relationship between the present document and the essential requirements of Directive 2014/53/EU	22
5.4.3.4	Test arrangen	nent	21
5.4.3.3	Test requirem	nents	21
5.4.3.2		re	
5.4.3.1		ons	
5.4.3 5.4.3		ssions	
5.4.2.4 5.4.2.5		nent	
5.4.2.3 5.4.2.4		nents	
5.4.2.2 5.4.2.3		onsre	
5.4.2.1 5.4.2.2		approachesons	
5.4.2 5.4.2.1		ns	
5.4.1			
5.4		uites	
5.3.2		signal	
5.3.1		nge	
5.3	Test conditions		17
5.2	Interpretation of the	measurement results	17
5.1		itions for testing	
5	Testing for compliance	e with technical requirements	17
4.2.3.4		/testndards.iteh.ai/catalog/standards/sist/6a5ca61.1-fcd2-4h65-9c19-	
4.2.3.3	Limits	<u>SIST EN 302 296 V2 1.1:2017</u>	12
4.2.3.2	2 Classification	of transmitters	12
4.2.3.1	Definition	ssions (standards.iteh.ai)	12
+.2.2.3 4.2.3			
4.2.2.2 4.2.2.3	Conformance	Teh STANDARD PREVIEW	11
4.2.2.1 4.2.2.2			
4.2.2 4.2.2.1		ns	
4.2.1		ma	
4.2		ements	
4.1		le	
4		ts specifications	
3.2 3.3	-		
3.1			
3		and abbreviations	
2.1 2.2		es	
2 2.1		······································	
2	•		
1	Scope		6
Introd	luction		5
Mode	1 warbs tarminalasy		5
Forew	ord		5
Intelle	ectual Property Rights.		5
_			

ETSI EN 302 296 V2.1.1 (2017-06)

C.1	Directional coupler issues	24
C.2	Spectrum analyser settings	26
C.3	Composite measurement of spurious emissions	26
Ann	ex D (informative): Practical Measurement of out-of-band Domain Emissions	27
D.1	Composite measurement of out-of-band emissions	27
D.2	System considerations	28
D.3	Spectrum analyser settings for OOB measurements	29
D.4	OOB domain emissions - typical spectrum analyser traces	29
D.5	ACLR measurement	30
Ann	ex E (informative): Impact of ACLR of low power broadcast transmitters on adjacent DVB-T/T2 services for co-sited networks	31
E.0	Introduction	31
E.1	Equipment Configuration	31
E.2	Results	32
E.3	Theoretical impact of MER on END	33
E.4	Conclusions	33
Ann	ex F (informative): Energy Efficiency and the impact on unwanted Out of Block Emissions	34
Ann	ex G (informative): (standards.iteh.ai) Bibliography	35
Ann	ex H (informative): Change history N 302 296 V2.1.1:2017 https://standards.iteh.ai/catalog/standards/sist/6a5ca611-fcd2-4b65-9c19-	36
Histo	https://standards.iteh.ai/catalog/standards/sist/6a5ca611-fcd2-4b65-9c19- Dry	37

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Harmonised European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.3] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.2].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

(standards.iteh.ai)

National transposition dates Date of adoption of this ENps://standards.iteh.ai/catalog/standards/sist/6a5ca611-fcd2-260 fune 2017 Od2 fce4a71e6/sist-en-302-296-v2-1-1-2017 Date of latest announcement of this EN (doa): Date of latest publication of new National Standard or endorsement of this EN (dop/e): 31 March 2018 Date of withdrawal of any conflicting National Standard (dow): 31 March 2019

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

Introduction

The present document has been produced to update the existing standard in line with the requirements of article 3.2 of Directive 2014/53/EU [i.2].

1 Scope

The present document specifies technical characteristics and methods of measurements for digital terrestrial television transmitters as defined in table 1.1 and in table 1.2. The output power classification (table 1.1) and emission classification (table 1.2) are combined to define a transmitter category. For example, power classification H and emission classification 0 denotes a high power transmitter (category H0) whose OOB emissions comply with a non-critical mask.

Table 1.1: Transmitter power classification

Power Class	Description	Notes
Н	High power transmitter	Transmitter with an output power ≥ 25 W operating in the VHF band (174 MHz to 230 MHz) or UHF band (470 MHz to 694 MHz).
L	Low power transmitter	Transmitter with an output power < 25 W operating in the VHF band (174 MHz to 230 MHz) or UHF band (470 MHz to 694 MHz).

Table 1.2: Transmitter emission classification

Emission Classification	Conformance approach	Notes
0	Non critical mask iTeh STAN	For high power transmitters, the mask defines the level of the OOB relative to the channel power (dBc). For low power transmitters the mask defines the absolute power limit of the OOB (dBm). The former approach is mandated by RRC-06 (non-critical case) [i.4] for transmitters subject to coordination.
	ow I (stand	
1	Critical mask (Stand	A similar but more stringent approach based on RRC-06 (sensitive case) [i.4].
2	Non-critical ACLR SIST EN	A set of ACLR limits defining permitted relative emission levels into adjacent channels.
3		A set of more stringent ACLR limits defining permitted
	0d2fce4a71e6/s	relative emission-levels into adjacent channels.

The present document covers the essential requirements of article 3.2 of Directive 2014/53/EU [i.2] under the conditions identified in annex A.

2 References

2.1 Normative references

References are specific, identified by date of publication and/or edition number or version number. Only the cited version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at https://docbox.etsi.org/Reference/.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

[1]	Void.
[2]	Void.
[3]	Void.

- Void. [4]
- [5] CENELEC EN 55016-4-2:2011/A1:2014: "Specification for radio disturbance and immunity measuring apparatus and methods. Part 4-2: Uncertainties, statistics and limit modelling -Measurement instrumentation uncertainty".
- [6] Recommendation ITU-R SM.329-12 (09/2012): "Unwanted emissions in the spurious domain".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the

ser with regard to a particular subject area.		
	[i.1]	ETSI TR 101 290 (V1.2.1) (05-2001): "Digital Video Broadcasting (DVB); Measurement guidelines for DVB systems".
	[i.2]	Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.
	[i.3]	Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.
	[i.4]	ITU RRC-06: "Final Acts of the Regional Radiocommunication Conference for planning of the digital terrestrial broadcasting service in parts of Regions 1 and 3, in the frequency bands 174-230 MHz and 470-862 MHz", Geneva, 15 May - 16 June 2006.
	[i.5]	The Paris climate agreement (COP21), December 2015.
	NOTE:	Available at http://ec.europa.eu/clima/policies/international/negotiations/future/index_en.htm .

- ETSI EN 300 744 (V1.6.2) (10-2015): "Digital Video Broadcasting (DVB); Framing structure, [i.6] channel coding and modulation for digital terrestrial television".
- ETSI EN 302 755 (V1.4.1) (07-2015): "Digital Video Broadcasting (DVB); Frame structure [i.7] channel coding and modulation for a second generation digital terrestrial television broadcasting system (DVB-T2)".
- ETSI TR 100 028 (all parts) (V1.4.1) (12-2001): "Electromagnetic compatibility and Radio [i.8] spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- ETSI TR 100 028-2 (V1.4.1) (12-2001): "Electromagnetic compatibility and Radio spectrum [i.9] Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in Directive 2014/53/EU [i.2] and the following apply:

adjacent channel leakage ratio: ratio of the wanted mean power of the DVB-T/T2 signal to the unwanted mean power measured in the receiver bandwidth of a given adjacent victim service

antenna port: port of an apparatus intended to be connected to an antenna using coaxial cable or coaxial line; typically the output of the channel filter or combiner

carrier power: mean power supplied to the antenna port by a transmitter with COFDM

channel bandwidth: frequency band of defined width (as a multiple of the carrier grid) for operation on adjacent channels, located symmetrically around carrier frequency in the carrier grid

composite approach: measurement method whereby the power amplifier emissions are measured separately to the frequency response of subsequent frequency selective components and the overall emissions of the transmitter are calculated by combining the two sets of measurements

co-sited: DVB-T/T2 transmitters which are located at the same physical site so minimizing the effects of adjacent channel interference

dBc: decibels relative to the mean power P of the emission PREVIEW

digital signal: discretely timed signal in which information is represented by a finite number of well-defined discrete values that its characteristic quantities may take in time results. Item. al

digital television: television in which all information is represented by a digital signal SIST EN 302-296 V2.1.1-2017

environmental profile: range of environmental conditions under which equipment within the scope of the present document is required to comply with the provisions of the present document 2017

harmonic: component of order greater than 1 of the Fourier series of a periodic quantity

high power transmitter: transmitter whose conducted output power is greater than or equal to 25 W (this category of transmitter also includes medium power category of transmitters as defined in ITU-R)

intermodulation products: unwanted frequencies resulting from intermodulation between carriers or harmonics of emission, or between any oscillations generated to produce the carrier

low power transmitter: transmitter whose conducted output power is less than 25 W

mean power: average power supplied to the antenna port by a transmitter during an interval of time sufficiently long compared with the lowest frequency encountered in the modulation taken under normal operating conditions

moding: operation of a coaxial component in unwanted waveguide modes (e.g. Transverse Electric (TE) or Transverse Magnetic (TM)) resulting in anomalous behaviour from that associated with the intended Transverse Electromagnetic (TEM) mode

necessary bandwidth: for a given class of emission, the width of the frequency band which is sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions

OOB emissions: unwanted emissions which fall at frequencies separated from the centre frequency of the wanted emission by less than or equal to 250 % of the channel bandwidth

output power: conducted power delivered by a transmitter under specified conditions of operation

receiver bandwidth: bandwidth used for victim service ACLR measurements, i.e. 7,6 MHz for 8 MHz DVB-T, 6,7 MHz for 7 MHz DVB-T, 7,8 MHz for 8 MHz DVB-T2, 6,8 MHz for 7 MHz DVB-T2 and 9 MHz for LTE

reference bandwidth: bandwidth in which the emission level is specified

9

spurious domain emissions: unwanted emissions at frequencies separated by more than 250 % of the channel bandwidth from the centre of the occupied spectrum

3.2 **Symbols**

For the purposes of the present document, the following symbols apply:

milli m micro μ nano n inch

3.3 **Abbreviations**

For the purposes of the present document, the abbreviations given in ETSI EN 300 744 [i.6], ETSI EN 302 755 [i.7] and the following apply:

ACLR Adjacent Channel Leakage Ratio Coded Orthogonal Frequency Division Multiplexing **COFDM CSV** Comma Separated Values dB Logarithmic ratio (tenths of a "Bel") dB relative to one milliwatt dBm

DIN Deutsches Institut für Normung Digital Terrestrial Television DTT Digital Video Broadcasting DVB

Digital Video Broadcasting - Terrestrial D PREVIEW DVB-T

European Free Trade Association **EFTA**

Equivalent Noise Degradation dards.iteh.ai) **END**

EUT **Equipment Under Test**

Fast Fourier Transform FFT

GigaHertz/ GHz Grander Standards, iteh. ai/catalog/standards/sist/6a5ca611-fcd2-4b65-9c19-International Telecommunication Union 2,206, v2, 1-1, 2017

ITU

International Telecommunication Union - Radiocommunication ITU-R

kiloHertz kHz

MER Modulation Error Ratio

MHz MegaHertz OOB Out-Of-Band Power Amplifier PA

Quadrature Amplitude Modulation **QAM**

RBW Reference BandWidth RF Radio Frequency Root Mean Square **RMS**

Regional Radiocommunication Conference **RRC**

TV Television

Ultra High Frequency UHF United Kingdom UK **VBW** Video BandWidth **VHF** Very High Frequency

Watt

4 Technical requirements specifications

4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the manufacturer. The equipment shall comply with all the technical requirements of the present document which are identified as applicable in annex A at all times when operating within the boundary limits of the declared operational environmental profile.

4.2 Conformance requirements

4.2.1 Introduction

The essential parameters and corresponding technical requirements aiming to meet the requirements of article 3.2 of Directive 2014/53/EU [i.2] are shown in table 4.1. To fulfil this essential parameter the compliance with all the corresponding technical requirements in table 4.1 shall be verified.

Table 4.1: Cross references

Essential parameter	Corresponding technical requirements
Conducted emissions at the antenna port	4.2.2 Spurious emissions
·	4.2.3 Out-of-band emissions (OOB)

Both spurious emission limits and OOB limits are defined in terms of conducted power at the antenna port.

The boundary between spurious domain emissions and out-of-band emissions is shown in figure 4.1.

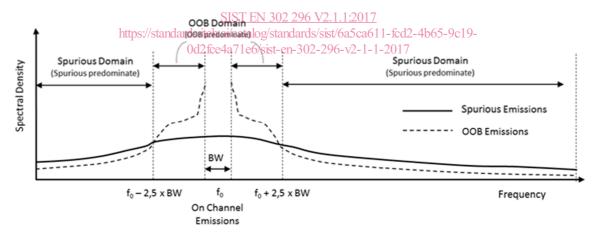


Figure 4.1: Definition of out-of-band and Spurious Domains

4.2.2 Spurious emissions

4.2.2.1 Definition

Spurious emissions are unwanted emissions at frequencies separated by more than 250 % of the channel bandwidth from the centre of the occupied spectrum. These include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products but exclude out-of-band emissions.

For the purposes of the present document spurious emissions are emissions at frequencies outside the frequency range $f_0 \pm 17.5$ MHz for 7 MHz channels, $f_0 \pm 20$ MHz for 8 MHz channels, where f_0 is the centre frequency of the channel, irrespective of the number of carriers employed.