



SLOVENSKI STANDARD SIST ETS 300 200 E1:2003

01-december-2003

**Digitalno omrežje z integriranimi storitvami (ISDN) – Dopolnilna storitev:
brezpogojna podaja klica (CFU) – Opis storitve**

Integrated Services Digital Network (ISDN); Call Forwarding Unconditional (CFU)
supplementary service; Service description

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **ETS 300 200 Edition 1**
SIST ETS 300 200 E1:2003
<https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-faca-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003>

ICS:

33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)
--------	---	--


SIST ETS 300 200 E1:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 200 E1:2003

<https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-1aea-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003>

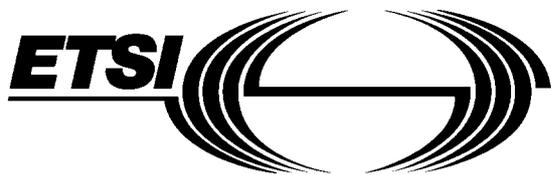

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 200

December 1994

Source: ETSI TC-NA

Reference: DE/NA-012205

ICS: 33.080

Key words: ISDN, supplementary service

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Integrated Services Digital Network (ISDN);
Call Forwarding Unconditional (CFU) supplementary service
Service description

SIST ETS 300 200 E1:2003
<https://standards.iteh.ai/catalog/standards/sist/ets-300-200-e1-2003>
2062e0b97bca/sist-ets-300-200-e1-2003

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1994. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 200 E1:2003](https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-1aea-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-1aea-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003>

Contents

Foreword	5
1 Scope	7
2 Normative references	7
3 Definitions	8
4 Symbols and abbreviations	9
5 Description	9
6 Procedures	9
6.1 Provision and withdrawal	9
6.2 Normal procedures	10
6.2.1 Activation, deactivation and registration	10
6.2.1.1 Activation	10
6.2.1.2 Deactivation	11
6.2.1.3 Registration	12
6.2.2 Erasure	12
6.2.3 Invocation and operation	12
6.2.3.1 Served user's view	12
6.2.3.2 Forwarded-to user's view	13
6.2.3.3 Calling user's view	13
6.2.4 Interrogation	14
6.3 Exceptional procedures	15
6.3.1 Activation, deactivation and registration	15
6.3.1.1 Activation	15
6.3.1.2 Deactivation	16
6.3.1.3 Registration	16
6.3.2 Erasure	16
6.3.3 Invocation and operation	17
6.3.4 Interrogation	17
7 Intercommunication considerations	17
7.1 Interworking with non-ISDNs	18
7.2 Interworking with private ISDN	18
8 Interaction with other supplementary services	18
8.1 Advice of charge services	18
8.1.1 Charging information at call set-up time	18
8.1.2 Charging information during the call	19
8.1.3 Charging information at the end of the call	19
8.2 Call waiting	19
8.3 Call hold	19
8.4 Explicit call transfer	19
8.5 Number identification services	19
8.5.1 Calling line identification presentation	19
8.5.2 Calling line identification restriction	19
8.5.3 Connected line identification presentation	20
8.5.4 Connected line identification restriction	20
8.6 Closed user group	20
8.7 Completion of calls to busy subscribers	20
8.8 Conference services	21
8.8.1 Conference call, add-on	21
8.8.2 Meet-me conference	21

8.9	Direct dialling in	21
8.10	Diversion services	21
8.10.1	Call forwarding unconditional	21
8.10.2	Call forwarding busy	21
8.10.3	Call forwarding no reply	21
8.10.4	Call deflection	21
8.11	Freephone	22
8.12	Malicious call identification	22
8.13	Multiple subscriber number	22
8.14	Subaddressing	22
8.15	Terminal portability	22
8.16	Three party	22
8.17	User-to-user signalling	23
	History	24

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 200 E1:2003](https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-1aea-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-1aea-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Network Aspects (NA) Technical Committee of the European Telecommunications Standards Institute (ETSI).

In accordance with CCITT Recommendation I.130 [1], the following three level structure is used to describe the supplementary telecommunications services as provided by European public telecommunications operators under the pan-European Integrated Services Digital Network (ISDN):

- Stage 1: is an overall service description, from the user's standpoint;
- Stage 2: identifies the functional capabilities and information flows needed to support the service described in stage 1; and
- Stage 3: defines the signalling system protocols and switching functions needed to implement the service described in stage 1.

This ETS details the stage 1 aspects (overall service description) for the Call Forwarding Unconditional (CFU) supplementary service. The stage 2 and stage 3 aspects are detailed in ETS 300 204 (1994) and ETS 300 207 (1994), respectively.

Proposed transposition dates	
Date of latest announcement of this ETS (doa):	31 March 1995
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	30 September 1995
Date of withdrawal of any conflicting National Standard (dow):	30 September 1995

[SIST ETS 300 200 E1:2003](https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-1aea-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-1aea-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003>

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 200 E1:2003](https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-1aea-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/aabb7c5c-1aea-4d1b-83a9-2062e0b97bca/sist-ets-300-200-e1-2003>

1 Scope

This standard defines the stage one of the Call Forwarding Unconditional (CFU) supplementary service for the Pan-European Integrated Services Digital Network (ISDN) as provided by European public telecommunications operators. Stage one is an overall service description from the user's point of view, but does not deal with the details of the human interface itself (see CCITT Recommendation I.130 [1]).

This standard defines the interworking requirements of private ISDNs with the public ISDN.

In addition this standard specifies the base functionality where the service is provided to the user via a private ISDN.

This standard does not specify the additional requirements where the service is provided to the user via a telecommunications network that is not an ISDN but does include interworking requirements of other networks with the public ISDN.

Charging principles are outside the scope of this standard.

Interaction with supplementary services not listed in clause 8 are outside the scope of this standard.

The CFU supplementary service enables a served user to have the network redirect to another user calls which are addressed to the served user's ISDN number. The CFU supplementary service may operate on all calls, or just those associated with specified basic services. The served user's ability to originate calls is unaffected by the CFU supplementary service. After the CFU supplementary service has been activated, calls are forwarded independent of to the status of the served user.

The CFU supplementary service is applicable to all circuit-switched telecommunication services.

This standard is applicable to the stage two and stage three standards for the ISDN CFU supplementary service. The terms "stage two" and "stage three" are also defined in CCITT Recommendation I.130 [1]. Where the text indicates the status of a requirement (i.e. as strict command or prohibition, as authorization leaving freedom, as a capability or possibility), this shall be reflected in the text of the relevant stage two and stage three standards.

Furthermore, conformance to this standard is met by conforming to the stage three standards with the field of application appropriate to the equipment being implemented. Therefore, no method of testing is provided for this standard.

2 Normative references

This standard incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of, any of these publications apply to this standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] CCITT Recommendation I.130 (1988): "Method for the characterization of telecommunication services supported by an ISDN and network capabilities of an ISDN".
- [2] CCITT Recommendation I.112 (1988): "Vocabulary of terms for ISDNs".
- [3] CCITT Recommendation E.164 (1991): "Numbering plan for the ISDN era".
- [4] CCITT Recommendation I.210 (1988): "Principles of telecommunication services supported by an ISDN and the means to describe them".
- [5] CCITT Recommendation Q.9 (1988): "Vocabulary of switching and signalling terms".

3 Definitions

For the purposes of this standard, the following definitions apply:

Integrated Services Digital Network (ISDN): See CCITT Recommendation I.112 [2], § 2.3, definition 308.

(basic) service; telecommunication service: See CCITT Recommendation I.112 [2], § 2.2, definition 201.

user A: The calling user in a call which is subject to diversion.

user B: The served user when a call (from user A) is subject to the CFU supplementary service.

NOTE: In the context of multiple diversions, a suffix is used, e.g. 1, 2, ... n, n+1, ... m, to denote the successive diverting users. For example, user B3 is also the diverted-to user with respect to the diversion applied at user B2.

user C: The forwarded-to user in a call which is subject to the CFU supplementary service. In the case of a call which is subject to multiple diversions, user C is the forwarded-to user with respect to the final call forwarding.

diverted-to user: A user to whom a call is redirected as a result of diversion.

supplementary service: See CCITT Recommendation I.210 [4], § 2.4.

ISDN number: A number conforming to the numbering plan and structure specified in CCITT Recommendation E.164 [3].

basic access: See CCITT Recommendation Q.9 [5], § 1, definition 1551.

primary rate access: See CCITT Recommendation Q.9 [5], § 1, definition 1552.

address: see CCITT Recommendation E.164 [3], § 12.

subaddress: See CCITT Recommendation E.164 [3], § 12.2.

served user: The user to whom the CFU supplementary service is provided.

forwarded-to user: A user to whom the call is redirected as a result of forwarding.

(call) forwarding: A general term applied to any functionality whereby a call is redirected automatically by the service provider to another user. The forms of forwarding are: unconditional, whereby all calls are redirected; busy, whereby calls encountering busy are redirected; and, no reply, whereby calls which are not answered within a time period are redirected.

diversion: A general term which includes all forms of forwarding, and includes deflection whereby calls are redirected by the user instead of being answered.

basic call procedures: The procedures by which a call (as an instance of a basic telecommunication service) is established and terminated.

diverting user: A user for whom the call is subjected to diversion.

4 Symbols and abbreviations

CFU	Call Forwarding Unconditional
ISDN	Integrated Services Digital Network
PSTN	Public Switched Telephone Network

5 Description

The CFU supplementary service shall be available to users who are connected to the network via a basic access or a primary rate access.

The CFU supplementary service enables a served user to have the network redirect to another user calls which are addressed to the served user's ISDN number. The CFU supplementary service may operate on all calls, or just those associated with specified basic services. The served user's ability to originate calls is unaffected by the CFU supplementary service. After the CFU supplementary service has been activated, calls are forwarded independent of the status of the served user.

As a service provider option, a subscription option can be provided to enable the served user to receive an indication that the CFU supplementary service has been activated. This indication shall be provided when the served user originates a call if the CFU supplementary service has been activated for the served user's ISDN number and for the basic service requested for the call.

The maximum number of diversions permitted for each call is a service provider option with an upper limit of five diversions. When counting the number of diversions, all types of diversion are included.

6 Procedures

6.1 Provision and withdrawal

The CFU supplementary service shall be provided after prior arrangement with the service provider.

As a service provider option, the CFU supplementary service can be provided on a per ISDN number basis, or the CFU supplementary service can apply to the whole access. If a service provider offers both of these options, then it shall be a subscription option to choose which of these options applies.

In addition, the CFU supplementary service (including options) can be subscribed to for all basic services subscribed to by the user, or as a service provider option, the user can identify particular basic service(s) for which the CFU supplementary service shall apply.

As a service provider option, the service can be offered with one or more of four subscription options, which can apply separately to each basic service subscribed to. If the CFU supplementary service is provided on a per ISDN number basis, then these options can apply separately to each ISDN number. For each subscription option, only one value can be selected. Subscription options are summarized in table 1.