
INTERNATIONAL STANDARD



748

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Liquid flow measurement in open channels — Velocity-area methods

Mesure de débit des liquides dans les canaux découverts — Méthodes d'exploration du champ des vitesses

Second edition — 1979-04-01

Corrected and reprinted — 1979-04-15

ITeH STANDARD PREVIEW
(standards.iteh.ai)

ISO 748:1979

<https://standards.iteh.ai/catalog/standards/sist/c42a7407-efâ4-4734-a2c5-fc13d10a4006/iso-748-1979>

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 748 was developed by Technical Committee ISO/TC 113, *Measurement of liquid flow in open channels*, and was circulated to the member bodies in August 1977.

STANDARD PREVIEW
(standards.iteh.ai)

It has been approved by the member bodies of the following countries:

Australia	India	Switzerland
Canada	Italy	Turkey
Chile	Mexico	United Kingdom
Czechoslovakia	Netherlands	USA
Egypt, Arab Rep. of	Norway	USSR
Finland	Romania	Yugoslavia
France	South Africa, Rep. of	
Germany, F. R.	Spain	

<https://standards.iteh.ai/catalog/standards/sist/c42a7407-efa4-4734-a2c5-fc13d1134f09/iso-748-1979>

No member body expressed disapproval of the document.

This second edition cancels and replaces the first edition (i.e. ISO 748-1973).

Liquid flow measurement in open channels — Velocity-area methods

1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies methods for determining the velocity and cross-sectional area of water flowing in open channels (with or without ice cover), and for computing the discharge therefrom.

It covers methods of employing current-meters and floats to measure the velocities. Although, in most cases, these measurements are intended to determine the stage-discharge relation by means of readings at several stages, this International Standard deals only with single measurements of the discharge; the continuous recording of discharges over a period of time is covered in ISO 1100.

NOTE — Measurements for the purpose of determining the discharge in efficiency tests of hydraulic turbines are specified in IEC Publication 41, International code for the field acceptance tests of hydraulic turbines.

2 REFERENCES

- ISO 31, *Quantities, units and symbols*.
- ISO 772, *Liquid flow measurement in open channels — Vocabulary and symbols*.
- ISO 1000, *SI units and recommendations for the use of their multiples and of certain other units*.
- ISO 1088, *Collection of data for determination of errors in measurement of liquid flow by velocity area methods*.
- ISO 1100, *Liquid flow measurement in open channels — Establishment and operation of a gauging-station and determination of the stage-discharge relation*.
- ISO 2537, *Liquid flow measurement in open channels — Cup-type and propeller-type current meters*.
- ISO 3454, *Liquid flow measurement in open channels — Sounding and suspension equipment*.
- ISO 3455, *Liquid flow measurement in open channels — Calibration of rotating-element current-meters in straight open tanks*.
- ISO 4366, *Liquid flow measurement in open channels — Echo sounders*.
- ISO 4373, *Liquid flow measurement in open channels — Water level measuring devices*.
- ISO 5168, *Calculation of the uncertainty of a measurement of flowrate*.

ISO/DATA No. 2, *Investigation of the total error in measurement of flow by velocity-area methods*.

3 TERMINOLOGY

For the purposes of this International Standard, in addition to the definition given in ISO 772, the following definitions shall apply :

3.1 frazil ice : Fine spicules or plates of ice suspended in water that are generally formed by supercooling of turbulent water. Frazil ice may float under an ice cover and accumulate as slush.

3.2 rime ice : A white mass of tiny ice crystals or granular ice tufts formed on exposed objects due to atmospheric moisture.

4 UNITS OF MEASUREMENT

The units of measurement used in this International Standard are SI units.

5 PRINCIPLE OF THE METHODS OF MEASUREMENTS

5.1 The principle of these methods consists in measuring flow velocity and cross-sectional area. A measuring site is chosen conforming to the specified requirements; the width, depending on its magnitude, is measured either by means of steel tape or by some other surveying method, and the depth is measured at a number of verticals along the width, sufficient to determine the shape and area of cross-section.

Velocity observations are made at each vertical preferably at the same time as measurement of depth, especially in the case of unstable beds; they are made by any one of the standard methods using current-meters. The principle involved is based on the proportionality between the local flow velocity and the speed of the rotor. Under certain circumstances, velocity observations are also made using surface-floats and velocity rods. The mean velocity is generally computed from the individual observations; however, in certain methods such as the integration method, the mean velocity is obtained directly.

5.2 The discharge is computed either arithmetically or graphically by summing the products of the velocity and corresponding area for a series of observations in a cross-section.

6 SELECTION AND DEMARCATION OF SITE

6.1 Initial survey of site

It is desirable that approximate measurements of widths, depths and velocities should be made in a preliminary survey to decide on the suitability of a site conforming as far as possible with the conditions given in 6.2. It is only intended that these measurements should serve as a guide that both the longitudinal and transverse bed profiles and the velocity distribution are acceptable for the purpose of discharge measurement.

6.2 Selection of site

The accuracy of the determination of the discharge by the velocity-area method is increased if :

- a) the conditions of flow do not change within the period of measurement;
- b) the velocities at all points are parallel to one another and at right angles to the measuring section;
- c) the curves of the distribution of the velocities are regular in the vertical and horizontal planes on which they are measured;
- d) the geometrical dimensions of the cross-section of the open channel are clearly defined.

Hence, the most favourable conditions for accurate measurements are to be found where the cross-section is in a straight reach. On this basis, therefore, the site shall be selected such that, as far as possible, the requirements and points given in 6.2.1 and 6.2.2 are met.

6.2.1 The site selected shall comply, as far as possible, with the following requirements :

- a) the channel at the measuring site shall be straight and of uniform cross-section and slope, as far as possible, in order to avoid an abnormal velocity distribution. When the length of the straight channel is restricted, it is recommended for current-meter measurements that the straight length upstream of the measuring section should be twice that downstream;
- b) the depth of water in the selected reach shall be sufficient to provide for the effective immersion of either the current-meter or floats, whichever are to be used;
- c) the measuring site shall be clear and unobstructed by trees or other obstacles.

6.2.2 In addition to the requirements specified in 6.2.1, the following points shall be taken into consideration when selecting the measuring site :

- a) degree of accessibility;
- b) the bed of the reach shall not be subject to changes during the period of measurement;
- c) irrespective of the flow, all discharges shall be

contained within a defined channel or channels having substantially stable boundaries, with well-defined geometrical dimensions;

d) the site shall be remote from any bend or natural or artificial obstruction if disturbance of the flow is likely to be caused thereby;

e) the gauging-site shall be kept clear of aquatic growth during the period of measurement;

f) sites at which vortices, backward flow, or dead water zones tend to develop shall be avoided;

g) measurement with converging, and more so with diverging, flow over an oblique measuring-section shall be avoided as it is difficult to allow for the systematic errors that can arise;

h) the orientation of the reach shall be such that the direction of flow is as closely as possible normal to that of the prevailing wind.

Where these requirements cannot be met (for instance, when in alluvial rivers the river-bed is changing during the period of measurement, or when, under flood conditions, the river is not confined to a single channel in embankments), a gauging-site shall be chosen such that the bed change and/or overflow is a minimum. Sites which are subject to variable backwater should be avoided if at all possible. Flood-plains, if they cannot be avoided, shall be of minimum width, as smooth as possible, without a distinct channel, and clear of bushes and trees.

In those instances where it is necessary to make measurements in the vicinity of a bridge, it is preferable that the measuring site be upstream of the bridge. However, in special cases and where accumulation of ice, logs or debris is liable to occur, it is preferable that the measuring site be downstream of the bridge.

NOTES

1 If, after the site has been selected, unacceptable changes occur in the channel conditions, another site shall be selected for the measurements.

2 In addition to the physical characteristics of the site, consideration must also be given to the personnel and equipment available to conduct the discharge measurements.

6.2.3 For streams subject to formation of ice cover the following conditions are also desirable in addition to those listed above :

a) The ice shall be strong enough to bear the weight of persons and their equipment for an acceptable proportion of the time that the stream is frozen; therefore, safe methods shall be used to determine the strength of the ice while it is forming, and particularly while it is melting.

b) The measuring site shall be chosen so that presence of slush or frazil ice at the site is minimized as there is a possibility of some unmeasurable flow through the slush layer. This means generally that measuring sites should be selected so that they are upstream, rather than downstream of reaches of open water.

c) The measuring site shall be chosen so that presence of many layers of ice is avoided. This phenomenon can occur at sites that are subject to many fluctuations in water level such as those downstream from hydroelectric projects. Layering effects also take place in small streams that freeze to the bottom.

Where these requirements cannot be met at an otherwise good gauging site, a different site may be used for winter measurement provided that there is negligible local inflow between the two sites. In some cases, it may be necessary to use more than one site for winter measurements. These alternate winter measurements sites should be evaluated during the open water season to assess their suitability with respect to 6.2.1 and 6.2.2.

6.3 Demarcation of site

The site, after selection, shall be provided with means for demarcation of the cross-section and for determination of the stage.

6.3.1 The position of each cross-section, normal to the mean direction of flow, shall be defined on the two banks by clearly visible and readily identifiable markers. Where a site is subject to considerable snow cover the section line markers may be referenced to other objects such as rock cairns.

6.3.2 The stage shall be read from a gauge at intervals throughout the period of measurement and the gauge datum shall be related by precise levelling to a standard datum.

6.3.3 An auxiliary gauge on the opposite bank shall be installed where there is likelihood of a difference in the level of water-surface between the two banks. This is particularly important in the case of very wide rivers. The mean of the measurements taken from the two gauges shall be used as the mean level of the water-surface and as a base for the cross-sectional profile of the stream.

7 MEASUREMENT OF CROSS-SECTIONAL AREA

The cross-sectional profile of the open channel at the gauging-site shall be determined by measuring, at the cross-section, the depth relative to the water-surface at a sufficient number of points to establish the shape of the bed.

The location of these points shall be determined by measuring their horizontal distance to a fixed reference point in the cross-section. In practice, these measurements determine the cross-sectional area of the individual segments between successive verticals where velocities are measured.

7.1 Measurement of widths

The measurements of the width of the channel and the widths of the individual segments may be obtained by measuring the distance from or to a fixed reference point

which shall be in the same vertical plane as the cross-section at the measuring site.

7.1.1 Where the width of the channel permits, or when the surface is covered by ice, these distances shall be measured by direct means, for example a steel tape or suitable marked wire, care being taken to apply the necessary corrections given in annex A. The intervals between the verticals, i.e. the widths of the segments, shall be similarly measured.

7.1.2 Where the channel is too wide for the above methods of measurement, the distance shall be determined by optical or electrical distance-meters, or by one of the surveying methods given in annex B.

7.2 Measurement of depth

7.2.1 Measurement of depth shall be made at intervals close enough to define the cross-sectional profile accurately. In general, the intervals shall not be greater than 1/15 of the width in the case of regular bed profiles, and shall not be greater than 1/20 of the width in the case of irregular bed profiles.

NOTE – For small channels with a regular bed profile, the number of intervals may be reduced. This may, however, affect the accuracy of the determination of the bed profile (see clause 10).

7.2.2 The depth shall be measured employing either sounding-rods or sounding-lines or other suitable devices. Where the channel is of sufficient depth, an echo-sounder may be used. If the velocity is high, it is preferable to use an echo-sounder or other device which will not require large corrections.

7.2.3 When a sounding-rod or sounding-line is used, at least two readings shall be taken at each point and the mean value adopted for calculations, unless the difference between the two values is more than 5 %, in which case two further readings shall be taken. If these are within 5 %, they shall be accepted for the measurement and the two earlier readings discarded. If they are again different by more than 5 %, no further readings shall be taken, but the average of all four readings shall be adopted for the measurement, noting that the accuracy of this measurement is reduced.

When an echo-sounder is used, the average of several readings should preferably always be taken at each point, and regular calibrations of the instrument are required under the same conditions of salinity and temperature of the water.

Where it is impracticable to take more than one reading of the depth, the error in measurement may be increased (see clause 10).

NOTES

1 Where measurements of the depths are made separately from the velocity measurements and the water level is not steady, water level shall be observed at the time of each measurement of depth. If this is not possible, the water-level shall be observed at intervals of 15 min and the value of the level at the time of each determination of depth shall be obtained by interpolation.

2 When, during the measurement of discharge, the bed profile changes appreciably, depth measurements shall be carried out by taking one depth reading at each point at the beginning and one at the end of the velocity measurement at each vertical, and the mean value of these two measurements shall be taken as the effective depth. Care must be exercised in taking repeated soundings to avoid disturbance of the bed.

3 Inaccuracies in soundings are most likely to occur owing to :

- a) the departure from the vertical of the sounding-rod or line, particularly in deep water, when the velocity is high;
- b) the penetration of the bed by the sounding weight or rod;
- c) the nature of the bed when an echo-sounder is used.

Errors due to a) may be minimized by the use, where practicable, of an echo-sounder, or pressure-measuring device. The effect of drag on a sounding-line may be reduced by using a streamlined lead weight at the end of a fine wire. A correction shall be applied to the wetted length of wire if the wire is not normal to the water-surface. It is recommended that the angle should not be greater than 30° (0,52 rad) in view of the inaccuracies involved. Methods of applying the correction are given in annex C.

Errors due to b) may be reduced by fitting a baseplate to the lower end of the sounding-rod, or by fastening a disk to the end of the sounding-line, provided they will not cause additional scour of fine bed material due to high velocities.

Errors due to c) may be reduced by selecting an echo-sounder frequency that most adequately depicts the bed-water interface.

4 In certain cases, for example floods, it may be impossible to determine an adequate profile of cross-section during the measurement. For those cases, the full profile shall be determined by surveying methods, either before or after the measurement, however, it should be recognized that this method is subject to errors due to possible erosion or deposition in the cross-section between the time the profile is determined and the time of measurement.

7.2.4 When an ice cover exists, it is necessary to compute the effective depth, i.e. the depth of water beneath the ice cover. The total depth is measured at holes cut in the ice using an ice chisel, chain saw or ice drill, then the distance from the water surface to the bottom of the ice layer measured using an L-shaped scale or similar device. The effective depth is computed by subtracting these two values. In those cases where a thick slush layer exists below the surface ice, the thickness is determined by lowering the meter through the slush until it turns freely, then raising the meter until the rotor stops. The distance from the water surface to this point is then subtracted from the overall depth of water.

8 MEASUREMENT OF VELOCITY

8.1 Measurement of velocity using current meters

8.1.1 Current meters

Current meters shall be constructed, calibrated and maintained to ISO 2537 and ISO 3455.

8.1.2 Measuring procedure

Velocity observations are normally made at the same time as measurements of the depth. This method shall be used in the case of unstable beds. Where, however, the two

measurements are made at different times, the velocity observations shall be taken at a sufficient number of places, and the horizontal distance between observations shall be measured as described in 7.1.1 and 7.1.2.

It is recommended that at least 20 verticals be used and that the discharge in any one segment does not exceed 10 % of the total. It is further recommended that the location of the verticals be selected after a previous cross-section survey. When the channel is sufficiently uniform it may be possible to allocate equal distance spacing between the verticals without conflicting with the above requirement.

NOTE — If conditions arise in which water runs both over and under the ice, the measurement of discharge shall be carried out in the two parts separated by the ice.

8.1.2.1 The current-meter shall be held in the desired position in each vertical by means of a wading-rod in the case of shallow channels, or by suspending it from a cable or rod from a bridge, trolley or boat in the case of deeper channels. When a boat is used, the current-meter shall be held so that it is not affected by disturbances of flow caused by the boat. After the current-meter has been placed at the selected point in the vertical, it shall be permitted to become adjusted to the flow before the readings are started.

NOTES

1 Care should be taken to ensure that the current-meter observations are not affected by random surface-waves and wind.

2 When a number of segments having sensibly the same flow of water are to be explored, a battery of current-meters fixed to the same rod can be used to measure corresponding velocities simultaneously, ensuring that there is no mutual interference.

3 If there is any appreciable deflection of the cable on which the meter is suspended, a correction shall be applied for the depth of the measuring-point. No generally applicable correction factor can be given, but it shall be determined by the user for the particular instrument and conditions of measurement. However the values given in annex C may serve as a guide.

8.1.2.2 The velocity at each selected point shall be observed by exposing the current meter for a minimum of 30 s. Where the velocity is subject to large periodic pulsations, the exposure time should be increased accordingly. (See ISO/DATA No. 2.)

8.1.2.3 The current-meter shall be removed from the water at intervals for examination, usually when passing from one vertical to another.

8.1.2.4 More than one current-meter may be used in determining velocities in the individual verticals, different current-meters being used for consecutive verticals. The averaging effect may reduce the systematic error of measurement.

8.1.2.5 In channels where the flow is unsteady, it is useful to correct for the variations in the total discharge during the period of the measurement not only by observing the change in stage, but also by continuously measuring the velocity at some conveniently chosen point. Experience has shown that, provided that variations in the discharge

are small, the velocity distribution is not modified significantly. A reference current-meter may be positioned in the main current and the velocity at this point measured, if possible, at the same time as each local point velocity measurement in the cross-section is made. All the individual measurements during the test may then be referred to the corresponding reference reading. The *mean reference velocity*, defined as the average of all the readings of the reference current-meter, can be calculated precisely. Each reading of the local point velocity can then be corrected by multiplying by the ratio of the mean reference velocity to the reference velocity reading at the instant being considered. If the reference current-meter measurements are not made at the same time as the individual measurements, they shall be taken at regular intervals as frequently as possible throughout the measurement and the reference reading appropriate to a local point velocity measurement obtained by interpolation.

8.1.2.6 When velocity observations are made from ice cover, the meter may be suspended from rods or from a cable. In both cases a specially modified meter having no tail fin assembly may be used; furthermore, in the case of cable suspension, a special winter weight assembly may be used. The purpose of these changes is to permit the meter to be lowered through the hole drilled by an ice auger, usually 150 to 200 mm in diameter.

In moving the meter from one measuring vertical to another, care must be taken to ensure that the meter is exposed to air temperatures for as short a time as possible in order to prevent formation of ice on moving parts. If ice does form, the meter should be soaked for a few minutes before commencing the count. When air temperatures are very low, use of a hot water bath or heated air compartment will prevent rime ice formation when moving from one vertical to the next.

NOTES

1 Some vertical axis current meters having vanes rather than cups have been produced for measuring velocities under slush or frazil ice conditions.

2 Some winter weight assemblies are unstable under high velocity conditions. The user should ensure that the assembly used is appropriate to the stream conditions.

8.1.3 *Oblique flow*

If oblique flow is unavoidable, the angle of the direction of the flow to the perpendicular to the cross-section shall be measured and the measured velocity corrected. Special instruments have been developed for measuring the angle and velocity at a point simultaneously. Where, however, these are not available and there is insignificant wind, the angle of flow throughout the vertical may be taken to be the same as that observed on the surface. If the channel is very deep, or if the local bed profile is changing rapidly, this assumption shall not be accepted without checking.

If the measured angle to the perpendicular is γ , then

$$v_{\text{corrected}} = v_{\text{measured}} \cos \gamma$$

NOTE — Some propeller type current meters can be equipped with a propeller having a cosine response. This correction is therefore not necessary provided the meter is held perpendicular to the measuring section and the angle γ is less than about 30° (0,52 rad).

8.1.4 *Method for mean velocity measurement in each vertical*

The mean velocity of the water in each vertical can be determined by any of the following methods, depending on the time available and having regard to the width and depth of the water, to the bed conditions, and to changing stage and whether there is ice-cover, as well as to the accuracy which is to be obtained :

- a) Velocity-distribution method (see 8.1.4.1).
- b) Reduced-point methods (see 8.1.4.2).
- c) Integration method (see 8.1.4.3).
- d) Other methods (see 8.1.4.4).

In the vicinity of the minimum speed of response, the uncertainty in determining the velocity is high. With current-meters manufactured according to ISO 2537, the minimum velocity for reliable measurements is 0,15 m/s, but circumstances may necessitate their use below this velocity.

The horizontal axis of the current-meter shall not be situated at a distance less than one and a half times the rotor height from the water-surface, nor shall it be at a distance less than three times the rotor height from the bottom of the channel. Furthermore, no part of the meter shall break the surface of the water.

8.1.4.1 VELOCITY DISTRIBUTION METHOD

The measurement of the mean velocity by this method is obtained from velocity observations made at a number of points along each vertical between the surface of the water and the bed of the channel. The spacing of the points shall be so chosen that the difference of velocity between the two adjacent points is not more than 20 % with respect to the higher value of the two. The top and bottom points shall be located respectively near to the water-surface and bed of the channel taking into account the specification of 8.1.4. (See ISO 1088.) The velocity observations at each position shall be plotted in graphical form and the mean velocity determined with the aid of a planimeter, digitizer or equivalent method.

NOTES

1 This method may not be suitable for routine discharge measurements because the apparent gain in precision may be more than offset by errors resulting from change of stage during the long period of time needed for making the measurement.

2 The velocity curve can be extrapolated from the last measuring point to the bed or wall by calculating v_x from the equation

$$v_x = v_a \left(\frac{x}{a} \right)^{1/m}$$

where

v_x is the point velocity in the extrapolated zone at a distance x from the bed;

v_a is the velocity at the last measuring point at a distance a from the bed.

The mean velocity v_x between the bottom (or a vertical side) of the channel and the nearest point of measurement (where the measured velocity is v_a) can be calculated directly from the equation.

$$\bar{v}_x = \frac{m}{m+1} v_a$$

Generally, m varies between 5 (for coarse sides) and 7 (for smooth sides).

3 An alternative method of obtaining the velocity in the region beyond the last measuring-point is based on the assumption that the velocity for some distance up from the bed of the channel is proportional to the logarithm of the distance x from that boundary. If the observed velocities at points approaching the bed are plotted against $\log x$, then the best-fitting straight line through these points can be extended to the boundary. The velocities close to the boundary can then be read from the graph.

8.1.4.2 REDUCED POINT METHODS

a) Two-point method

Velocity observations shall be made at each vertical by exposing the current-meter at 0,2 and 0,8 of the depth below the surface. The average of the two values shall be taken as the mean velocity in the vertical.

NOTE – This method is applicable without correction for depths greater than 1 m where measurements are made under ice-cover.

b) One-point method

Velocity observations shall be made at each vertical by exposing the current-meter at 0,6 of the depth below the surface. The value observed shall be taken as the mean velocity in the vertical.

NOTE – This method is applicable with correction for depths shallower than 1 m where measurements are made under ice-cover, the correction factor being taken as 0,92. Also a measurement may be made at 0,5 of the depth under ice-cover, a correction factor of 0,88 being applied.

8.1.4.3 INTEGRATION METHOD

In this method, the current-meter is lowered and raised through the entire depth at each vertical at a uniform rate. The speed at which the meter is lowered or raised shall not be more than 5 % of the mean velocity of flow in the cross-section, and in any case it shall not be greater than 0,04 m/s. Two complete cycles are made in each vertical and, if the results differ by more than 10 %, the measurement is repeated.

For calculating the mean velocity in the vertical, the average number of revolutions per second is determined and this incorporated in the formula for the current-meter calibration coefficient. The error introduced by using the normal meter calibration coefficient for measurement near the bed of the channel is not significant, provided that the current-meter is not allowed to remain in its lowest position for any appreciable length of time. This method is used only in water having a depth greater than 1 m.

8.1.4.4 OTHER METHODS

a) Six-point method

This method may be used in difficult conditions, for instance where there is aquatic growth or where there is a covering of ice. Velocity observations are made by exposing the current-meter on each vertical at 0,2 – 0,4 – 0,6 and 0,8 of the depth below the surface and as near as possible to the surface and the bottom according to the requirements of 8.1.4. The velocity observations at each point are plotted in graphical form and the mean velocity determined with the aid of a planimeter.

Alternatively, the mean velocity may be found algebraically from the equation

$$\bar{v} = 0,1 (v_{\text{surface}} + 2 v_{0,2} + 2 v_{0,4} + 2 v_{0,6} + 2 v_{0,8} + v_{\text{bed}})$$

b) Five-point method

When the channel is free from ice and aquatic growth, a reduced point method is to measure on each vertical at 0,2 – 0,6 and 0,8 of the depth below the surface and as near as possible to the surface and the bottom. The mean velocity may be determined from a graphical plot of the velocity profile with a planimeter, or from the equation.

$$\bar{v} = 0,1 (v_{\text{surface}} + 3 v_{0,2} + 3 v_{0,6} + 2 v_{0,8} + v_{\text{bed}})$$

c) Three-point method

Velocity observations are made by exposing the current-meter at each vertical at 0,2 – 0,6 and 0,8 of the depth below the surface. The average of the three values may be taken as the mean velocity in the vertical.

Alternatively, the 0,6 measurement may be weighted and the mean velocity obtained from the equation

$$\bar{v} = 0,25 (v_{0,2} + 2 v_{0,6} + v_{0,8})$$

When there is a covering of ice, measurements may be made at 0,15 – 0,5 and 0,85 of the depth below the surface, and the mean velocity obtained as the average of these measurements.

d) Alternative one-point method

Velocity observations shall be made at each vertical by exposing the current-meter at 0,5 of the depth below the surface. The values observed, multiplied by a

coefficient shall be taken as the mean velocity in the vertical. This coefficient shall be verified by analysis using the velocity-distribution method, but is approximately 0,95.

NOTE — This method is applicable with correction for depths shallower than 1 m where measurements are made under ice-cover, the correction factor being taken as 0,88 [see 8.1.4.2 b)].

e) Surface one-point method

In flashy or other conditions where the above methods are not feasible, velocity shall be measured at one point just below the surface. The depth of submergence of the current-meter shall be uniform over all the verticals; and care shall be taken to ensure that the current-meter observations are not affected by random surface-waves and wind. This "surface" velocity may be converted to the mean velocity in the vertical by multiplying it by a predetermined coefficient specific to the section and to the discharge.

The coefficient shall be computed for all stages by correlating the "surface" velocity with the velocity at 0,6 depth or, where greater accuracy is desired, with the mean velocity obtained by the integration method.

Where it is not possible to check the coefficient directly, it may be noted for guidance that, in general, the coefficient varies between 0,84 and 0,90 depending upon the shape of the velocity profile. The higher values between 0,88 and 0,90 are usually obtained when the bed is smooth but values outside this range may occur under special conditions.

8.1.5 Errors and limitations

Estimates of the possible errors that may occur when using the various methods detailed in 8.1.4 are given in clause 9. It should be noted that these estimates are of possible random errors which may occur even when all the precautions noted earlier and below are observed. If the measurement is not made under these best conditions, an additional uncertainty must be included when estimating the overall accuracy of the measurement.

Errors may arise

- a) if the flow is unsteady and if material in suspension interferes with the rotation of the current-meter;
- b) if the direction of flow is not parallel to the axis of the propeller-type current meter, or is oblique to the plane of the cup-type meter, and if the appropriate correction factors are not known accurately;
- c) if the current-meter is used for measurement of velocity outside the range established by the calibration;
- d) if the set-up for measurement (such as rods or cable suspending the current-meter, the boat, etc.) is different from that used during the calibration of the current-meter, in which case a systematic error may be introduced;

e) if there is a significant disturbance of the water-surface by wind;

f) if the current-meter is not held steadily in the correct place during the measurement, which is the case when the boat is drifting (see annex D), or when an oscillating transverse movement occurs. In the latter case, the resultant of the flow velocity and the transverse velocity is measured, which at high transverse velocities gives rise to serious positive errors.

8.2 Measurement of velocity using floats

This method shall only be used when it is impossible to employ a current-meter because of excessive velocities and depths, or because of the presence of material in suspension, or where velocities are too low for current-meter measurement.

8.2.1 Selection of site

Three cross-sections shall be selected along the reach of the channel as described in clause 6, at the beginning, midway and at the end of the reach. The cross-sections shall be far enough apart for the time which the floats take to pass from one cross-section to the next to be measured accurately. The midway cross-section shall be used only for the purposes of checking the velocity measurement between the cross-sections at the beginning and at the end of the reach. A minimum duration of float movement of 20 s is recommended.

8.2.2 Measuring procedure

The float shall be released far enough above the upper cross-section to attain a constant velocity before reaching the first cross-section. The time at which the float passes each of the three cross-sections is then noted. This procedure shall be repeated with the floats at various distances from the bank of the river. The distances of the float from the bank as it passes each cross-section may be determined by suitable optical means, for example, a theodolite.

Increasing the number of floats used to determine the velocity in each segment will improve the accuracy of the measurement.

The width of the channel shall be divided into a certain number of segments of equal width. If, however, the channel is very irregular, each segment shall have approximately the same discharge. The number of segments shall not be less than three, but where possible a minimum of five shall be used, the actual number of segments depending on the time available for these observations at the particular stage of the river.

8.2.3 Types of float

The velocity of the water in each segment can be determined by

- a) surface-floats;

- b) double floats;
- c) other types of floats.

NOTE — Separately flowing blocks of ice, provided they are small, can be used as surface-floats during ice drifting.

The coefficients for obtaining the mean velocity from the measurements from the various types of floats are given in 8.2.4.

8.2.3.1 SURFACE FLOATS

These may be used during floods when velocity measurements are to be made quickly. They shall not be used when their movement is likely to be affected by winds.

8.2.3.2 DOUBLE FLOATS

These may be used for measurements of velocities in deep rivers. The sub-surface body may be positioned at 0,6 of the depth below the surface, or at other depths to obtain direct velocity measurements at these depths (for example those given in 8.1.4).

8.2.3.3 OTHER TYPES OF FLOAT

Other methods of obtaining the mean velocity in each segment may be used if the bed profile is regular over the measuring reach :

- a) Sub-surface floats

These may be used for measurement of velocities in very deep rivers. The length of the sub-surface float, sometimes called the "multiple float", which consists of separate elements suitably attached together to permit flexibility and supported by a surface-float, shall be approximately equal to the water depth, but the float shall in no case touch the bottom.

- b) Velocity-rods

These may be used for measurement of velocities in the case of artificial or other regular channels where the cross-section is uniform, the bed is free from weeds, and the depth of the water is constant. The velocity-rod (sometimes called a float-rod) shall be at least 0,95 of the depth of the channel but shall not touch the bottom.

8.2.4 Evaluation of velocity

The float velocity shall be determined by dividing the distance between the cross-sections by the time taken by the float to travel this distance. Several readings of the float velocities shall be taken and the mean of these readings shall be multiplied by the appropriate coefficient to obtain the mean velocity in the segment. The coefficient derived from current-meter measurements at the site at a stage as near as possible to that during the float measurement may be used for converting the float velocity to mean velocity.

It is evident that this method necessarily gives an approximation of the flow rate.

8.2.4.1 SURFACE-FLOATS

Where it is not possible to check the coefficient directly, it may be noted for guidance that in general the coefficient of the surface-float varies between 0,84 and 0,90 depending upon the shape of the velocity profile. The higher values are usually obtained when the bed is smooth, but values outside this range may occur under special conditions.

8.2.4.2 DOUBLE FLOATS

Where it is not possible to check the coefficient directly, it may be noted for guidance that when the sub-surface body is situated at 0,6 of the depth, the coefficient is approximately equal to 1,0 and at 0,5 of the depth, the coefficient is approximately equal to 0,96.

8.2.4.3 OTHER TYPES OF FLOAT

Where a direct check on the coefficient is not possible, it may be noted that the coefficient of the sub-surface floats and velocity-rods varies in general over the range 0,8 to 1,0.

8.2.5 Main sources of error

Errors may occur during the measurement of discharge by floats and the main sources are listed below. They shall be taken into consideration when estimating the overall error as given in clause 10.

Errors may arise :

- a) if the coefficient from which the mean velocity is obtained from the float velocity is not known accurately;
- b) if too few segments are used for the velocity distribution;
- c) if a sub-surface float or velocity-rod is used and the depth of the channel is not uniform throughout the measuring-reach;
- d) if the float does not travel in the centre of the panel due to oblique currents;
- e) if there is wind, but it should be noted that this error is generally negligible in comparison with others listed above.

9 COMPUTATION OF DISCHARGE

9.1 General

The determination of the mean velocity in each vertical has been dealt with in 8.1 and 8.2. In 9.2 and 9.3, the determination of the discharge from the current-meter measurements and float measurements is given. The methods of determination by current-meters given in 9.2.1 and 9.2.2 are those most generally used, that given in 9.2.2 being particularly useful for computations carried out in the field. The methods given in 9.2.3 and 9.2.4 are applicable for special conditions; for example the method given in 9.2.4 is suitable when the channel is of rectangular cross-section.

9.2 Determination of discharge from current-meter measurements

9.2.1 Graphical method (depth-velocity integration or mid-section method)

The value of the product of the mean velocity \bar{v} at each vertical and the corresponding depth, i.e. $\bar{v}d$, shall be plotted over the water-surface line and a curve drawn through the $\bar{v}d$ points as shown in figure 1.

When velocity measurements are not carried out on the same verticals on which the depth measurements are made, the \bar{v} curve shall be plotted across the width of the stream and the value of \bar{v} corresponding to the verticals where depth measurements are made shall be taken for plotting the $\bar{v}d$ curve.

The area enclosed between this $\bar{v}d$ curve and the water-surface line represents the discharge of the cross-section.

9.2.2 Arithmetical methods

9.2.2.1 MEAN-SECTION METHOD

The cross-section is regarded as being made up of a number of segments, each bounded by two adjacent verticals

If \bar{v}_1 and \bar{v}_2 are the mean velocities at the first and second verticals respectively, if d_1 and d_2 are the total depths measured at verticals 1 and 2 respectively, and if b is the

horizontal interval between the said verticals, the discharge of a segment is taken to be :


$$q = \left(\frac{\bar{v}_1 + \bar{v}_2}{2} \right) \left(\frac{d_1 + d_2}{2} \right) b$$

This is repeated for each segment and the total discharge is obtained by adding the discharge from each segment.

NOTE – The additional discharge in the segments between the bank and vertical 1, and between vertical m and the other bank, can be estimated from the above equation and on the assumption that the velocity and depth at the banks are zero. If, however, this discharge is a significant proportion of the total flow, then the equation given in note 2 of 8.1.4.1 can be used to obtain the mean velocity in the region of the bank.

9.2.2.2 MID-SECTION METHOD

Assuming a straight-line variation of $\bar{v}d$, the discharge in each segment shall be computed by multiplying $\bar{v}d$ by the corresponding width measured along the water-surface line. This width shall be taken to be the sum of half the width from the adjacent vertical to the vertical for which $\bar{v}d$ has been calculated plus half the width from this vertical to the corresponding adjacent vertical on the other side. The value for $\bar{v}d$ in the two half-widths next to the banks may be taken as zero.

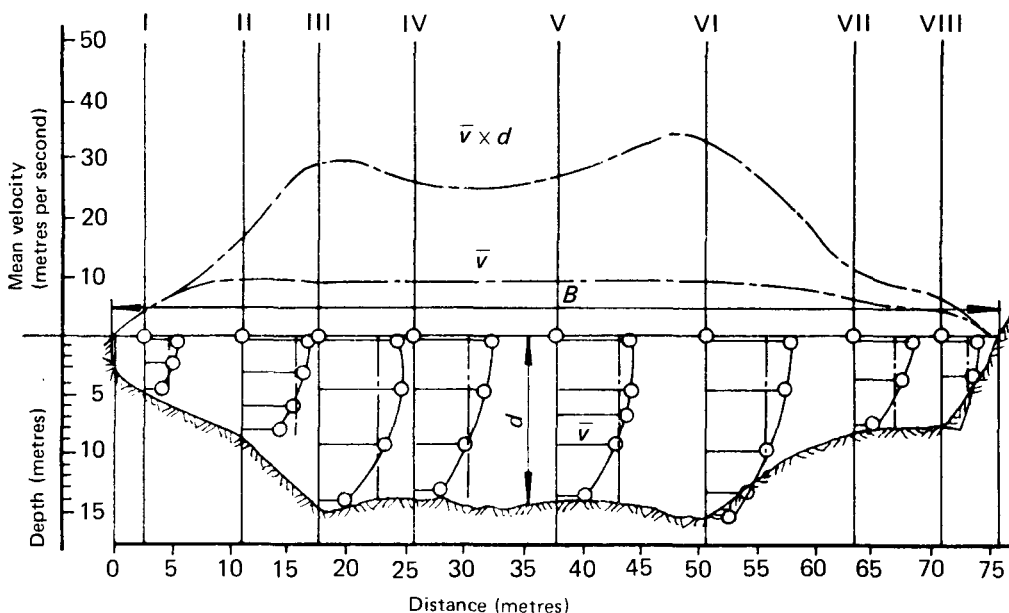

$$Q = \int_0^B \bar{v}d \Delta B$$

FIGURE 1 – Computation of discharge from current-meter measurement – Depth-velocity integration method