
**Identification cards — Recording
technique —**

**Part 6:
Magnetic stripe — High coercivity**

Cartes d'identification — Technique d'enregistrement —

Partie 6: Bandeau magnétique — Haute coercitivité

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

ISO/IEC 7811-6:2008

<https://standards.iteh.ai/catalog/standards/sist/72b8bfec-634e-479c-81b3-b421a21f05af/iso-iec-7811-6-2008>

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 7811-6:2008](https://standards.iteh.ai/catalog/standards/sist/72b8bfec-634e-479c-81b3-b421a21f05af/iso-iec-7811-6-2008)

<https://standards.iteh.ai/catalog/standards/sist/72b8bfec-634e-479c-81b3-b421a21f05af/iso-iec-7811-6-2008>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Foreword.....	v
1 Scope	1
2 Conformance	1
3 Normative references	1
4 Terms and definitions	2
5 Physical characteristics of the identification card	4
5.1 Magnetic stripe area warpage	4
5.2 Surface distortions	4
6 Physical characteristics of the magnetic stripe	5
6.1 Height and surface profile of the magnetic stripe area	5
6.1.1 Surface profile of the magnetic stripe area	5
6.1.2 Height of the magnetic stripe area	7
6.2 Surface roughness	7
6.3 Adhesion of stripe to card	7
6.4 Wear of magnetic stripe from read/write head	7
6.5 Resistance to chemicals	7
7 Performance characteristics for the magnetic material	7
7.1 General	7
7.2 Testing and operating environment	8
7.3 Signal amplitude requirements for magnetic media	8
8 Encoding technique	10
9 Encoding specification, general	11
9.1 Angle of recording	11
9.2 Nominal bit density	11
9.3 Signal amplitude requirements for tracks 1, 2 and 3	11
9.4 Bit configuration	12
9.5 Direction of recording	12
9.6 Leading and trailing zeroes	12
10 Encoding specifications	13
10.1 Alphanumeric track, track 1	13
10.1.1 Average bit density	13
10.1.2 Flux transition spacing variation	13
10.1.3 Coded character set	14
10.1.4 Maximum number of characters for ID-1 type card	16
10.2 Numeric track, Track 2	16
10.2.1 Average bit density	16
10.2.2 Flux transition spacing variation	16
10.2.3 Coded character set	17
10.2.4 Maximum number of characters for ID-1 type card	17
10.3 Numeric track, Track 3	17
10.3.1 Average bit density	17
10.3.2 Flux transition spacing variation	17
10.3.3 Coded character set	17
10.3.4 Maximum number of characters for ID-1 type card	18
11 Error detection	18
11.1 Parity	18
11.2 Longitudinal redundancy check (LRC)	18

12	Location of encoded tracks	18
Annex A	(informative) Read compatibility of magnetic stripes (ISO/IEC 7811-2 and ISO/IEC 7811-6)	20
Annex B	(normative) Signal amplitude measurements	21
Annex C	(informative) Magnetic stripe abrasivity	22
Annex D	(informative) Static magnetic characteristics	23

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 7811-6:2008](https://standards.iteh.ai/catalog/standards/sist/72b8bfec-634e-479c-81b3-b421a21f05af/iso-iec-7811-6-2008)

<https://standards.iteh.ai/catalog/standards/sist/72b8bfec-634e-479c-81b3-b421a21f05af/iso-iec-7811-6-2008>

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 7811-6 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

This third edition cancels and replaces the second edition (ISO/IEC 7811-6:2001). It also incorporates the Amendment ISO/IEC 7811-6:2001/Amd.1:2005. The major changes from the second edition are as follows.

- Wherever possible, the same definitions, criteria and test methods are used in ISO/IEC 7811-2 and ISO/IEC 7811-6.
- The algorithm defined in Figure 7 of ISO/IEC 7811-6:2001 has been changed to produce more consistent results (incorporated from ISO/IEC 7811-6:2001/Amd.1:2005).

NOTE The requirements given in ISO/IEC 7811-4:1995 and ISO/IEC 7811-5:1995 were moved to Part 6 in the second edition.

Notes in this part of ISO/IEC 7811 are only used for giving additional information intended to assist in the understanding or use of the document. They do not contain provisions or requirements to which it is necessary to conform in order to claim compliance with this part of ISO/IEC 7811.

ISO/IEC 7811 consists of the following parts, under the general title *Identification cards — Recording technique*:

- *Part 1: Embossing*
- *Part 2: Magnetic stripe — Low coercivity*
- *Part 6: Magnetic stripe — High coercivity*
- *Part 7: Magnetic stripe — High coercivity, high density*
- *Part 8: Magnetic stripe — Coercivity of 51,7 kA/m (650 Oe)*
- *Part 9: Tactile identifier mark*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 7811-6:2008](https://standards.iteh.ai/catalog/standards/sist/72b8bfec-634e-479c-81b3-b421a21f05af/iso-iec-7811-6-2008)

<https://standards.iteh.ai/catalog/standards/sist/72b8bfec-634e-479c-81b3-b421a21f05af/iso-iec-7811-6-2008>

Identification cards — Recording technique —

Part 6: Magnetic stripe — High coercivity

1 Scope

ISO/IEC 7811 defines the characteristics for identification cards as defined in Clause 4 of this part of ISO/IEC 7811 and the use of such cards for international interchange.

This part of ISO/IEC 7811 specifies requirements for a high coercivity magnetic stripe (including any protective overlay) on an identification card, the encoding technique and coded character sets. It takes into consideration both human and machine aspects and states minimum requirements.

Coercivity influences many of the quantities specified in this part of ISO/IEC 7811 but is not itself specified. The main characteristic of the high coercivity magnetic stripe is its improved resistance to erasure. This is achieved with minimal probability of damage to other magnetic stripes by contact while retaining read compatibility with magnetic stripes as defined in ISO/IEC 7811-2.

ISO/IEC 7811 provides criteria to which cards are to perform. No consideration is given within ISO/IEC 7811 to the amount of use, if any, experienced by the card prior to test. Failure to conform to specified criteria should be negotiated between the involved parties.

ISO/IEC 10373-2 specifies the test procedures used to check cards against the parameters specified in this part of ISO/IEC 7811.

NOTE Numeric values in the SI and/or Imperial measurement system in this part of ISO/IEC 7811 may have been rounded off and therefore are consistent with, but not exactly equal to, each other. Either system may be used, but the two should not be intermixed or reconverted. The original design was made using the Imperial measurement system.

2 Conformance

A prerequisite for conformance with this part of ISO/IEC 7811 is conformance with ISO/IEC 7810. An identification card is in conformance with this part of ISO/IEC 7811 if it meets all mandatory requirements specified herein. Default values apply if no others are specified.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 4287, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Terms, definitions and surface texture parameters*

ISO/IEC 7810, *Identification cards — Physical characteristics*

ISO/IEC 10373-1, *Identification cards — Test methods — Part 1: General characteristics*

ISO/IEC 10373-2, *Identification cards — Test methods — Part 2: Cards with magnetic stripes*

4 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 7810 and the following apply.

4.1 primary standard
set of reference cards established and maintained by the Physikalisch-Technische Bundesanstalt (PTB) that represent the values of U_R and I_R designated RM7811-6

4.2 secondary standard
reference card designated RM7811-6 that is related to the primary standard as stated in the calibration certificate supplied with each card

NOTE Secondary standards can be ordered from Q-Card, 301 Reagan Street, Sunbury, PA 17801, USA. The source of secondary standards will be maintained at least until 2010.

4.3 unused un-encoded card
card possessing all the components required for its intended purpose, which has not been subjected to any personalization or testing operation and which has been stored in a clean environment with no more than 48 h exposure to daylight and at temperatures between 5 °C and 30 °C and humidity between 10 % and 90 % without experiencing thermal shock

4.4 unused encoded card
card according to 4.3 that has only been encoded with all the data required for its intended purpose (e.g. magnetic encoding, embossing, electronic encoding)

4.5 returned card
card according to 4.4 after it has been issued to the card holder and returned for the purpose of testing

4.6 flux transition
location of the greatest rate of change with distance of the magnetisation

4.7 reference current
 I_R
minimum recorded current amplitude under the given test conditions that causes, on the reference card, a readback signal amplitude equal to 80 % of the reference signal amplitude U_R , at a density of 8 flux transitions per millimetre (200 flux transitions per inch) as shown in Figure 6

4.8 reference flux level
 F_R
flux level in the test head that corresponds to the reference current I_R

4.9**test recording currents**

two recording currents defined by:

I_{\min} = recording current corresponding to $2,8 F_R$

I_{\max} = recording current corresponding to $3,5 F_R$

4.10**individual signal amplitude**

U_i

base-to-peak amplitude of a single readback voltage signal

4.11**average signal amplitude**

U_A

sum of the absolute value of the amplitude of each signal peak (U_i) divided by the number of signal peaks (n) for a given track over the length of the magnetic stripe area

4.12**reference signal amplitude**

U_R

maximum value of the average signal amplitude of a reference card corrected to the primary standard

4.13**physical recording density**

number of flux transitions per unit length recorded on a track

4.14**bit density**

number of data bits stored per unit of length (bits/mm or bpi)

4.15**bit cell**

distance between two clocking flux transitions

NOTE See Figure 11.

4.16**subinterval**

distance that is nominally half of the distance between two clocking flux transitions

NOTE See Figure 11.

4.17**demagnetisation current**

I_d

D.C. current value that reduces the average signal amplitude to 80 % of the reference signal amplitude (U_R) on a secondary reference card that has been encoded at a density of 20 ft/mm (500 fpi) at a current of I_{\min}

iTeh STANDARD PREVIEW

(standards.iteh.ai)

ISO/IEC 7811-6:2008

<https://standards.iteh.ai/catalog/standards/sist/72b8bfec-634e-479c-81b3-6421e2105a/iso-iec-7811-6-2008>

5 Physical characteristics of the identification card

The identification card shall conform to the specification given in ISO/IEC 7810.

WARNING — The attention of card issuers is drawn to the fact that information held on the magnetic stripe may be rendered ineffective through contamination by contact with dirt and certain commonly used chemicals including plasticizers. It should also be noted that any printing or screening placed on top of the magnetic stripe must not impair the function of the magnetic stripe.

5.1 Magnetic stripe area warpage

Application of a 2,2 N (0.5 lbf) load evenly distributed on the front face opposite the magnetic stripe shall bring the entire stripe within 0,08 mm (0.003 in) of the rigid plate.

5.2 Surface distortions

There shall be no surface distortions, irregularities or raised areas on both the front and the back of the card in the area shown in Figure 1 that might interfere with the contact between the magnetic head and magnetic stripe.

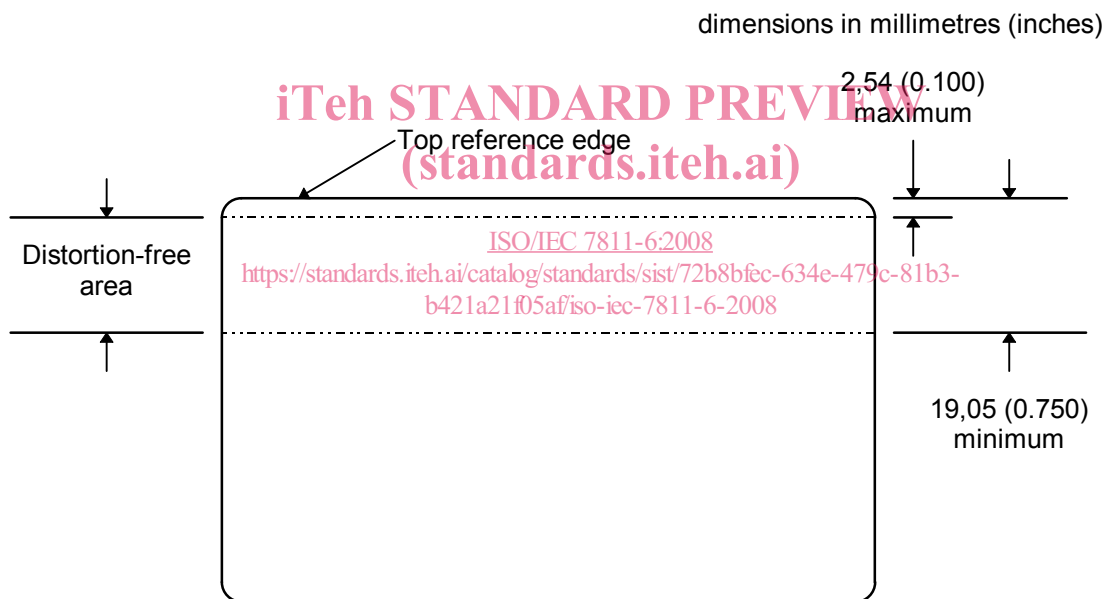


Figure 1 — Distortion-free area on card with magnetic stripe


If a raised signature panel area is located on the front or back of the card, then it shall be no closer to the top edge of the card than 19,05 mm (0.750 in).

NOTE Raised areas and distortions on other areas of the card may cause card transport problems with magnetic stripe processing equipment resulting in reading or writing errors.

6 Physical characteristics of the magnetic stripe

6.1 Height and surface profile of the magnetic stripe area

The magnetic stripe area is located on the back of the card as shown in Figure 2.

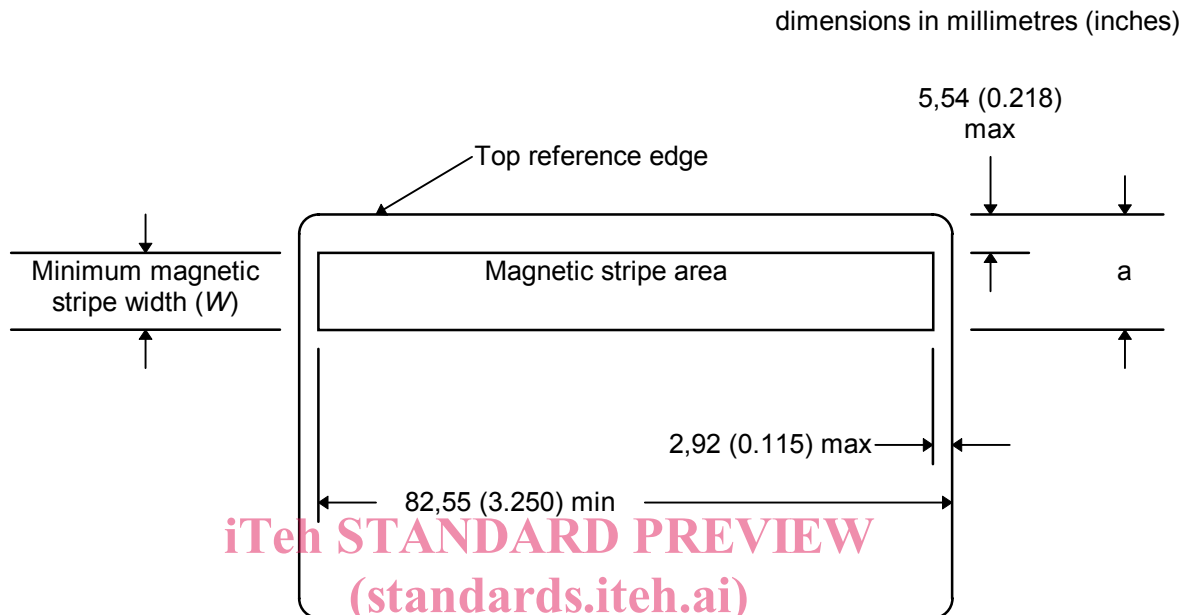

For use of tracks 1 and 2: $a = 11,89 (0.468) \text{ min}$

For use of tracks 1, 2, and 3: $a = 15,95 (0.628) \text{ min}$

<https://standards.iteh.ai/catalog/standards/sist/72b8b1ec-634e-479c-81b3-b421a21f05af/iso-iec-7811-6-2008>

NOTE In the case of the magnetic stripe area used for track 1 and 2, the dimension a as shown in Figure 2 of the magnetic media could be less than the maximum dimension b as shown in Figure 12 for the location of track 2 data on the card. It is desirable that the magnetic stripe area extend beyond the limits of the encoded track.

Figure 2 — Location of magnetic material for ID-1 type card

6.1.1 Surface profile of the magnetic stripe area


The maximum vertical deviation (a) of the transverse surface profile of the magnetic stripe area is shown below. See Figure 3, Figure 4, and Figure 5. The slope of the surface profile curve shall be limited to: $-4a/W < \text{slope} < 4a/W$.

When the bending stiffness value (see ISO/IEC 7810) for the card is 20 mm or more then the surface profile limits are:

Minimum stripe width	As shown in Figure 3A	As shown in Figure 3B
$W = 6,35 \text{ mm} (0.25 \text{ in})$	$a \leq 9,5 \text{ } \mu\text{m} (375 \text{ } \mu\text{in})$	$a \leq 5,8 \text{ } \mu\text{m} (225 \text{ } \mu\text{in})$
$W = 10,28 \text{ mm} (0.405 \text{ in})$	$a \leq 15,4 \text{ } \mu\text{m} (607 \text{ } \mu\text{in})$	$a \leq 9,3 \text{ } \mu\text{m} (365 \text{ } \mu\text{in})$

When the bending stiffness value (see ISO/IEC 7810) for the card is less than 20 mm then the surface profile limits are:

Minimum stripe width	As shown in Figure 3A	As shown in Figure 3B
$W = 6,35 \text{ mm (0.25 in)}$	$a \leq 7,3 \text{ } \mu\text{m (288 } \mu\text{in)}$	$a \leq 4,5 \text{ } \mu\text{m (175 } \mu\text{in)}$
$W = 10,28 \text{ mm (0.405 in)}$	$a \leq 11,7 \text{ } \mu\text{m (466 } \mu\text{in)}$	$a \leq 7,3 \text{ } \mu\text{m (284 } \mu\text{in)}$

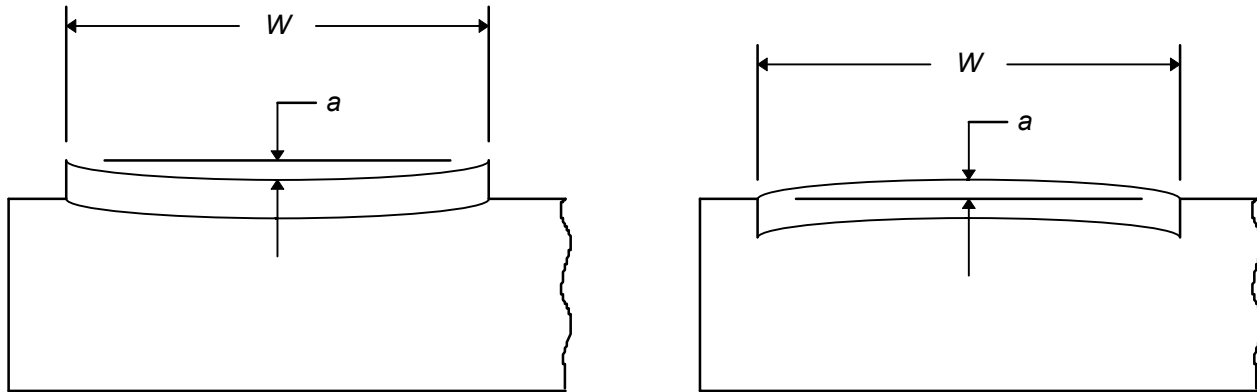

A iTeh STANDARD PREVIEW B
(standards.iteh.ai)

Figure 3 — Surface profile

ISO/IEC 7811-6:2008

<https://standards.iteh.ai/catalog/standards/sist/72b8bfec-634e-479c-81b3-b421a21f05af/iso-iec-7811-6-2008>

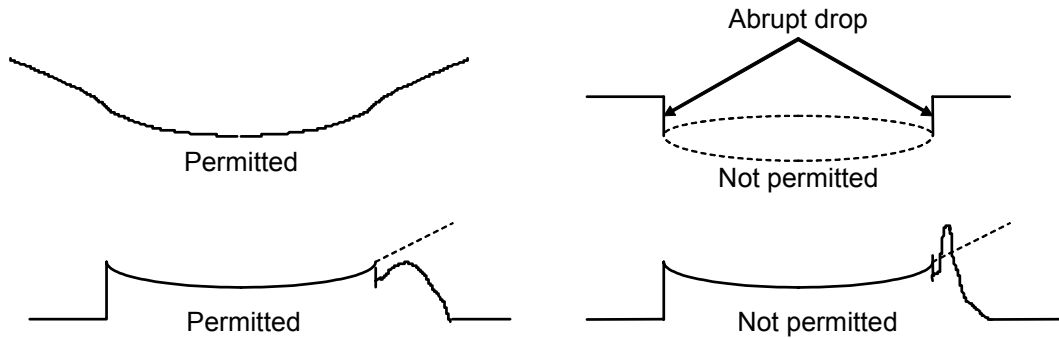


Figure 4 — Surface profile examples



Irregular profiles as shown may result in poor quality encoding.

Figure 5 — Irregular surface profile examples