

ETSI TS 103 328 V1.2.1 (2016-10)



Railways Telecommunications (RT); GPRS/EGPRS requirements for European Train Control System (ETCS)

iTeh Standards PREVIEW
(standards.iteh.ai)
Full standards catalog: <https://standards.iteh.ai/catalog/standards/3ba513d5-fdb3-4b3e-9795-6ffe75401e82/etsi-103-328-v1-2-1-2016-10>
10

Reference

RTS/RT-0046

Keywords

GSM-R, radio, railways

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2016.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Modal verbs terminology.....	4
Foreword.....	4
Introduction	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	7
3 Definitions and abbreviations.....	7
3.1 Definitions.....	7
3.2 Abbreviations	7
4 General requirements	8
4.1 ETCS application characteristics.....	8
4.2 Coexistence between ETCS and non-ETCS applications.....	8
4.3 Reference 3GPP Release	9
4.4 Applicability.....	9
5 Bearer services and features for ETCS operation.....	9
5.1 Basic features	9
5.1.0 General.....	9
5.1.1 Network - Bearer Service capabilities	9
5.1.2 Mobile - Bearer Service capabilities.....	10
5.1.3 Quality of Service Management	11
5.1.4 Multislot Operation.....	11
5.1.5 Optimized LLC-PDU delivery.....	11
5.1.6 Mobility	11
5.1.7 Gathering radio resources	12
5.1.8 Radio resource allocation.....	12
5.1.9 Automatic GPRS Attach.....	12
5.1.10 Summary basic features	12
5.2 Mixed packet data traffic operation.....	14
5.2.0 General.....	14
5.2.1 Quality of Service Management	14
5.2.2 Summary mixed packet data traffic operation	14
Annex A (informative): Bibliography.....	15
Annex B (informative): Change History	16
History	17

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Railway Telecommunications (RT).

Introduction

Railway undertakings are facing the challenge to evolve their networks to support the ETCS operation in high density railway traffic areas. The limited GSM-R spectrum resources put additional pressure on air interface traffic capabilities and as well radio spectrum efficiency. Also, the continuous development of further voice services e.g. GSM-R based shunting communication using circuit switched technology requires increased traffic resource capabilities.

When ETCS is using circuit switched data mode, radio traffic channel capacity utilization is low compared to the requested/assigned bandwidth. Having more than one ETCS session multiplexed to one radio resource using packet switched mode is therefore desirable. Taking into account GSM evolution GPRS/EGPRS bearer services provide packet oriented data transmission that allocates transmission resources on demand and release those resources if no further data are to be exchanged. ETCS message sizes are rather small and the typical message frequency are in the range of several seconds. This allows to multiplex several ETCS sessions to one transmission resource and facilitating use of ETCS level 2 in high density rail traffic areas.

The present document identifies the features required to allow the support of ETCS using GPRS/EGPRS bearer services, in particular the basic ones and those needed to fulfil End-to-End performance requirements.

1 Scope

The present document defines the minimum set of 3GPP GPRS features to support ETCS application and to guarantee QoS required. Two operational cases are applicable in GSM-R networks:

- GSM-R GPRS packet switched bearer service is only utilized by ETCS PS-mode operation - **ETCS only operation**.
- GSM-R GPRS packet switched bearer service is utilized by simultaneous ETCS and other packet data oriented applications - **Simultaneous operation of ETCS and non-ETCS applications**.

Both operational scenarios require basic GPRS features but in case of simultaneous ETCS and non-ETCS operation, ETCS packet data session requires priority over non-ETCS packet data traffic.

The present document is focussing on the relevant references needed for the GSM-R PS-domain. It does not describe the detailed requirements for each of the referred GSM feature.

The minimum requirements on ETSI/3GPP for the use of GSM for application on railway networks are based on the Release 99 version of the Technical Specifications and are described in ETSI EN 301 515 [1.1]. The features serving as the basis for GSM-R PS-domain are described in releases later than Release 99. So the present document is referring to specifications versions later than Release 4 but is not mandating any other functionality than covered by the applicable 3GPP Work Items and referenced in the applicable clauses as listed in clauses 5.1.10 and 5.2.2.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 123 002 (V4.8.0): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Network architecture (3GPP TS 23.002 version 4.8.0 Release 4)".
- [2] ETSI TS 123 060 (V4.11.0): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); General Packet Radio Service (GPRS); Service description; Stage 2 (3GPP TS 23.060 version 4.11.0 Release 4)".
- [3] ETSI TS 123 107 (V4.6.0): "Universal Mobile Telecommunications System (UMTS); Quality of Service (QoS) concept and architecture (3GPP TS 23.107 version 4.6.0 Release 4)".
- [4] ETSI TS 123 207 (V5.10.0): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); End-to-end Quality of Service (QoS) concept and architecture (3GPP TS 23.207 version 5.10.0 Release 5)".
- [5] ETSI TS 124 008 (V4.17.0): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Mobile radio interface Layer 3 specification; Core network protocols; Stage 3 (3GPP TS 24.008 version 4.17.0 Release 4)".
- [6] ETSI TS 103 368 (V1.1.1): "Railway Telecommunications; Commands necessary for mobile radio equipment operation on railways".

- [7] ETSI TS 129 002 (V4.18.0): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Mobile Application Part (MAP) specification (3GPP TS 29.002 version 4.18.0 Release 4)".
- [8] ETSI TS 129 060 (V4.11.0): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); General Packet Radio Service (GPRS); GPRS Tunnelling Protocol (GTP) across the Gn and Gp interface (3GPP TS 29.060 version 4.11.0 Release 4)".
- [9] ETSI TS 129 061 (V4.10.1): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Interworking between the Public Land Mobile Network (PLMN) supporting packet based services and Packet Data Networks (PDN) (3GPP TS 29.061 version 4.10.1 Release 4)".
- [10] ETSI TS 143 064 (V4.5.0): "Digital cellular telecommunications system (Phase 2+); Overall description of the GPRS radio interface; Stage 2 (3GPP TS 43.064 version 4.5.0 Release 4)".
- [11] ETSI TS 144 018 (V4.23.0): "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 specification; Radio Resource Control (RRC) protocol (3GPP TS 44.018 version 4.23.0 Release 4)".
- [12] ETSI TS 144 060 (V4.23.0): "Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Mobile Station (MS) - Base Station System (BSS) interface; Radio Link Control / Medium Access Control (RLC/MAC) protocol (3GPP TS 44.060 version 4.23.0 Release 4)".
- [13] ETSI TS 144 064 (V4.4.0): "Digital cellular telecommunications system (Phase 2+); Mobile Station - Serving GPRS Support Node (MS-SGSN); Logical Link Control (LLC) Layer Specification (3GPP TS 44.064 version 4.4.0 Release 4)".
- [14] ETSI TS 144 065 (V4.3.0): "Digital cellular telecommunications system (Phase 2+); Mobile Station (MS) - Serving GPRS Support Node (SGSN); Subnetwork Dependent Convergence Protocol (SNDCP) (3GPP TS 44.065 version 4.3.0 Release 4)".
- [15] ETSI TS 148 018 (V4.7.0): "Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Base Station System (BSS) - Serving GPRS Support Node (SGSN); BSS GPRS Protocol (3GPP TS 48.018 version 4.7.0 Release 4)".
- [16] ETSI TS 145 001 (V4.5.0): "Digital cellular telecommunications system (Phase 2+); Physical layer on the radio path; General description (3GPP TS 45.001 version 4.5.0 Release 4)".
- [17] ETSI TS 145 002 (V4.8.0): "Digital cellular telecommunications system (Phase 2+); Multiplexing and multiple access on the radio path (3GPP TS 45.002 version 4.8.0 Release 4)".
- [18] ETSI TS 145 003 (V4.4.0): "Digital cellular telecommunications system (Phase 2+); Channel coding (3GPP TS 45.003 version 4.4.0 Release 4)".
- [19] ETSI TS 145 004 (V4.2.0): "Digital cellular telecommunications system (Phase 2+); Modulation (3GPP TS 45.004 version 4.2.0 Release 4)".
- [20] ETSI TS 145 005 (V4.19.0): "Digital cellular telecommunications system (Phase 2+); Radio transmission and reception (3GPP TS 45.005 version 4.19.0 Release 4)".
- [21] ETSI TS 145 008 (V4.19.0): "Digital cellular telecommunications system (Phase 2+); Radio subsystem link control (3GPP TS 45.008 version 4.19.0 Release 4)".
- [22] ETSI TS 145 010 (V4.5.0): "Digital cellular telecommunications system (Phase 2+); Radio subsystem synchronization (3GPP TS 45.010 version 4.5.0 Release 4)".
- [23] ETSI TS 148 016 (V4.4.0): "Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Base Station System (BSS) - Serving GPRS Support Node (SGSN) Interface; Network Service (3GPP TS 48.016 version 4.4.0 Release 4)".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EN 301 515: "Global System for Mobile communication (GSM); Requirements for GSM operation on railways".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

ETCS application: comprises the EuroRadio protocol suite

non-ETCS application(s): comprises any other protocol suites than EuroRadio

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ARP	Allocation Retention Priority
BSS	Base Station Subsystem
CS	Coding Schemes
EGPRS	Evolved GPRS
ETCS	European Train Control System
ETSI	European Telecommunication Standards Institute
GERAN	GSM/EDGE Radio Access Network
GGSN	Gateway GPRS Support Node
GPRS	General Packet Radio Service
GSM	Global System Mobile
GSM-R	Global System for Mobile communication for Railway application
HARQ	Hybrid Automatic Repeat Request
IP	Internet Protocol
LLC	Logical Link Control
MCS	Modulation Coding Schemes
NACC	Network Assisted Cell Change
NSE	Network Service Entity
PCU	Packet Control Unit
PDP	Packet Data Protocol
PDU	Protocol Data Unit
PFC	Packet Flow Context
PS	Packet Switched
QoS	Quality of Service
RAN	Radio Access Network
RIM	RAN Information Management
RLC	Radio Link Control
SGSN	Serving GPRS Support Node
TBF	Temporary Block Flow

4 General requirements

4.1 ETCS application characteristics

GPRS and EGPRS are the available packet switched bearer services based on GSM, and are applicable for GSM-R too. These bearer services are to be considered for the transport of the ETCS application and in addition, certain features are required to adapt to the ETCS characteristics and to prioritize the ETCS application against other non-ETCS applications while sharing the radio and network resources.

ETCS application is safety related and therefore requires reactive processing and highly reliable transport along the transmission path. One of the GPRS main principles is that radio transmission resources are allocated based on the demand principle and released after a short guard time if no further data are to be transmitted. The message periodicity (inter arrival frequency of application user data packets) between the involved communication entities inside the ETCS application can vary between one and several seconds (see example in Figure 1). This can result in the release of allocated transmission resources too early which causes additional ETCS user data transfer delay.

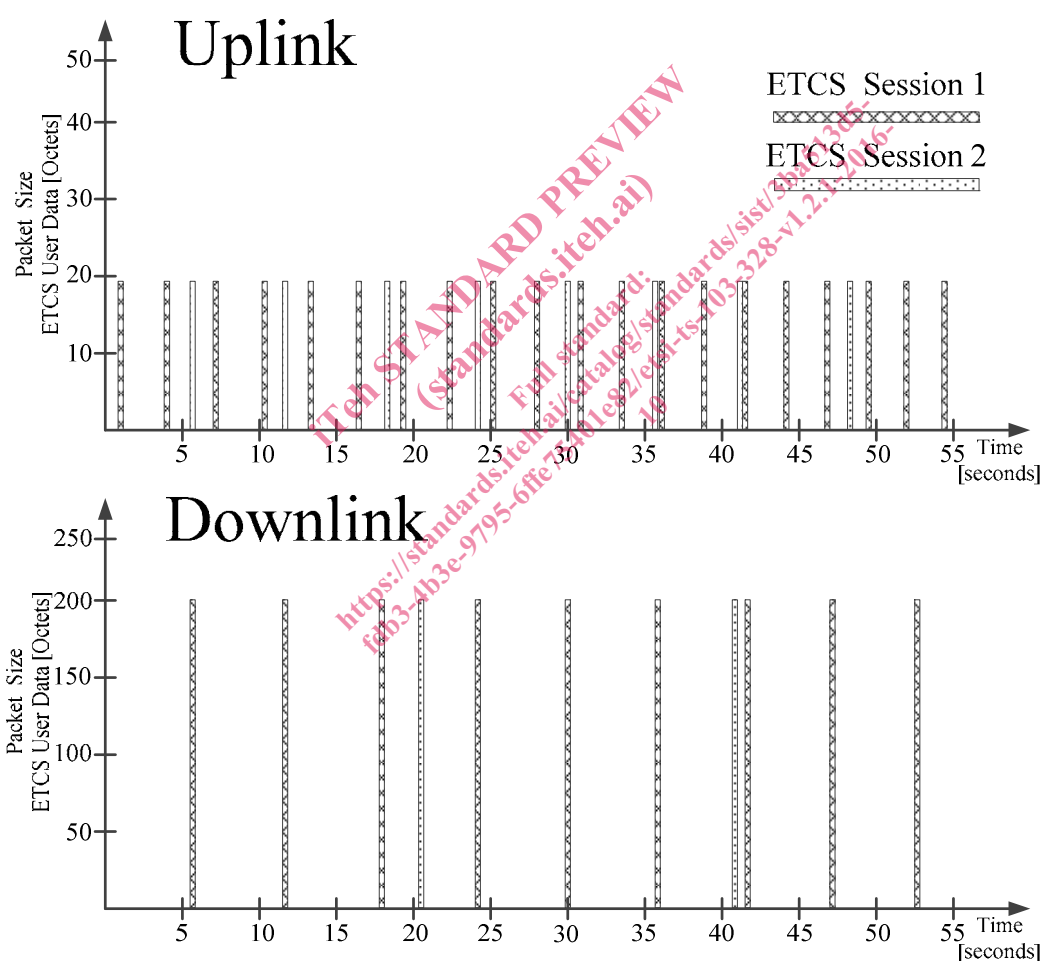


Figure 1: Example Inter-Transmission and arrival intervals in ETCS

4.2 Coexistence between ETCS and non-ETCS applications

ETCS application can be the only service using GPRS/EGPRS bearer or together with other non-ETCS applications (simultaneous operation of ETCS/non-ETCS applications). Latter scenario requires a strict separation of the different traffic types using different QoS profile parameters as part of the subscription and the processing of the QoS parameters within the radio access domain and core network domain.

In particular, the radio access domain has to prioritize the ETCS traffic over the non-ETCS traffic if those are operated simultaneously. In addition to the prioritization of ETCS traffic in both traffic scenarios, guaranteed transmission bandwidth should be provided to fulfil the QoS requirements.

4.3 Reference 3GPP Release

All GSM GPRS features that are referenced in the present document shall be implemented to fulfil in minimum 3GPP Release 4 GERAN, based on A/Gb mode operation.

Specific timer and counter specification of the normative references shall be supported, except the subsequent chapters indicating specific values for the operation of ETCS.

4.4 Applicability

The present document shall only apply to Mobile Terminals of an ETCS Data Only Radio.

5 Bearer services and features for ETCS operation

5.1 Basic features

5.1.0 General

The features that are listed in this clause are considered for ETCS operation.

5.1.1 Network - Bearer Service capabilities

The GSM-R network shall support all mandatory GPRS bearer services capabilities in the radio access domain (BSS) according to:

- ETSI TS 123 002 [1]
- ETSI TS 123 060 [2]
- ETSI TS 123 107 [3]
- ETSI TS 143 064 [10]
- ETSI TS 144 018 [11]
- ETSI TS 144 060 [12]
- ETSI TS 145 001 [16]
- ETSI TS 145 002 [17]
- ETSI TS 145 003 [18]
- ETSI TS 145 004 [19]
- ETSI TS 145 005 [20]
- ETSI TS 145 008 [21]
- ETSI TS 145 010 [22]