
**Powered industrial trucks — Test
methods for verification of visibility —**

Part 1:

**Sit-on and stand-on operator trucks and
variable-reach trucks up to and including
10 t capacity**

*Chariots de manutention automoteurs — Méthodes d'essai pour la
vérification de la visibilité —*

*Partie 1: Chariots à conducteur assis et debout et chariots à portée
variable ayant une capacité allant jusqu'à 10 t incluses*

ISO 13564-1:2012

<https://standards.iteh.ai/catalog/standards/iso/c10733c7-5d75-4d81-a332-4b43988e80bc/iso-13564-1-2012>



Reference number
ISO 13564-1:2012(E)

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 13564-1:2012](https://standards.iteh.ai/catalog/standards/iso/c10733c7-5d75-4d81-a332-4b43988e80bc/iso-13564-1-2012)

<https://standards.iteh.ai/catalog/standards/iso/c10733c7-5d75-4d81-a332-4b43988e80bc/iso-13564-1-2012>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Truck configuration	4
4.1 Testing	4
4.2 Height of load-carrying surface	4
4.3 Tilt of the mast or load-carrying surface	4
4.4 Retractable mast trucks	5
5 Test equipment — Direct visibility	5
5.1 Test body	5
5.2 Test screen	5
5.3 Distance of the lighting equipment to the industrial truck	5
6 Test procedures — Direct visibility	5
6.1 Light source position	5
6.2 Test paths	6
6.3 Measurement procedure	6
7 Test procedures — Indirect visibility	8
8 Other test methods	8
9 Acceptance criteria	8
9.1 General	8
9.2 Direct visibility	8
9.3 Indirect visibility	9
10 Test report	10
10.1 Truck information	10
10.2 Test results	10
Bibliography	21

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 13564-1 was prepared by Technical Committee ISO/TC 110, *Industrial trucks*, Subcommittee SC 2, *Safety of powered industrial trucks*.

ISO 13564 consists of the following parts, under the general title *Powered industrial trucks — Test methods for verification of visibility*:

— *Part 1: Sit-on and stand-on operator trucks and variable-reach trucks up to and including 10 t capacity*

Variable-reach container-handling trucks with greater than 10 t capacity are to form the subject of a future part 3.

[ISO 13564-1:2012](https://standards.iteh.ai/standards/iso/13564-1-2012)

<https://standards.iteh.ai/catalog/standards/iso/c10733c7-5d75-4d81-a332-4b43988e80bc/iso-13564-1-2012>

Powered industrial trucks — Test methods for verification of visibility —

Part 1:

Sit-on and stand-on operator trucks and variable-reach trucks up to and including 10 t capacity

1 Scope

This part of ISO 13564 specifies the requirements and test procedures for all-round visibility of self-propelled industrial trucks with a rated capacity up to and including 10 000 kg, and industrial variable-reach trucks with a rated capacity up to and including 10 000 kg, with a sit-on or stand-on operator, without load, and equipped with fork arms or load platform as defined in ISO 5053.

It is not applicable to

- low-lift straddle carriers (as defined in ISO 5053:1987, 3.1.3.2.3),
- high-lift straddle carriers (as defined in ISO 5053:1987, 3.1.3.1.11),
- trucks with an elevating operator position, when the operating position is elevated,
- trucks with a rated capacity greater than 10 000 kg,
- rough-terrain variable-reach trucks,
- container-handling trucks,
- side loaders.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3691-1:2011, *Industrial trucks — Safety requirements and verification — Part 1: Self-propelled industrial trucks, other than driverless trucks, variable-reach trucks and burden-carrier trucks*

ISO 5053:1987, *Powered industrial trucks — Terminology*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5053 and the following apply.

3.1 industrial variable-reach truck
industrial truck equipped with longitudinal articulating or telescopic and elevating boom(s) (swivelling horizontally by no more than $\pm 5^\circ$), not including rough-terrain variable-reach trucks

3.2 truck profile
contour which is determined by the largest rectangular width and length parallel to the longitudinal axis of the truck, including the front vertical surface of the fork arms

NOTE The blades of the fork arms are not taken into account.

**3.3 seat index point
SIP**
point on the central vertical plane of the seat

NOTE Adapted from ISO 5353:1995, definition 3.1.

**3.4 standing index point
STIP**
perpendicular projection of the mid-axis of the standing operator in the normal operating position

NOTE For determination of the STIP, see Figure 4.

**3.5 adjusted standing index point
ASTIP**
adjusted STIP located relative to the STIP, as provided in 6.1.3, to simulate body movement of the operator during truck operation

3.6 forward direction
forward direction of travel, dependent on the type of truck and according to ISO 3691-1:2011, Annex A.

3.7 manoeuvring
motion of an industrial truck at slow speed and for short distances

NOTE Manoeuvring can include movements such as operation in narrow aisles, when turning, passing objects close by, load pick-up and put-down, approaching and retreating from loads, and other operations not included when travelling.

3.8 travelling
movement of the truck over relatively long distances and open areas up to the maximum speed

3.9 lighting equipment
system of lights that represents the range of positions of the operator's eyes, including head and body movement

See Figures 2 and 3.

3.10**test body**

body that simulates an obstacle, e.g. a person in stooped position, and with which the visibility conditions are evaluated

See Figure 5.

3.11**test screen**

surface with which the visibility conditions while travelling forward are evaluated

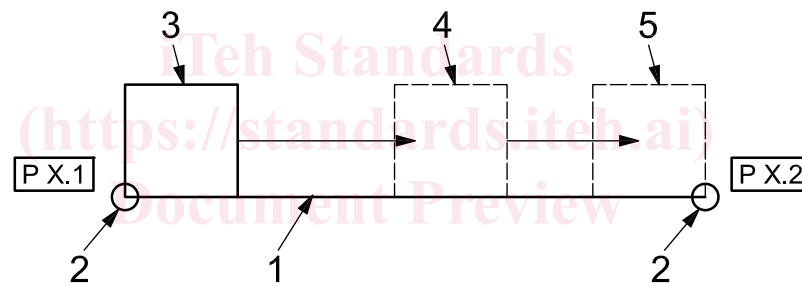
3.12**normal operating position**

position in which the operator is able to control all functions for driving and load handling as defined by the manufacturer

3.13**test path**

path marked on the floor around the industrial truck to be tested and on which the test body is moved for the visibility measurement tests

See Figures 6, 7 and 8.

**Key**

- 1 test path
- 2 test path end point
- 3 test body at end point P X.1
- 4 test body moved along entire length of test path, not extending past end points
- 5 test body at end point P X.2

Figure 1 — Top view of test path

3.14**illuminated area**

surface on the test body or test screen which is illuminated by at least one light of the lighting equipment

3.15**dark shadow**

surface on the test body or test screen which is not illuminated by any light of the lighting equipment

NOTE When checking for dark shadows on the test body or test screen, the shadow cast by an object, e.g. clipboard or hand, can help to identify dark shadow areas.

3.16**direct visibility**

illumination of the test body and test screen without the use of auxiliary equipment

3.17

indirect visibility

illumination of the test body and test screen with the use of auxiliary equipment

3.18

auxiliary equipment

equipment used to compensate the limitation of direct visibility by, for example, mirrors or camera/monitor systems

4 Truck configuration

4.1 Testing

The test shall be conducted with an unladen truck on a level, horizontal floor. The truck shall be equipped with a load platform or two fork arms of a length up to dimension A in Figures 6, 7 and 8, centrally spaced at an outside distance within the normal fork arm adjustment range of the specific configuration tested.

Tests shall be conducted on a truck with basic configuration, not equipped with any attachment, load or other variable/optional equipment. The test shall be valid for the specific configuration tested. The test method of this part of ISO 13564 applies to all configurations and additional tests for various types of mast, external fuel tank, counterweights, cab, etc. are required for those configurations that adversely affect visibility.

4.2 Height of load-carrying surface

a) For all trucks except industrial variable-reach trucks

The load-carrying surface of the fork arms, measured at the heel end, shall be positioned from 100 mm to 300 mm above the floor.

b) Industrial variable-reach trucks, low-mount boom

For industrial variable-reach trucks with a boom pivot point height lower than the height of the SIP + 650 mm, the load-carrying surface of the fork arms, measured at the heel end, shall be positioned 100 mm to 300 mm above the floor.

c) Industrial variable-reach trucks, high-mount boom

For industrial variable-reach trucks with a boom pivot point height equal to or higher than the height of the SIP + 650 mm, the load-carrying surface of the fork arms, measured at the heel end, shall be positioned 500 mm to 900 mm above the floor.

4.3 Tilt of the mast or load-carrying surface

a) Travelling tests

The mast or load-carrying surface shall be tilted rearward to the maximum, but by not more than 10°, for all travelling tests. If the means of tilting the mast or load-carrying surface is accomplished by tilting the truck chassis, these tests shall be performed with the chassis horizontal.

b) Manoeuvring tests

The mast shall be vertical or the load-carrying surface horizontal for all manoeuvring tests.

c) Fork arm or load platform tests

The mast shall be vertical or the load-carrying surface horizontal for the fork arm or load platform test.

4.4 Retractable mast trucks

Trucks with a retractable mast shall have the mast fully retracted.

5 Test equipment — Direct visibility

5.1 Test body

The test body shall be movable, with a vertical test surface height of 1 200 mm and width of 500 mm, as shown in Figure 5. The surfaces may be marked with a 100 mm × 100 mm grid to facilitate measurement of illuminated areas.

5.2 Test screen

The test screen shall have a vertical surface with a width of at least 500 mm and a height starting at 1 200 mm above the floor up to 900 mm above the SIP or 1 900 mm above the STIP. The surfaces may be provided with a grid of 100 mm × 100 mm to facilitate evaluation of the illuminated surface.

5.3 Distance of the lighting equipment to the industrial truck

All lights able to be switched-on shall be at least 50 mm within the plan view of the overhead guard, or the inside surface of the cab, or within the plan view outline of the lift truck if not equipped with an overhead guard or cab.

6 Test procedures — Direct visibility

6.1 Light source position

6.1.1 General

The visibility from the industrial truck shall be determined from the operating position with light sources and a test body or screen. The light sources simulate the range of eye positions of the operator. The test body simulates an obstacle to be seen.

6.1.2 Sit-on operator

The light source fixture shown in Figure 2 shall be positioned relative to the SIP. The seat shall be placed at the adjustment position closest to the mid-point of horizontal and vertical adjustment and the mid-point of the suspension height, if so equipped. For trucks with rotatable seats, the seat may be turned toward the direction of the test being conducted. See Figure 9.

6.1.3 Stand-on operator

The light source fixture shown in Figure 3 shall be positioned relative to the STIP.

The STIP is given for a stand-on operator in the normal operating position, with the operator standing at the platform and controlling all functions while facing in the direction of travel.

Procedure for locating the STIP:

- a) determine the appropriate foot positions for the truck being evaluated;
- b) determine the position of the ankle pivot point by the shoe outline and the data given in Figure 4;

- c) determine the mid-point of the line connecting the ankle pivot points to establish the STIP;
- d) the 0° position (before any rotation of the operator's head, shoulders, or torso) is a line through the STIP perpendicular to the line connecting the ankle pivot points as shown in Figure 4; the row of lights may be rotated $\pm 135^\circ$ as shown in Figure 10;
- e) measure the height of the STIP above the floor as well as the location of the STIP relative to a permanent feature of the truck and record.

To simulate body movement during truck operation, an adjusted STIP (ASTIP) may be positioned within an area circumscribed by:

- a 125 mm radius about the STIP for a stand-up rider truck with defined compartment space, e.g. reach truck, pallet stacker truck where the operator's feet/lower body movements are limited due to truck design;
- a 200 mm radius about the STIP for a stand-up platform truck with space for movement, e.g. order-picking trucks, lateral-stacking trucks.

When the STIP for a truck has been established, the location of the STIP shall remain fixed throughout the visibility evaluation. The ASTIP of the test fixture for a particular test may be relocated as defined above, and shown in Figure 4, i.e. Tests 1 to 11 (see Table 3) may have different locations for the axis of rotation. Each test shall have only one location for the ASTIP which shall be referenced from the STIP and recorded.

6.2 Test paths

Test paths P 1.1 to P 9.2 (see Figures 6, 7 and 8) shall consist of lines laid out on the floor around the test truck, parallel and perpendicular to the truck's longitudinal axis. The test paths shall be located from the truck profile which includes the front vertical surface of the fork arms:

- Figure 6 shows the test path for sit-on operator trucks, up to and including 10 000 kg capacity;
- Figure 7 shows the test path for stand-on operator trucks, up to and including 10 000 kg capacity;
- Figure 8 shows the test path for industrial variable-reach trucks, up to and including 10 000 kg capacity.

6.3 Measurement procedure

6.3.1 General

The test body or test screen shall be moved along the test path with the vertical test surface on, and parallel to, the test path. The light source shall be turned on to illuminate the test body or test screen.

Measurements of illuminated surfaces and dark shadow shall be made. Figures 6, 7 and 8 show the arrangements and distances of the test paths from the truck.

Where the operator's body rotation is restricted to less than the angle of rotation allowed to orientate the light source to the test path, the test shall be conducted with the light source rotated to the maximum possible angle of rotation of the operator's body.

6.3.2 Travelling

Tests shall be conducted with reference to Table 1 and Figures 6, 7 and 8 as appropriate.

- a) **Forward and rearward travelling tests** (using the test body — Table 3, tests 1 and 2)

Two tests, one for forward travelling and one for rearward travelling, shall be conducted with up to nine lights (T1 to T9) switched on, located 125 mm from the axis of rotation.