

ETSI TS 145 004 V13.4.0 (2017-01)



Digital cellular telecommunications system (Phase 2+) (GSM); GSM/EDGE Modulation (3GPP TS 45.004 version 13.4.0 Release 13)

*iTeh Standards PREVIEW
(standards.iteh.ai)
Full standards list/667bc33b-
https://standards.iteh.ai/catalog/standards/sist/667bc33b-
cd26-4d31-988c-06067c66ae95/etsi-ts-145-004-v13-4-0-
2017-01*



Reference

RTS/TSGR-0645004vd40

Keywords

GSM

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at
<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2017.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and LTE™ are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	4
1 Scope	5
1.1 References	5
1.2 Abbreviations	5
2 Modulation format for GMSK	5
2.1 Modulating symbol rate.....	5
2.2 Start and stop of the burst.....	6
2.3 Differential encoding.....	6
2.4 Filtering.....	6
2.5 Output phase.....	7
2.6 Modulation	7
2.7 Overlaid CDMA	8
3 Modulation format for 8PSK.....	8
3.1 Modulating symbol rate.....	8
3.2 Symbol mapping	8
3.3 Start and stop of the burst.....	9
3.4 Symbol rotation.....	10
3.5 Pulse shaping.....	10
3.6 Modulation	10
4 Modulation format for 16QAM and 32QAM at the normal symbol rate.....	11
4.1 Modulating symbol rate.....	11
4.2 Symbol mapping	11
4.3 Start and stop of the burst.....	12
4.4 Symbol rotation.....	13
4.5 Pulse shaping.....	13
4.6 Modulation	13
5 Modulation format for QPSK, 16QAM and 32QAM at the higher symbol rate.....	13
5.1 Modulating symbol rate.....	13
5.2 Symbol mapping	14
5.3 Start and stop of the burst.....	14
5.4 Symbol rotation.....	14
5.5 Pulse shaping.....	14
5.6 Modulation	15
6 Modulation format for AQPSK.....	15
6.1 Modulating symbol rate.....	15
6.2 Symbol mapping	15
6.3 Start and stop of the burst.....	16
6.4 Symbol rotation.....	17
6.5 Pulse shaping.....	17
6.6 Modulation	17
Annex A (normative): Tx filter coefficients for the spectrally wide pulse shape.....	18
Annex B (informative): Change history	19
History	20

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/6644c33b-cd26-4d31-988c-06067c66ae95f/etsi-ts-145-004-v13.4.0-2017-01>

1 Scope

The modulator receives the bits from the encryption unit, see 3GPP TS 45.001, and produces an RF signal. The filtering of the Radio Frequency (RF) signal necessary to obtain the spectral purity is not defined, neither are the tolerances associated with the theoretical filter requirements specified. These are contained in 3GPP TS 45.005.

1.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: 'Vocabulary for 3GPP Specifications'.
- [2] 3GPP TS 45.001: 'Physical Layer on the Radio Path (General Description)'.
- [3] 3GPP TS 45.002: 'Multiplexing and multiple access on the radio path'.
- [4] 3GPP TS 45.005: 'Radio transmission and reception'.
- [5] 3GPP TS 45.010: 'Radio subsystem synchronization'.
- [6] 3GPP TS 44.060: 'Radio Link Control/ Medium Access Control (RLC/MAC) protocol'.
- [7] 3GPP TS 43.064: 'General Packet Radio Service (GPRS)'.
- [8] 3GPP TS 45.003: 'Channel Coding'.

1.2 Abbreviations

Abbreviations used in this specification are listed in 3GPP TR 21.905. In addition to abbreviations in 3GPP TR 21.905 the following abbreviation apply:

AQPSK	Adaptive Quadrature Phase Shift Keying
EC	Extended Coverage

2 Modulation format for GMSK

2.1 Modulating symbol rate

The modulating symbol rate is the normal symbol rate which is defined as $1/T = 1\ 625/6$ ksymb/s (i.e. approximately 270.833 ksymb/s), which corresponds to $1\ 625/6$ kbit/s (i.e. 270.833 kbit/s). T is the normal symbol period (see 3GPP TS 45.010).

2.2 Start and stop of the burst

Before the first bit of the bursts as defined in 3GPP TS 45.002 enters the modulator, the modulator has an internal state as if a modulating bit stream consisting of consecutive ones ($d_i = 1$) had entered the differential encoder. Also after the last bit of the time slot, the modulator has an internal state as if a modulating bit stream consisting of consecutive ones ($d_i = 1$) had continued to enter the differential encoder. These bits are called dummy bits and define the start and the stop of the active and the useful part of the burst as illustrated in figure 1. Nothing is specified about the actual phase of the modulator output signal outside the useful part of the burst. In case of EC operation, the phase during the useful part of contiguous bursts, belonging to the same blind physical layer transmissions within a TDMA frame, has a fixed relation, see subclauses 2.6 and 2.7.

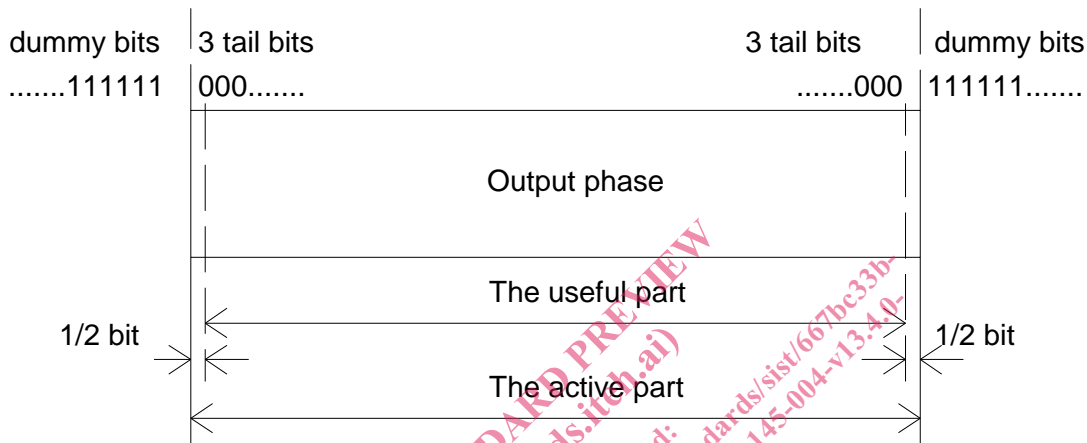


Figure 1: Relation between active part of burst, tail bits and dummy bits. For the normal burst the useful part lasts for 147 modulating bits

2.3 Differential encoding

Each data value $d_i = [0,1]$ is differentially encoded. The output of the differential encoder is:

$$\hat{d}_i = d_i \oplus d_{i-1} \quad (d_i \in \{0,1\})$$

where \oplus denotes modulo 2 addition.

The modulating data value α_i input to the modulator is:

$$\alpha_i = 1 - 2\hat{d}_i \quad (\alpha_i \in \{-1,+1\})$$

2.4 Filtering

The modulating data values α_i as represented by Dirac pulses excite a linear filter with impulse response defined by:

$$g(t) = h(t) * \text{rect}\left(\frac{t}{T}\right)$$

where the function $\text{rect}(x)$ is defined by:

$$\text{rect}\left(\frac{t}{T}\right) = \frac{1}{T} \quad \text{for } |t| < \frac{T}{2}$$

$$\text{rect}\left(\frac{t}{T}\right) = 0 \quad \text{otherwise}$$

and * means convolution. $h(t)$ is defined by:

$$h(t) = \frac{\exp\left(\frac{-t^2}{2\delta^2 T^2}\right)}{\sqrt{(2\pi) \cdot \delta T}}$$

where

$$\delta = \frac{\sqrt{\ln(2)}}{2\pi BT} \quad \text{and } BT = 0.3$$

where B is the 3 dB bandwidth of the filter with impulse response $h(t)$. This theoretical filter is associated with tolerances defined in 3GPP TS 45.005.

2.5 Output phase

The phase of the modulated signal is:

$$\varphi(t') = \sum_i a_i \pi h_i \int_{-\infty}^{t'-iT} g(u) du$$

where the modulating index h is 1/2 (maximum phase change in radians is $\pi/2$ per data interval).

The time reference $t' = 0$ is the start of the active part of the burst as shown in figure 1. This is also the start of the bit period of bit number 0 (the first tail bit) as defined in 3GPP TS 45.002.

2.6 Modulation

The modulated RF carrier, except for start and stop of the TDMA burst may therefore be expressed as:

$$x(t') = \sqrt{\frac{2E_c}{T}} \cdot \cos(2\pi f_0 t' + \varphi(t') + \varphi_0)$$

where E_c is the energy per modulating bit, f_0 is the centre frequency and φ_0 is a random phase and is constant during one burst.

In case of EC operation when using blind physical layer transmissions (see 3GPP TS 43.064 [7]) the modulated RF carrier, except for start and stop of the burst may, for each blind physical layer transmission of a burst for which phase and amplitude coherency is required (see 3GPP TS 45.005 [4]), be expressed as:

$$x(t') = \sqrt{\frac{2E_c}{T}} \cdot \cos(2\pi f_0 (t'+t_0) + \varphi(t') + \varphi_{157} + \varphi_0)$$

where

- t_0 is a burst-specific time offset, constant during one burst, and is defined as the time difference between time instant $t' = 0$ for the current burst and $t' = 0$ for the first transmission of the same burst in the current TDMA frame.
- φ_{157} is a phase shift of either 0 or π , and is constant during one burst.

- φ_0 is a random phase and is constant during all blind physical layer transmissions of the same burst within the same TDMA frame.

For EC-GSM_IoT, only integer timeslot lengths are allowed (see 3GPP TS 45.010 [5]). If any blind physical layer transmission is transmitted in the uplink on timeslot 0 or timeslot 4, which are 157 symbols long, all following blind physical layer transmissions of the same burst in that TDMA frame shall be shifted in phase by πh , i.e. $\varphi_{157} = \pi h$, otherwise $\varphi_{157} = 0$. For the downlink this phase shift shall not be applied, i.e. $\varphi_{157} = 0$.

2.7 Overlaid CDMA

In the case of Overlaid CDMA the modulated RF carrier may be expressed with an additional term compared to subclause 2.6 representing the Overlaid CDMA code:

$$x(t') = \sqrt{\frac{2E_c}{T}} \cdot \cos(2\pi f_0(t'+t_0) + \varphi(t') + \varphi_{157} + \varphi_0 + OC \cdot \pi)$$

where OC equals 0 or 1 in accordance with the applied Overlaid CDMA code (see 3GPP TS 45.002 [3]) and is constant during one burst. For each blind physical layer transmission within a TDMA frame, OC equals its respective Overlaid CDMA code element. For example for Overlaid CDMA code 0,0,1,1, OC equals 0 for the first two blind physical layer transmissions and 1 for the last two blind physical layer transmissions within a TDMA frame.

NOTE: If the blind physical layer transmissions within a TDMA frame are continuously modulated, a phase shift of π between two bursts can be well approximated by inverting all the bits of the second burst, including three to five guard bits preceding and following the tail bits, respectively.

3 Modulation format for 8PSK

3.1 Modulating symbol rate

The modulating symbol rate is the normal symbol rate which is defined as $1/T = 1\ 625/6$ ksymb/s (i.e. approximately 270.833 ksymb/s), which corresponds to $3 \cdot 1\ 625/6$ kbit/s (i.e. 812.5 kbit/s). T is the normal symbol period (see 3GPP TS 45.010).

3.2 Symbol mapping

The modulating bits are Gray mapped in groups of three to 8PSK symbols by the rule

$$s_i = e^{j2\pi l/8}$$

where l is given by table 1.

Table 1: Mapping between modulating bits and the 8PSK symbol parameter l .

Modulating bits $d_{3i}, d_{3i+1}, d_{3i+2}$	Symbol parameter l
(1,1,1)	0
(0,1,1)	1
(0,1,0)	2
(0,0,0)	3
(0,0,1)	4
(1,0,1)	5
(1,0,0)	6
(1,1,0)	7

This is illustrated in figure 2.

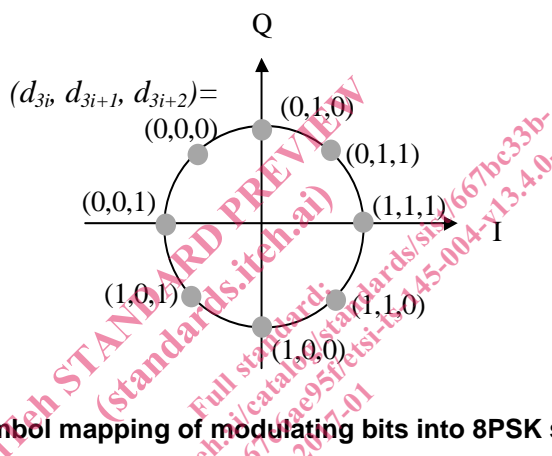


Figure 2: Symbol mapping of modulating bits into 8PSK symbols.

3.3 Start and stop of the burst

Before the first bit of the bursts as defined in 3GPP TS 45.002 enters the modulator, the state of the modulator is undefined. Also after the last bit of the burst, the state of the modulator is undefined. The tail bits (see 3GPP TS 45.002) define the start and the stop of the active and the useful part of the burst as illustrated in figure 3. Nothing is specified about the actual phase of the modulator output signal outside the useful part of the burst.

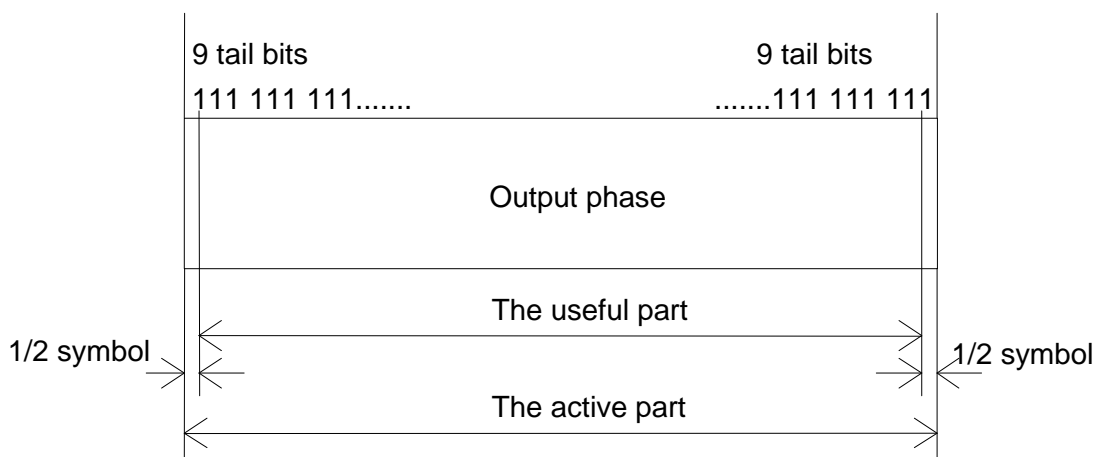


Figure 3: Relation between active part of burst and tail bits. For the normal burst the useful part lasts for 147 modulating symbols