



# SLOVENSKI STANDARD

## SIST ISO 789-10:1997

01-maj-1997

---

### Kmetijski traktorji - Preskusne metode - 10. del: Hidravlična moč na spoju traktor-priključek

Agricultural tractors -- Test procedures -- Part 10: Hydraulic power at tractor/implement interface

### iTeh STANDARD PREVIEW

Tracteurs agricoles -- Méthodes d'essai -- Partie 10: Puissance hydraulique disponible à la liaison tracteur/instrument

[SIST ISO 789-10:1997](https://standards.iteh.ai/catalog/standards/sist/6156110e-d847-4fa5-852c-50425b6683b29/sist-iso-789-10-1997)

Ta slovenski standard je istoveten z: **ISO 789-10:1996**

---

#### **ICS:**

65.060.10      Kmetijski traktorji in prikolice      Agricultural tractors and  
trailed vehicles

**SIST ISO 789-10:1997**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ISO 789-10:1997](#)

<https://standards.iteh.ai/catalog/standards/sist/6156110e-db47-4fa5-852c-30425b683b29/sist-iso-789-10-1997>

INTERNATIONAL  
STANDARD

**ISO**  
**789-10**

First edition  
1996-03-01

---

---

**Agricultural tractors — Test procedures —**

**Part 10:**

Hydraulic power at tractor/implement interface

iTeh STANDARD PREVIEW

(standards.iteh.ai)

*Tracteurs agricoles — Méthodes d'essai —*

*Partie 10: Puissance hydraulique disponible à la liaison tracteur/instrument*

<https://standards.iteh.ai/catalog/standards/sist/6156110e-db47-4fa5-852c-30425b683b29/sist-iso-789-10-1997>



Reference number  
ISO 789-10:1996(E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 789-10 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 2, *Common tests*.

ISO 789 consists of the following parts, under the general title *Agricultural tractors — Test procedures*:

- Part 1: *Power tests for power take-off*
- Part 2: *Rear three-point linkage lifting capacity*
- Part 3: *Turning and clearance diameters*
- Part 4: *Measurement of exhaust smoke*
- Part 5: *Partial power PTO — Non-mechanically transmitted power*
- Part 6: *Centre of gravity*
- Part 7: *Axle power determination*
- Part 8: *Engine air cleaner*
- Part 9: *Power tests for drawbar*
- Part 10: *Hydraulic power at tractor/implement interface*

© ISO 1996

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

- *Part 11: Steering capability of wheeled tractors*
- *Part 12: Low temperature starting*

Annex A forms an integral part of this part of ISO 789.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ISO 789-10:1997](https://standards.iteh.ai/catalog/standards/sist/6156110e-db47-4fa5-852c-30425b683b29/sist-iso-789-10-1997)

<https://standards.iteh.ai/catalog/standards/sist/6156110e-db47-4fa5-852c-30425b683b29/sist-iso-789-10-1997>

**iTeh STANDARD PREVIEW**  
This page intentionally left blank  
**(standards.iteh.ai)**

SIST ISO 789-10:1997

<https://standards.iteh.ai/catalog/standards/sist/6156110e-db47-4fa5-852c-30425b683b29/sist-iso-789-10-1997>

# Agricultural tractors — Test procedures —

## Part 10:

### Hydraulic power at tractor/implement interface

#### 1 Scope

This part of ISO 789 specifies the test procedure for determining the hydraulic pressures at the external hydraulic service as specified in ISO 10448. A companion test procedure is included for measuring the maximum hydraulic power available.

#### 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 789. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 789 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 730-1:1994, *Agricultural wheeled tractors — Rear-mounted three-point linkage — Part 1: Categories 1, 2, 3 and 4.*

ISO 3448:1992, *Industrial liquid lubricants — ISO viscosity classification.*

ISO 5675:1992, *Agricultural tractors and machinery — General purpose quick-action hydraulic couplers.*

ISO 6149-1:1993, *Connections for fluid power and general use — Ports and stud ends with ISO 261 threads and O-ring sealing — Part 1: Ports with O-ring seal in truncated housing.*

ISO 6149-2:1993, *Connections for fluid power and general use — Ports and stud ends with ISO 261*

*threads and O-ring sealing — Part 2: Heavy-duty (S series) stud ends — Dimensions, design, test methods and requirements.*

ISO 6149-3:1993, *Connections for fluid power and general use — Ports and stud ends with ISO 261 threads and O-ring sealing — Part 3: Light-duty (L series) stud ends — Dimensions, design, test methods and requirements.*

ISO 10448:1994, *Agricultural tractors — Hydraulic pressure for implements.*

#### 3 Definitions

For the purposes of this part of ISO 789, the following definitions apply.

**3.1 agricultural tractor:** Self-propelled machine, either wheeled having at least two axles or track-laying, particularly designed to pull, push, carry and operate implements used for agricultural work (including forestry work).

NOTE 1 It may be provided with a detachable loading platform.

**3.2 rated engine speed:** Engine speed specified by the tractor manufacturer for continuous operation at full load.

**3.3 external hydraulic service:** Source of hydraulic power, derived from the hydraulic system of the agricultural tractor, available for use on an implement mounted on, coupled to or otherwise used in conjunction with it. [ISO 10448:1994]

**3.4 coupler pair:** Pair of female hydraulic couplers compatible with male couplers specified in ISO 5675, mounted on agricultural tractors and connected to the hydraulic system to allow flow from one coupler to the other. [ISO 10448:1994]

**3.5 available differential pressure:** Steady state difference in hydraulic pressure between two male coupler parts on the implement side. [ISO 10448:1994]

**3.6 maximum pressure:** Maximum steady state hydraulic pressure at either male coupler connected to a coupler pair. [ISO 10448:1994]

**3.7 maximum loop return pressure:** Maximum steady hydraulic pressure at the male coupler returning flow to a hydraulic system that can reverse the flow through that coupler. [ISO 10448:1994]

### 3.8 maximum sump return pressure

(1) With coupler: Maximum steady state hydraulic pressure at the male coupler returning flow directly to the reservoir.

(2) Without coupler: Maximum steady state hydraulic pressure at an M22 × 1,5 or M27 × 2 thread size port in accordance with ISO 6149-1, ISO 6149-2 or ISO 6149-3, returning flow directly to the reservoir.

[ISO 10448:1994]

**3.9 rated maximum hydraulic pressure:** Maximum pressure as specified by the tractor manufacturer.

**3.10 peak pressure:** Maximum instantaneous hydraulic pressure at either male coupler connected to a coupler pair. [ISO 10448:1994]

## 4 Measurement units and tolerances

The following units and tolerances, applicable to the maximum value measured, are used in this part of ISO 789:

- a) rotational frequency, in revolutions per minute:  $\pm 0,5 \%$
- b) time, in seconds:  $\pm 0,2 \text{ s}$
- c) temperature, in degrees Celsius:  $\pm 2 \text{ }^\circ\text{C}$  (applicable to actual readings)
- d) pressure, in megapascals:  $\pm 0,002 \%$
- e) flow, in litres per minute:  $\pm 2 \%$

## 5 General requirements

### 5.1 Specification

The tractor tested shall have its specification given in the test report (see annex A) and shall be used in accordance with the manufacturer's recommendations for normal operation.

### 5.2 Running-in and preliminary adjustments

**5.2.1** The tractor shall be run-in prior to the test.

**5.2.2** The hydraulic fluid shall be as recommended by the manufacturer and identified by type and viscosity in accordance with ISO 3448.

**5.2.3** The throttle or governor control lever shall be adjusted to maintain the rated engine speed. However, in those cases where the manufacturer prefers to carry out specific portions of the test at other engine speeds, the test engine speed shall be continuously recorded.

**5.2.4** At the start of each test, the temperature of the hydraulic fluid in the tractor hydraulic reservoir shall be at  $65 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$  and be recorded. If this cannot be achieved, due to the presence of an oil cooler or other system component, the temperature measured during the test shall be stated in the test report.

**5.2.5** All tractor-mounted flow controls shall be adjusted to obtain maximum flow.

## 6 Available hydraulic pressure test


### 6.1 Steady state

#### 6.1.1 Test conditions

The test conditions for determining maximum pressure, minimum available differential pressure, maximum loop return pressure and sump return pressure are as follows.

- a) A test assembly shall be looped between a coupler pair. The test assembly shall consist of a minimum 10 mm inside diameter hose test assembly with male couplers conforming to ISO 5675 size 12,5 at each end and including two pressure gauges located respectively immediately next to each coupler, a flow meter and an adjustable restrictor valve which is used to vary flowrate. (See figure 1.)



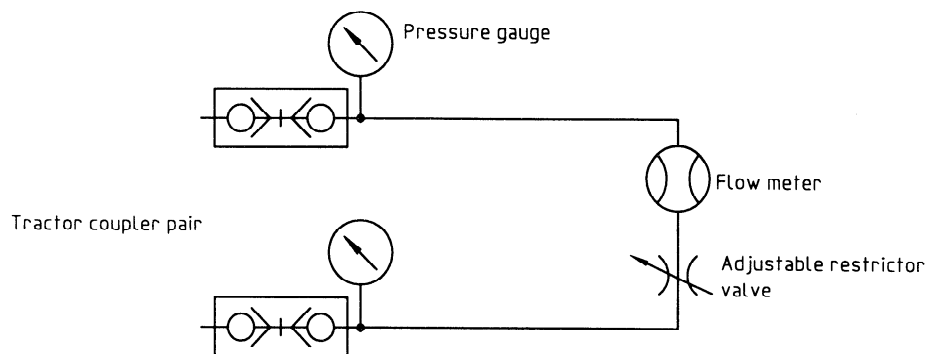

**Figure 1 — Steady state test assembly**

- b) When determining the maximum sump return pressure with coupler, one end of the test assembly shall be connected to a coupler that is connected directly to the tractor reservoir or to the sump return port as specified by the manufacturer and the other to one half of a coupler pair.
- c) When determining the maximum sump return pressure without coupler, the test assembly shall be changed by removing the coupler from the sump return end and replacing it with suitable adapters to connect directly to the sump return port.

## 6.1.2 Test procedure

### 6.1.2.1 Flow through single coupler pair

Actuate the tractor external hydraulic service to route oil through the test assembly. Adjust the adjustable restrictor valve or engine speed to produce the standard flow of 30 l/min for category 1 tractors and 50 l/min for category 2 or 3 tractors, as specified in ISO 730-1. Record the pressure near the coupler where oil is exiting from the tractor, the pressure near the coupler where oil is reentering the tractor, oil flow and reservoir oil temperature. Maximum loop return pressure (see 3.7) is the pressure near the coupler where oil is entering the tractor.

Calculate the available differential pressure by subtracting the pressure of oil reentering the tractor from the pressure of oil exiting the tractor.

Close the adjustable restrictor valve. Record the pressure near the coupler where oil is exiting from the tractor to determine the maximum pressure.

### 6.1.2.2 Flow into sump return port with coupler

Actuate the tractor external hydraulic service to route oil through the test assembly. Adjust the adjustable

restrictor valve or engine speed to produce the standard flow of 30 l/min for category 1 tractors, or 50 l/min for category 2 or 3 tractors, as specified in ISO 730-1. Record the pressure near the coupler where oil is exiting from the tractor, the pressure near the coupler where oil is reentering the tractor, oil flow and reservoir oil temperature.

### 6.1.2.3 Flow into sump return port without coupler

Actuate the tractor external hydraulic service to route oil through the test assembly. Adjust the adjustable restrictor valve or engine speed to produce the standard flow of 30 l/min for category 1 tractors, or 50 l/min for category 2 or 3 tractors, as specified in ISO 730-1. Record the pressure near the coupler where oil is exiting from the tractor, the pressure near the coupler where oil is reentering the tractor, oil flow and reservoir oil temperature.

## 6.2 Peak pressure

### 6.2.1 Test conditions

The peak pressure shall be determined using a test assembly which is looped between a coupler pair (see figure 2). The test assembly shall consist of a double-acting cylinder without a cushion, and a pair of 2 500 mm  $\pm$  100 mm long sections of nominal 10 mm inside diameter hydraulic hose with male couplers conforming to ISO 5675 size 12,5 at each end. The cylinder dimensions shall be 80 mm  $\pm$  5 mm bore, 30 mm  $\pm$  5 mm rod and 200 mm  $\pm$  10 mm stroke. A pressure transducer and recording equipment capable of indicating a pressure rise rate of 700 MPa/s shall be connected within 100 mm of each male coupler connecting the hydraulic cylinder to the tractor.