Draft ETSI EN 301 489-50 V2.2.0 (2017-03)



ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 50: Specific conditions for Cellular Communication Base Station (BS), repeater and ancillary equipment; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

Reference

REN/ERM-EMC-379

Keywords

EMC, GSM, harmonised standard, LTE, MSR, OFDMA, WCDMA, WMAN

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from: http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services: https://portal.etsi.org/People/CommiteeSupportStaff.aspx

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2017.
All rights reserved.

DECT[™], **PLUGTESTS**[™], **UMTS**[™] and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP**[™] and **LTE**[™] are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intell	ectual Property Rights	5
Forev	word	5
Moda	al verbs terminology	5
1	Scope	6
2	References	6
2.1	Normative references	
2.2	Informative references.	
3	Definitions and abbreviations	
3.1	Definitions	
3.2	Abbreviations	11
4	Test conditions	12
4.1	General	12
4.2	Arrangements for test signals	13
4.2.0	General	13
4.2.1	Multiple enclosure BS solution	
4.2.2	Arrangements for test signals at the input of transmitters	14
4.2.3	Arrangements for test signals at the output of transmitters	14
4.2.4	Arrangements for test signals at the input of receivers	14
4.2.5	Arrangements for test signals at the input of receivers Arrangements for test signals at the output of receivers Arrangements for test signals for repeaters Exclusion bands Transmitter exclusion band Receiver exclusion band Narrow band responses of receivers Normal test modulation Test configurations for MSP MC and MR	14
4.2.6	Arrangements for test signals for repeaters	14
4.3	Exclusion bands.	14
4.3.1	Transmitter exclusion band	14
4.3.2	Receiver exclusion band	14
4.4	Narrow band responses of receivers.	15
4.5	Normal test modulation	13
4.6	Test configurations for MSR, MC and MB Performance assessment General	10
5	Performance assessment.	18
5.1	General	18
5.2	Equipment which can provide a continuous communication link	18
5.2.0	General	
5.2.1	Assessment of BLER/Throughput/BER/FER in Downlink	
5.2.1.0		
5.2.1.		
5.2.1.2		
5.2.2 5.2.2	Assessment of BLER/Throughput/BER/FER in Uplink	
5.2.2.0 5.2.2.1		
5.2.2 5.2.2.		
5.2.2 5.2.3	Assessment of RF gain variations of repeaters	
5.3	Equipment which does not provide a continuous communication link	
5.4	Ancillary equipment	
5.5	Equipment classification	
	• •	
6	Performance criteria	
6.1	Performance criteria for continuous phenomena applied to Base Stations and Repeaters	
6.1.1	Base Stations (BS)	
6.1.2	Repeaters Performance criteria for transient phenomena for Base Station and Repeaters	
6.2 6.2.1	Base stations (BS)	
6.2.2	Repeaters	
6.3	Performance criteria for ancillary equipment tested on a standalone basis	
6.3.0	General.	
6.3.1	Performance criteria for continuous phenomena for ancillary equipment	
6.3.2	Performance criteria for transient phenomena for ancillary equipment	

7	Applicability overvie	w tables	23
7.1			
7.1.1			
7.1.2		ns	
7.2	_		
7.2.1			
7.2.2	Special conditio	ns	24
Anne	ex A (informative):	Relationship between the present document and the essential requirements of Directive 2014/53/EU	25
Anne	ex B (informative):	Examples of base station radio equipment for digital cellular radio telecommunications systems within the scope of the present document	27
B.0	General		27
B.1	Base station equipme	ent for IMT-2000 CDMA Direct Spread (UTRA)	27
B.2	Base station equipme	ent for Evolved Universal Terrestrial Radio Access (E-UTRA)	27
B.3	GSM base station, an	cillary RF amplifiers, and GSM repeaters meeting Phase 2 and 2+	27
B.4	Other types of GSM	base station, ancillary RF amplifiers, and GSM repeaters equipment	28
B.5	Multi Standard Radio	o (MSR) Base station equipment	28
B.6	OFDMA WMAN Ba	se station equipment	28
B.7	OFDMA WMAN Ba	se station equipment	28
B.8	CDMA 1x spread spe	se station equipment	28
Anne	ex C (informative):	Bibliography Change history Change history	30
Anne	ex D (informative):	Change history will sale of the	31
	M D (Informative).	ile lets	
Histo	ry	iles ess	32
		Https://stantarte.itets.aliceselesse	

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This draft Harmonised European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI standards EN Approval Procedure.

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.15] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.1].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

The present document has been produced to rationalize the current ETSI EN 301 489 series [i.9] of EMC standards by collating the EMC requirements for Digital Cellular Communication Base Station (BS), repeater and ancillary Equipment into a single standard, there are no technical changes to product EMC Test requirements. The present document has been produced to replace ETSI EN 301 489-8 [i.9] (GSM/EDGE), ETSI EN 301 489-23 [i.9] (WCDMA and LTE, UTRA/E-UTRA), ETSI EN 301 489-26 [i.9] CDMA, 2000 1x and those parts of ETSI EN 301 489-4 [i.9] which pertain to OFDMA WMAN BS and to incorporate MSR and OFDMA WMAN.

The present document is part 50 of a multi-part deliverable. Full details of the entire series can be found in part [1].

Proposed national transposition dates		
Date of latest announcement of this EN (doa):	3 months after ETSI publication	
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa	
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa	

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document specifies technical characteristics and methods of measurements for equipment the following equipment types:

- 1) digital cellular base station equipment;
- 2) repeaters;
- 3) associated ancillary equipment.

Including individually and combinations of:

- UTRA, WCDMA (IMT-2000 Direct Spread, W-CDMA, UMTS);
- E-UTRA, LTE (IMT-2000 and IMT advanced);
- GSM (IMT-2000 SC, Technology GSM/EDGE);
- MSR (IMT-2000 and IMT advanced, combination of technologies above);
- OFDMA WMAN (IMT-2000 OFDMA, OFDMA WMAN);
- CDMA (CDMA2000 IMT MC, CDMA2000 1X).

Technical specifications related to the antenna port and emissions from the enclosure port of radio equipment (base station (BS), and repeaters) are not included in the present document. Such technical specifications are found in the relevant product standards for the effective use of the radio spectrum.

Examples of base station equipment covered by the present document are given in annex B.

In case of differences (for instance concerning special conditions, definitions, abbreviations) between the present document and ETSI EN 301 489-1 [1], the provisions of the present document take precedence.

The present document covers the essential requirements of article 3.1(b) of Directive 2014/53/EU under the conditions identified in annex A.

Technical specifications related to the antenna port of radio equipment and radiated emissions from the enclosure port of radio equipment and combinations of radio and associated ancillary equipment are given in the harmonised product standards ETSI EN 301 908-1 [28] or ETSI EN 301 502 [8] for the effective and efficient use of the radio spectrum.

2 References

2.1 Normative references


References are specific, identified by date of publication and/or edition number or version number. Only the cited version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at http://docbox.etsi.org/Reference.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

[1] ETSI EN 301 489-1 (V2.2.0) (03-2017): "ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU".

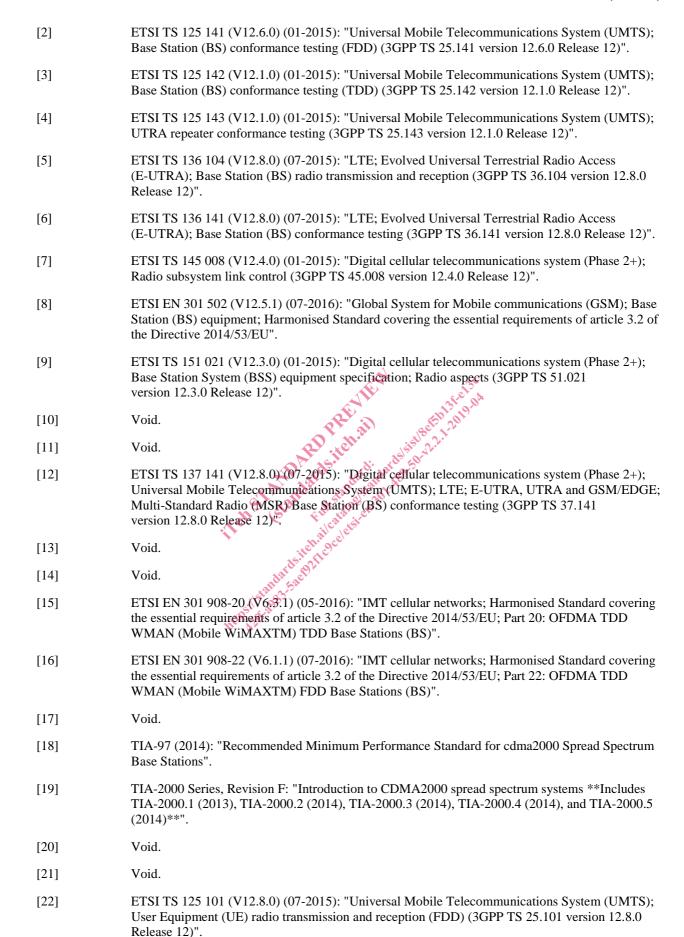

- [23] ETSI TS 125 102 (V12.0.0) (10-2014): "Universal Mobile Telecommunications System (UMTS); User Equipment (UE) radio transmission and reception (TDD) (3GPP TS 25.102 version 12.0.0 Release 12)".
- [24] ETSI TS 136 101 (V12.8.0) (09-2015): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception (3GPP TS 36.101 version 12.8.0 Release 12)".
- [25] ETSI TS 136 143 (V12.1.0) (02-2015): "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); FDD repeater conformance testing (3GPP TS 36.143 version 12.1.0 Release 12)".
- [26] ETSI TS 151 010-1 (V12.4.0) (06-2015): "Digital cellular telecommunications system (Phase 2+); Mobile Station (MS) conformance specification; Part 1: Conformance specification (3GPP TS 51.010-1 version 12.4.0 Release 12)".
- [27] ETSI TS 137 113 (V12.3.0) (02-2015): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; E-UTRA, UTRA and GSM/EDGE; Multi-Standard Radio (MSR) Base Station (BS) Electromagnetic Compatibility (EMC) (3GPP TS 37.113 version 12.3.0 Release 12)".
- [28] ETSI EN 301 908-1 (V11.1.1) (07-2016): "IMT cellular networks; Harmonised Standard covering the essential requirements of article 3.2 of the Directive 2014/53/EU; Part 1: Introduction and common requirements".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.
- [i.2] ETSI TS 137 104 (V12.8.0) (07-2015): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; E-UTRA, UTRA and GSM/EDGE; Multi-Standard Radio (MSR) Base Station (BS) radio transmission and reception (3GPP TS 37.104 version 12.8.0 Release 12)".
- [i.3] ETSI TS 125 104: "Universal Mobile Telecommunications System (UMTS); Base Station (BS) radio transmission and reception (FDD) (3GPP TS 25.104)".
- [i.4] ETSI TS 125 105: "Universal Mobile Telecommunications System (UMTS); Base Station (BS) radio transmission and reception (TDD) (3GPP TS 25.105)".
- [i.5] ETSI TS 125 106: "Universal Mobile Telecommunications System (UMTS); UTRA repeater radio transmission and reception (3GPP TS 25.106)".
- [i.6] ETSI TS 136 106: "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); FDD repeater radio transmission and reception (3GPP TS 36.106)".
- [i.7] ETSI EN 301 908-5 (V5.2.1) (09-2011): "IMT cellular networks; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive; Part 5: CDMA Multi-Carrier (cdma2000) Base Stations (BS)".

[i.8]	ETSI EN 301 908-7 (V4.2.1) (03-2010): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS), Repeaters and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 7: Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD and E-UTRA TDD) (BS) covering the essential requirements of article 3.2 of the R&TTE Directive".
[i.9]	ETSI EN 301 489 (all parts): "ElectroMagnetic Compatibility (EMC) standard for radio equipment

- [i.9] ETSI EN 301 489 (all parts): "ElectroMagnetic Compatibility (EMC) standard for radio equipment and services".
- [i.10] ETSI EN 302 544-1 (V1.1.2) (01-2010): "Broadband Data Transmission Systems operating in the 2 500 MHz to 2 690 MHz frequency band; Part 1: TDD Base Stations; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive".
- [i.11] ETSI EN 301 449 (V1.1.1) (07-2006): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Harmonized EN for CDMA spread spectrum base stations operating in the 450 MHz cellular band (CDMA 450) and 410, 450 and 870 MHz PAMR bands (CDMA-PAMR) covering essential requirements of article 3.2 of the R&TTE Directive".
- [i.12] ETSI EN 302 426 (V1.1.1) (09-2006): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Harmonized EN for CDMA spread spectrum Repeaters operating in the 450 MHz cellular band (CDMA450) and the 410 MHz, 450 MHz and 870 MHz PAMR bands (CDMA-PAMR) covering essential requirements of article 3.2 of the R&TTE Directive".
- [i.13] Void
- [i.14] Recommendation ITU-R SM.329-12: "Unwanted emissions in the spurious domain".
- [i.15] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ETSI EN 301 489-1 [1] and the following apply:

abis interface: logical interface between a BTS and a BSC

bearer: information transmission path of defined characteristics for transfer of user data or predefined test data

CDMA 1x Spread Spectrum: wireless air interface standard for spread-spectrum technology with a spreading rate 1

CDMA-PAMR: Public Access Mobile Radio system based on TIA-2000 [19] Spreading Rate 1 specifications

channel bandwidth: RF bandwidth supporting a single E-UTRA RF carrier with the transmission bandwidth configured in the uplink or downlink of a cell

NOTE: The channel bandwidth is measured in MHz and is used as a reference for transmitter and receiver RF requirements.

forward CDMA channel: CDMA channel from a base station to mobile stations

NOTE: The forward CDMA channel contains one or more code channels that are transmitted on a CDMA frequency assignment using a particular pilot PN offset.

International Mobile Telecommunications-2000 (IMT-2000): third generation mobile systems which provide access, by means of one or more radio links, to a wide range of telecommunications services supported by the fixed telecommunication networks (e.g. PSTN, ISDN or IP), and to other services which are specific to mobile users

maximum throughput: maximum achievable throughput for a reference measurement channel

MB Base Station: Multi-Band Base Station characterized by the ability of its transmitter and/or receiver to process two or more carriers in common active RF components simultaneously, where at least one carrier is configured at a different non-overlapping operating band than the other carrier(s)

MSR Base Station: Base Station characterized by the ability of its receiver and transmitter to process two or more carriers in common active RF components simultaneously in a declared RF bandwidth, where at least one carrier is of a different RAT than the other carrier(s)

necessary bandwidth: As defined in Recommendation ITU-R SM.329-12 [i.14], clause 1.4.

Radio Configuration (RC): set of Forward Traffic Channel and Reverse Traffic Channel transmission formats that are characterized by physical layer parameters such as transmission rates, modulation characteristics, and spreading rate

radio digital unit: equipment which contains base band and functionality for controlling Radio unit

NOTE: See figures 1a and 1b.

radio equipment: equipment which contains Radio digital unit and Radio unit

NOTE: See figures 1a and 1b.

radio unit: equipment which contains transmitter and receiver

NOTE: See figures 1a and 1b.

repeater: device with two RF ports, both of which are intended to be connected to antennas, which is capable of receiving, amplifying and transmitting simultaneously in one direction a signal in a BSS transmit band and in the other direction a signal in the corresponding BSS receive band

reverse CDMA channel: CDMA channel from the mobile station to the base station

NOTE: From the base station's perspective, the Reverse CDMA Channel is the sum of all mobile station transmissions on a CDMA frequency assignment.

RXQUAL: measure of the received signal quality, which is generated by the base station for use as a criterion in the RF power control and handover processes

NOTE: The characteristics and requirements are specified in ETSI TS 145 008 [7], clause 8.2.

throughput: number of payload bits successfully received per second for a reference measurement channel in a specified reference condition

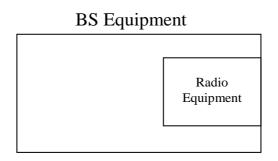


Figure 1a: BS with single enclosure solution

Radio Equipment Radio Equipment Radio digital unit Radio unit

Figure 1b: BS with multiple enclosure solution

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AC **Alternating Current ARFCN** Absolute Radio Frequency Channel Number **BER** Bit Error Ratio **BLER Block Error Ratio** BS **Base Station BSC Base Station Controller** BSS Base Station System **BTS Base Transceiver Station** $\mathrm{BW}_{\mathrm{Channel}}$ Channel bandwidth **CDMA** Code Division Multiple Access Contiguous and Non-Contiguous operation **CNC CRC** Cyclic Redundancy Check

CRC Cyclic Redundancy Check
CS Capability Set
DC Direct Current

DCS Digital Cellular System

EARFCN E-UTRA Absolute Radio Frequency Channel Number

EMC ElectroMagnetic Compatibility

EPC Evolved Packet Core

EUT Equipment Under Test

E-UTRA Evolved Universal Terrestrial Radio Access

FDD Frequency Division Duplex

FER Frame Error Rate

FRC Fixed Reference Channel

GSM Global System for Mobile communication

HW HardWare

IF Intermediate Frequency

IMT International Mobile Telecommunications
IMT-2000 International Mobile Telecommunications 2000

IP Internet Protocol

ISDN Integrated Services Digital Network Iub Interface between RNC and BS

LTE Long Term Evolution

MB Multi-Band
MC Multi-Carrier
MSR Multi Standard Radio
NC Non-Contiguous operation

OFDMA Orthogonal Frequency-Division Multiple Access

PAMR Public Access Mobile Radio PN Pseudorandom Number

PSTN Public Switched Telephone Network

RAT Radio Access Technology RC Radio Configuration RF Radio Frequency