
**ISO inch screw threads — Basic
dimensions**

Filetages ISO en inches — Dimensions de base

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 725:2009

<https://standards.iteh.ai/catalog/standards/sist/889df472-6fa3-42ed-9182-be8bb5ba3767/iso-725-2009>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 725:2009

<https://standards.iteh.ai/catalog/standards/sist/889df472-6fa3-42ed-9182-be8bb5ba3767/iso-725-2009>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Symbols	1
3 Basic dimensions	2
Bibliography	14

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 725:2009

<https://standards.iteh.ai/catalog/standards/sist/889df472-6fa3-42ed-9182-be8bb5ba3767/iso-725-2009>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 725 was prepared by Technical Committee ISO/TC 1, *Screw threads*.

This second edition results from the reinstatement of ISO 725:1978, which was withdrawn in 2000 and with which it is technically identical.

ITEH STANDARD PREVIEW
(standards.iteh.ai)
ISO 725:2009
<https://standards.iteh.ai/catalog/standards/sist/889df472-6fa3-42ed-9182-be8bb5ba3767/iso-725-2009>

ISO inch screw threads — Basic dimensions

1 Scope

This International Standard specifies the basic dimensions, in inches, of ISO inch screw threads in accordance with ISO 263. The values refer to the basic profile in accordance with ISO 68-2.

2 Symbols

D basic major diameter of internal thread (nominal diameter)

d basic major diameter of external thread (nominal diameter)

D_2 basic pitch diameter of internal thread

d_2 basic pitch diameter of external thread

D_1 basic minor diameter of internal thread

d_1 basic minor diameter of external thread

H height of fundamental triangle

n number of threads per inch (25,4 mm)

3 Basic dimensions

Dimensions shall be in accordance with Figure 1 and given in Table 1.

The values of D_2 , d_2 , D_1 and d_1 have been calculated from the following equations and rounded, in Table 1, to the fourth decimal place:

$$D_2 = D - 2 \times \frac{3}{8} H = D - \frac{0,649\,519}{n}$$


$$d_2 = d - 2 \times \frac{3}{8} H = d - \frac{0,649\,519}{n}$$

$$D_1 = D - 2 \times \frac{5}{8} H = D - \frac{1,082\,532}{n}$$

$$d_1 = d - 2 \times \frac{5}{8} H = d - \frac{1,082\,532}{n}$$

where

$$H = 0,866\,025\,40/n$$

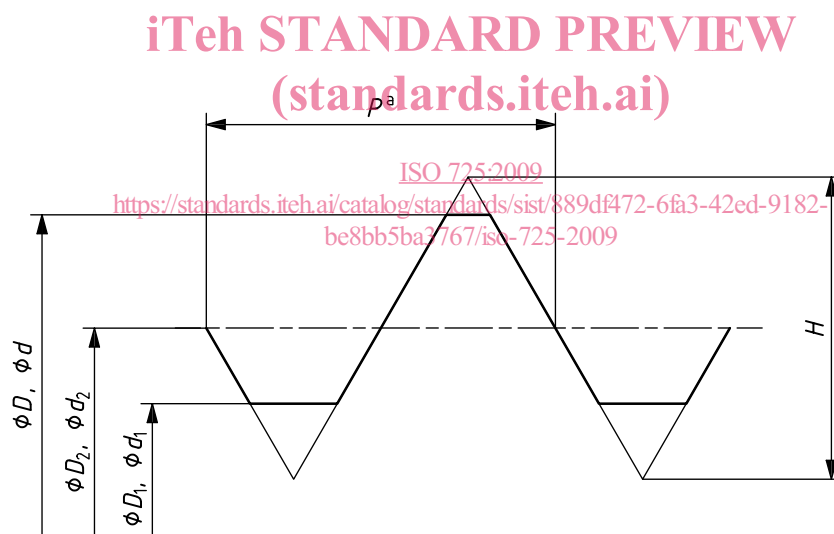

^a Pitch, $P = 1/n$.

Figure 1 — Basic dimensions

Table 1 — Basic dimensions

Size	Major diameter D, d in	Number of threads per inch n	Thread series	Pitch diameter D_2, d_2 in	Minor diameter D_1, d_1 in
No. 0	0,060 0	80	UNF	0,051 9	0,046 5
No. 1	0,073 0	64	UNC	0,062 9	0,056 1
		72	UNF	0,064 0	0,058 0
No. 2	0,086 0	56	UNC	0,074 4	0,066 7
		64	UNF	0,075 9	0,069 1
No. 3	0,099 0	48	UNC	0,085 5	0,076 4
		56	UNF	0,087 4	0,079 7
No. 4	0,112 0	40	UNC	0,095 8	0,084 9
		48	UNF	0,098 5	0,089 4
No. 5	0,125 0	40	UNC	0,108 8	0,097 9
		44	UNF	0,110 2	0,100 4
No. 6	0,138 0	32	UNC	0,117 7	0,104 2
		40	UNF	0,121 8	0,110 9
No. 8	0,164 0	32	UNC	0,143 7	0,130 2
		36	UNF	0,146 0	0,133 9
No. 10	0,190 0	24	UNC	0,162 9	0,144 9
		32	UNF	0,169 7	0,156 2
No. 12	0,216 0	24	UNC	0,188 9	0,170 9
		28	UNF	0,192 8	0,177 3
		32	UNEF	0,195 7	0,182 2
1/4	0,250 0	20	UNC	0,217 5	0,195 9
		28	UNF	0,226 8	0,211 3
		32	UNEF	0,229 7	0,216 2
5/16	0,312 5	18	UNC	0,276 4	0,252 4
		20	UN	0,280 0	0,258 4
		24	UNF	0,285 4	0,267 4
		28	UN	0,289 3	0,273 8
		32	UNEF	0,292 2	0,278 7
3/8	0,375 0	16	UNC	0,334 4	0,307 3
		20	UN	0,342 5	0,320 9
		24	UNF	0,347 9	0,329 9
		28	UN	0,351 8	0,336 3
		32	UNEF	0,354 7	0,341 2

Table 1 (continued)

Size	Major diameter D, d in	Number of threads per inch n	Thread series	Pitch diameter D_2, d_2 in	Minor diameter D_1, d_1 in
7/16	0,437 5	14	UNC	0,391 1	0,360 2
		16	UN	0,396 9	0,369 8
		20	UNF	0,405 0	0,383 4
		28	UNEF	0,414 3	0,398 8
		32	UN	0,417 2	0,403 7
1/2	0,500 0	13	UNC	0,450 0	0,416 7
		16	UN	0,459 4	0,432 3
		20	UNF	0,467 5	0,445 9
		28	UNEF	0,476 8	0,461 3
		32	UN	0,479 7	0,466 2
9/16	0,562 5	12	UNC	0,508 4	0,472 3
		16	UN	0,521 9	0,494 8
		18	UNF	0,526 4	0,502 4
		20	UN	0,530 0	0,508 4
		24	UNEF	0,535 4	0,517 4
		28	UN	0,539 3	0,523 8
		32	UN	0,542 2	0,528 7
5/8	0,625 0	11	UNC	0,566 0	0,526 6
		12	UN	0,570 9	0,534 8
		16	UN	0,584 4	0,557 3
		18	UNF	0,588 9	0,564 9
		20	UN	0,592 5	0,570 9
		24	UNEF	0,597 9	0,579 9
		28	UN	0,601 8	0,586 3
		32	UN	0,604 7	0,591 2
11/16	0,687 5	12	UN	0,633 4	0,597 3
		16	UN	0,646 9	0,619 8
		20	UN	0,655 0	0,633 4
		24	UNEF	0,660 4	0,642 4
		28	UN	0,664 3	0,648 8
		32	UN	0,667 2	0,653 7

Table 1 (continued)

Size	Major diameter D, d in	Number of threads per inch n	Thread series	Pitch diameter D_2, d_2 in	Minor diameter D_1, d_1 in
3/4	0,750 0	10	UNC	0,685 0	0,641 7
		12	UN	0,695 9	0,659 8
		16	UNF	0,709 4	0,682 3
		20	UNEF	0,717 5	0,695 9
		28	UN	0,726 8	0,711 3
		32	UN	0,729 7	0,716 2
13/16	0,812 5	12	UN	0,758 4	0,722 3
		16	UN	0,771 9	0,744 8
		20	UNEF	0,780 0	0,758 4
		28	UN	0,789 3	0,773 8
		32	UN	0,792 2	0,778 7
7/8	0,875 0	9	UNC	0,802 8	0,754 7
		12	UN	0,820 9	0,784 8
		14	UNF	0,828 6	0,797 7
		16	UN	0,834 4	0,807 3
		20	UNEF	0,842 5	0,820 9
		28	UN	0,851 8	0,836 3
15/16	0,937 5	32	UN	0,854 7	0,841 2
		12	UN	0,883 4	0,847 3
		16	UN	0,896 9	0,869 8
		20	UNEF	0,905 0	0,883 4
		28	UN	0,914 3	0,898 8
1	1,000 0	32	UN	0,917 2	0,903 7
		8	UNC	0,918 8	0,864 7
		12	UNF	0,945 9	0,909 8
		16	UN	0,959 4	0,932 3
		20	UNEF	0,967 5	0,945 9
		28	UN	0,976 8	0,961 3
1 1/16	1,062 5	32	UN	0,979 7	0,966 2
		8	UN	0,981 3	0,927 2
		12	UN	1,008 4	0,972 3
		16	UN	1,021 9	0,994 8
		18	UNEF	1,026 4	1,002 4
		20	UN	1,030 0	1,008 4
		28	UN	1,039 3	1,023 8

Table 1 (continued)

Size	Major diameter D, d in	Number of threads per inch n	Thread series	Pitch diameter D_2, d_2 in	Minor diameter D_1, d_1 in
1 1/8	1,125 0	7	UNC	1,032 2	0,970 4
		8	UN	1,043 8	0,989 7
		12	UNF	1,070 9	1,034 8
		16	UN	1,084 4	1,057 3
		18	UNEF	1,088 9	1,064 9
		20	UN	1,092 5	1,070 9
		28	UN	1,101 8	1,086 3
1 3/16	1,187 5	8	UN	1,106 3	1,052 2
		12	UN	1,133 4	1,097 3
		16	UN	1,146 9	1,119 8
		18	UNEF	1,151 4	1,127 4
		20	UN	1,155 0	1,133 4
		28	UN	1,164 3	1,148 8
1 1/4	1,250 0	7	UNC	1,157 2	1,095 4
		8	UN	1,168 8	1,114 7
		12	UNF	1,195 9	1,159 8
		16	UN	1,209 4	1,182 3
		18	UNEF	1,213 9	1,189 9
		20	UN	1,217 5	1,195 9
		28	UN	1,226 8	1,211 3
1 5/16	1,312 5	8	UN	1,231 3	1,177 2
		12	UN	1,258 4	1,222 3
		16	UN	1,271 9	1,244 8
		18	UNEF	1,276 4	1,252 4
		20	UN	1,280 0	1,258 4
		28	UN	1,289 3	1,273 8
1 3/8	1,375 0	6	UNC	1,266 7	1,194 6
		8	UN	1,293 8	1,239 7
		12	UNF	1,320 9	1,284 8
		16	UN	1,334 4	1,307 3
		18	UNEF	1,338 9	1,314 9
		20	UN	1,342 5	1,320 9
		28	UN	1,351 8	1,336 3

Table 1 (continued)

Size	Major diameter D, d in	Number of threads per inch n	Thread series	Pitch diameter D_2, d_2 in	Minor diameter D_1, d_1 in
1 7/16	1,437 5	6	UN	1,329 2	1,257 1
		8	UN	1,356 3	1,302 2
		12	UN	1,383 4	1,347 3
		16	UN	1,396 9	1,369 8
		18	UNEF	1,401 4	1,377 4
		20	UN	1,405 0	1,383 4
		28	UN	1,414 3	1,398 8
1 1/2	1,500 0	6	UNC	1,391 7	1,319 6
		8	UN	1,418 8	1,364 7
		12	UNF	1,445 9	1,409 8
		16	UN	1,459 4	1,432 3
		18	UNEF	1,463 9	1,439 9
		20	UN	1,467 5	1,445 9
		28	UN	1,476 8	1,461 3
1 9/16	1,562 5	6	UN	1,454 2	1,382 1
		8	UN	1,481 3	1,427 2
		12	UN	1,508 4	1,472 3
		16	UN	1,521 9	1,494 8
		18	UNEF	1,526 4	1,502 4
		20	UN	1,530 0	1,508 4
1 5/8	1,625 0	6	UN	1,516 7	1,444 6
		8	UN	1,543 8	1,489 7
		12	UN	1,570 9	1,534 8
		16	UN	1,584 4	1,557 3
		18	UNEF	1,588 9	1,564 9
		20	UN	1,592 5	1,570 9
1 11/16	1,687 5	6	UN	1,579 2	1,507 1
		8	UN	1,606 3	1,552 2
		12	UN	1,633 4	1,597 3
		16	UN	1,646 9	1,619 8
		18	UNEF	1,651 4	1,627 4
		20	UN	1,655 0	1,633 4