

---

---

**Electrically propelled road vehicles —  
Test specification for lithium-ion traction  
battery packs and systems —**

**Part 1:  
High-power applications**

**iTeh STANDARD PREVIEW**  
*Véhicules routiers à propulsion électrique — Spécifications d'essai pour  
packs et systèmes de batterie de traction aux ions lithium —  
(standards.iteh.ai)  
Partie 1. Applications à haute puissance*

ISO 12405-1:2011

<https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011>



**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 12405-1:2011

<https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword .....	iv
Introduction.....	v
<b>1</b> <b>Scope</b> .....	<b>1</b>
<b>2</b> <b>Normative references</b> .....	<b>1</b>
<b>3</b> <b>Terms and definitions</b> .....	<b>2</b>
<b>4</b> <b>Symbols and abbreviated terms</b> .....	<b>4</b>
4.1 <b>Symbols</b> .....	4
4.2 <b>Abbreviated terms</b> .....	5
<b>5</b> <b>General requirements</b> .....	<b>5</b>
5.1 <b>General conditions</b> .....	5
5.2 <b>Test sequence plan</b> .....	6
5.3 <b>Tests</b> .....	6
5.4 <b>Battery pack — Typical configuration</b> .....	8
5.5 <b>Battery system — Typical configuration</b> .....	8
5.6 <b>Preparation of battery pack and system for bench testing</b> .....	11
<b>6</b> <b>General tests</b> .....	<b>11</b>
6.1 <b>Preconditioning cycles</b> .....	11
6.2 <b>Standard cycle</b> .....	12
<b>7</b> <b>Performance tests</b> .....	<b>12</b>
7.1 <b>Energy and capacity at room temperature</b> .....	12
7.2 <b>Energy and capacity at different temperatures and discharge rates</b> .....	14
7.3 <b>Power and internal resistance</b> .....	17
7.4 <b>No-load SOC loss</b> .....	22
7.5 <b>SOC loss at storage</b> .....	24
7.6 <b>Cranking power at low temperature</b> .....	26
7.7 <b>Cranking power at high temperature</b> .....	27
7.8 <b>Energy efficiency</b> .....	29
7.9 <b>Cycle life</b> .....	31
<b>8</b> <b>Reliability tests</b> .....	<b>38</b>
8.1 <b>Dewing — Temperature change</b> .....	38
8.2 <b>Thermal shock cycling</b> .....	40
8.3 <b>Vibration</b> .....	40
8.4 <b>Mechanical shock</b> .....	45
<b>9</b> <b>Abuse tests</b> .....	<b>46</b>
9.1 <b>Information</b> .....	46
9.2 <b>Short-circuit protection</b> .....	46
9.3 <b>Overcharge protection</b> .....	47
9.4 <b>Overdischarge protection</b> .....	48
<b>Annex A (informative) Battery pack and system and overview on tests</b> .....	<b>49</b>
<b>Annex B (informative) Examples of data sheet for battery pack and system testing</b> .....	<b>53</b>
<b>Annex C (informative) Example of test conditions</b> .....	<b>57</b>
<b>Bibliography</b> .....	<b>58</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 12405-1 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 21, *Electrically propelled road vehicles*.

ISO 12405 consists of the following parts, under the general title *Electrically propelled road vehicles — Test specification for lithium-ion traction battery systems*:

— *Part 1: High-power applications*

— *Part 2: High-energy applications*

[ISO 12405-1:2011](https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011)

<https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011>

## Introduction

Lithium-ion-based battery systems are an efficient alternative energy storage system for electrically propelled vehicles. The requirements for lithium-ion based battery systems for use as a power source for the propulsion of electric road vehicles are significantly different from those batteries used for consumer electronics or stationary usage.

This part of ISO 12405 provides specific test procedures for lithium-ion battery packs and systems specially developed for propulsion of road vehicles. This part of ISO 12405 specifies such tests and related requirements to ensure that a battery pack or system is able to meet the specific needs of the automobile industry. It enables vehicle manufactures to choose test procedures to evaluate the characteristics of a battery pack or system for their specific requirements.

A coordination of test specifications for battery cells, packs and systems for automotive application is necessary for the practical usage of standards.

For specifications for battery cells, see IEC 62660-1 and IEC 62660-2.

Some tests as prescribed within this specification are based on existing specifications, i.e. *USABC*, *EUCAR*, *FreedomCAR* and other sources.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 12405-1:2011](https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011)

<https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 12405-1:2011

<https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011>

# Electrically propelled road vehicles — Test specification for lithium-ion traction battery packs and systems —

## Part 1: High-power applications

### 1 Scope

This part of ISO 12405 specifies test procedures for lithium-ion battery packs and systems for use in electrically propelled road vehicles.

The specified test procedures enable the determination of the essential characteristics of performance, reliability and abuse of lithium-ion battery packs and systems. They assist the user of this part of ISO 12405 to compare the test results achieved for different battery packs or systems.

Therefore, this part of ISO 12405 specifies standard test procedures for basic characteristics of performance, reliability and abuse of lithium-ion battery packs and systems.

This part of ISO 12405 enables the setting up of a dedicated test plan for an individual battery pack or system subject to agreement between the customer and supplier. If required, the relevant test procedures and/or test conditions of lithium-ion battery packs and systems can be selected from the standard tests provided in this part of ISO 12405 to configure a dedicated test plan.

This part of ISO 12405 specifies tests for high-power battery packs and systems.

NOTE 1 Typical applications for high-power battery packs and systems are hybrid electric vehicles (HEVs) and fuel cell vehicles (FCVs).

NOTE 2 Testing on cell level is specified in IEC 62660-1 and IEC 62660-2.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6469-1, *Electrically propelled road vehicles — Safety specifications — Part 1: On-board rechargeable energy storage system (RESS)*

ISO 6469-3, *Electrically propelled road vehicles — Safety specifications — Part 3: Protection of persons against electric shock*

ISO 16750-1, *Road vehicles — Environmental conditions and testing for electrical and electronic equipment — Part 1: General*

ISO 16750-3, *Road vehicles — Environmental conditions and testing for electrical and electronic equipment — Part 3: Mechanical loads*

ISO 16750-4: *Road vehicles — Environmental conditions and testing for electrical and electronic equipment — Part 4: Climatic loads*

IEC 60068-2-30, *Environmental testing — Part 2-30: Tests — Test Db: Damp heat, cyclic (12 h + 12 h cycle)*

IEC 60068-2-47 *Environmental testing — Part 2-47: Test — Mounting of specimens for vibration, impact and similar dynamic tests*

IEC 60068-2-64:2008, *Environmental testing — Part 2-64: Tests — Test Fh: Vibration, broadband random and guidance*

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

**3.1**  
**battery control unit**  
**BCU**  
electronic device that controls, manages, detects or calculates electric and thermal functions of the battery system and that provides communication between the battery system and other vehicle controllers

NOTE See 5.5.1 for further explanation.

**3.2**  
**battery pack**  
energy storage device that includes cells or cell assemblies normally connected with cell electronics, voltage class B circuit and overcurrent shut-off device, including electrical interconnections, interfaces for external systems

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO 12405-1:2011

NOTE 1 For further explanation, see 5.4 and A.2  
<https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011>

NOTE 2 Examples of external systems are cooling, voltage class B, auxiliary voltage class A and communication.

**3.3**  
**battery system**  
energy storage device that includes cells or cell assemblies or battery pack(s) as well as electrical circuits and electronics

NOTE 1 For further explanation, see 5.5.2, 5.5.3, A.3.1 and A.3.2. Battery system components can also be distributed in different devices within the vehicle.

NOTE 2 Examples of electronics are the BCU and contactors.

**3.4**  
**capacity**  
*C*  
electrical charge that can be delivered from a battery pack or system under specified conditions

NOTE The capacity is often expressed in ampere-hours (A·h), where 1 A·h = 3 600 *C*.

**3.5**  
**cell electronics**  
electronic device that collects and possibly monitors thermal and electric data of cells or cell assemblies and contains electronics for cell balancing, if necessary

NOTE The cell electronics may include a cell controller. The functionality of cell balancing may be controlled by the cell electronics or by the BCU.



**3.6****customer**

party that is interested in using the battery pack or system and, therefore, orders or performs the test

EXAMPLE A vehicle manufacturer.

**3.7****energy density**

amount of stored energy related to the battery pack or system volume

NOTE 1 The battery pack or system includes the cooling system, if any, to the point of a reversible attachment of the coolant lines or air ducts, respectively.

NOTE 2 Energy density is expressed in watt hours per litre (W·h/l).

**3.8****energy round-trip efficiency**

ratio of the net d.c. energy delivered by a DUT during a discharge test to the total d.c. energy required to restore the initial SOC by a standard charge

NOTE The net d.c. energy is expressed as watt hours (W·h) discharge and the total d.c. energy is expressed as watt hours (W·h) charge.

**3.9****high-energy application**

characteristic of device or application, for which the numerical ratio between maximum allowed electric power output and electric energy output at a 1 C discharge rate at room temperature for a battery pack or system is typically lower than 10

NOTE 1 Typically high-energy battery packs and systems are designs for applications in BEVs.

NOTE 2 The allowed electric power output is expressed as power in watts (W) and the electric energy output is expressed as energy in watt hours (W·h).

**3.10****high-power application**

characteristic of device or application, for which the numerical ratio between maximum allowed electric power output and electric energy output at a 1 C discharge rate at room temperature for a battery pack or system is typically equal to or higher than 10

NOTE 1 Typically high-power battery packs and systems are designs for applications in HEVs and FCVs.

NOTE 2 The allowed electric power output is expressed as power in watts (W) and the electric energy output is expressed as energy in watt hours (W·h).

**3.11****maximum working voltage**

highest value of a.c. voltage (r.m.s) or of d.c. voltage which may occur in an electrical system under any normal operating conditions according to the manufacturer's specifications, disregarding transients

**3.12****rated capacity**

supplier's specification of the total number of ampere hours that can be withdrawn from a fully charged battery pack or system for a specified set of test conditions, such as discharge rate, temperature and discharge cut-off voltage

**3.13****room temperature**

$T_{\text{room}}$

temperature of  $(25 \pm 2)$  °C

**3.14**  
**sign of battery current**

discharge current is specified as positive and the charge current as negative

**3.15**  
**specific energy**

amount of stored energy related to the battery pack or system mass

NOTE 1 The battery pack or system includes the cooling system, if any, to the point of a reversible attachment of the coolant lines or air ducts, respectively. For liquid-cooled systems, the coolant mass inside the battery pack or system is included.

NOTE 2 Specific energy is expressed in watt hours per kilogram (W·h/kg).

**3.16**  
**state of charge**

**SOC**  
available capacity in a battery pack or system

NOTE State of charge is expressed as a percentage of rated capacity.

**3.17**  
**supplier**

party that provides battery systems and packs

EXAMPLE A battery manufacturer.

ITeH STANDARD PREVIEW  
(standards.iteh.ai)

**3.18**  
**voltage class A**

classification of an electric component or circuit with a maximum working voltage of ≤ 30 V a.c. or ≤ 60 V d.c., respectively

<https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011>

NOTE For more details, see ISO 6469-3.

**3.19**  
**voltage class B**

classification of an electric component or circuit with a maximum working voltage of (> 30 and ≤ 1000) V a.c. or (> 60 and ≤ 1500) V d.c., respectively

NOTE For more details, see ISO 6469-3.

**4 Symbols and abbreviated terms**

**4.1 Symbols**

Symbol	Description	Unit
$C_{fade}$	Capacity fade	percentage
$C_{rttx}$	1 C (rated) capacity at current test	A·h
$C_{rtt0}$	Rated 1 C capacity at BOL	A·h
$I_{charge}$	Charge current	A
$I_{discharge}$	Discharge current	A
$I_{d,max}$	Maximum discharge current, specified by the manufacturer for energy and capacity testing	A
$I_{dp,max}$	Maximum discharge pulse current, specified by the manufacturer for power, internal resistance and energy efficiency testing	A

$T_{\max}$	Maximum operating temperature	°C
$T_{\min}$	Minimum operating temperature	°C
$T_{\text{room}}$	Room temperature	°C
$t$	Time	s
$\eta$	Efficiency	%

## 4.2 Abbreviated terms

BOL	Beginning of life
DUT	Device under test
EODV	End of discharge voltage
EUCAR	European Council for Automotive Research and Development
IEC	International Electrotechnical Commission
ISO	International Organization for Standardization
OCV	Open circuit voltage
PNGV	Partnership for a New Generation of Vehicles
PSD	Power spectral density
RESS	Rechargeable energy storage system
r.m.s	root-mean-square
SC	Standard cycle
SCH	Standard charge
SDCH	Standard discharge
SOC	State of charge
USABC	United States Advanced Battery Consortium

## 5 General requirements

### 5.1 General conditions

#### 5.1.1 Prerequisites

A battery pack or system tested in accordance with this part of ISO 12405 shall fulfil the following requirements.

- The electrical safety design shall be approved in accordance with the requirements given in ISO 6469-1 and ISO 6469-3.
- The necessary documentation for operation and required interface parts for connection to the test equipment (i.e. connectors, plugs, including cooling) shall be delivered together with the DUT.

A battery system shall enable the specified tests, i.e. via specified test modes implemented in the BCU, and shall be able to communicate with the test bench via common communication buses.

The battery pack subsystem as a DUT shall comprise all parts specified by the customer (e.g. including mechanical and electrical connecting points for mechanical test).

## ISO 12405-1:2011(E)

If not otherwise specified, before each test, the DUT shall be equilibrated at the test temperature. The thermal equilibration is reached, if during a period of 1 h without active cooling, the deviations between test temperature and temperature of all cell temperature measuring points are lower than  $\pm 2$  K.

If not otherwise specified, each charge and each SOC change shall be followed by a rest period of 30 min.

### 5.1.2 Accuracy of measurement equipment and measured values

The accuracy of external measurement equipment shall be at least within the following tolerances:

- a) voltage  $\pm 0,5$  %;
- b) current  $\pm 0,5$  %;
- c) temperature  $\pm 1$  K.

The overall accuracy of externally controlled or measured values, relative to the specified or actual values, shall be at least within the following tolerances:

- voltage  $\pm 1$  %;
- current  $\pm 1$  %;
- temperature  $\pm 2$  K;
- time  $\pm 0,1$  %;
- mass  $\pm 0,1$  %;
- dimensions  $\pm 0,1$  %.

ITeH STANDARD PREVIEW  
(standards.iteh.ai)

ISO 12405-1:2011

All values (time, temperature, current and voltage) shall be noted at least every 5 % of the estimated discharge and charge time, except if it is noted otherwise in the individual test procedure.

### 5.2 Test sequence plan

The test sequence for an individual battery pack or system, or a battery pack subsystem shall be based on agreement between the customer and supplier with consideration of tests in 5.3.

An example of a list of test conditions to be agreed between the customer and supplier is provided in Table C.1.

### 5.3 Tests


An overview of the tests is given in Figure 1, where the references to the specific subclauses are also given.

Overview of tests			
General tests (Clause 6)	Performance tests (Clause 7)	Reliability tests (Clause 8)	Abuse tests (Clause 9)
Preconditioning cycles (6.1)	Energy and capacity at RT (7.1)	Dewing (8.1)	Short-circuit protection (9.2)
Standard cycle (6.2)	Energy and capacity at different temperature and discharge rates (7.2)	Thermal shock cycling (8.2)	Overcharge protection (9.3)
Standard discharge (6.2.2.2)	Power and internal resistance (7.3)	Vibration (8.3)	Overdischarge protection (9.4)
Standard charge (6.2.2.3)	No load SOC loss (7.4)	Mechanical shock (8.4)	
	SOC loss at storage (7.5)		
	Cranking power at low temperature (7.6)		
	Cranking power at high temperature (7.7)		
	Energy efficiency (7.8)		
	Cycle life (7.9) <a href="https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011">ISO 12405-1:2011</a>		

<https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011>

**Figure 1 — Test plan — Overview**

5.4 Battery pack — Typical configuration

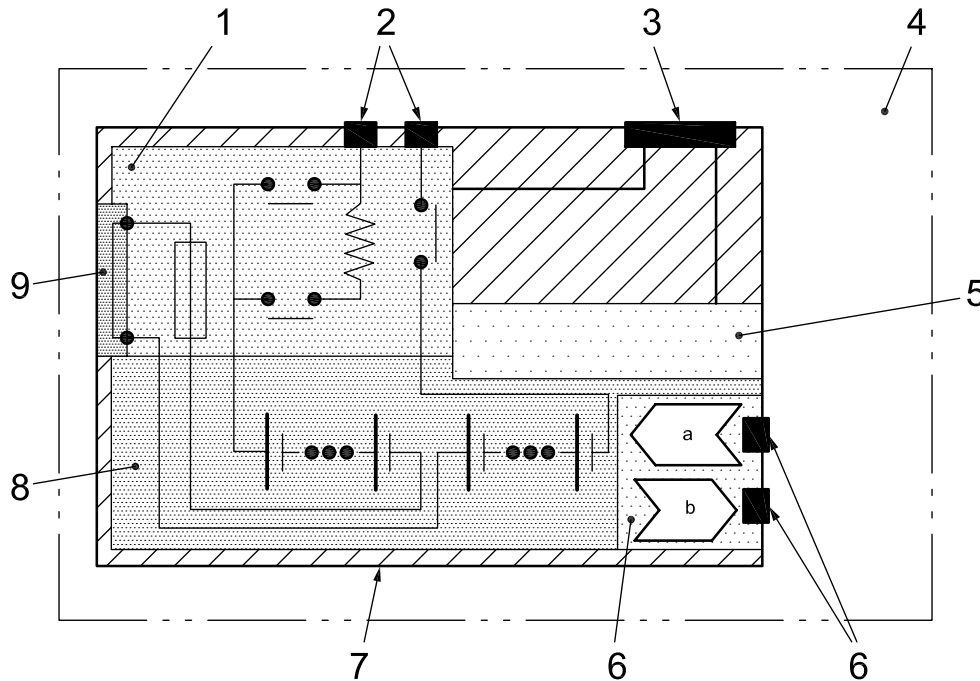

Key

- 1 voltage class B electric circuit (connectors, fuses, wiring)
- 2 voltage class B connections
- 3 voltage class A connections
- 4 battery pack
- 5 cell electronics
- 6 cooling device and connections (optional)
- 7 normal use impact-resistant case
- 8 cell assembly (cells, sensors, cooling equipment)
- 9 service disconnect

- a In.
- b Out.

iTech STANDARD PREVIEW  
(standards.itech.ai)

ISO 12405-1:2011

<https://standards.itech.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8b9608df61/iso-12405-1-2011>

Figure 2 — Typical configuration of battery pack


A battery pack represents an energy storage device, which includes cells or cell assemblies, cell electronics, voltage class B circuit and overcurrent shut-off device, including electrical interconnections, interfaces for cooling, voltage class B, auxiliary voltage class A and communication. The voltage class B circuit of the battery pack may include contactors and a manual shut-off function (service disconnect). All components are typically placed in a normal use impact-resistant case.

5.5 Battery system — Typical configuration

5.5.1 BCU

The BCU calculates SOC and state of health, and provides battery system operational limits to the vehicle management unit. The BCU may have direct access to the main contactors of the battery system in order to interrupt the voltage class B circuit under specified conditions, e.g. overcurrent, overvoltage, low voltage and high temperature. The BCU may vary in design and implementation; it may be a single electronic unit integrated into the battery system or it may be placed outside the battery pack and connected via a communication bus or input/output lines to the battery pack. The BCU functionalities may be integrated functions of one or more vehicle control units.

## 5.5.2 Battery system with integrated BCU

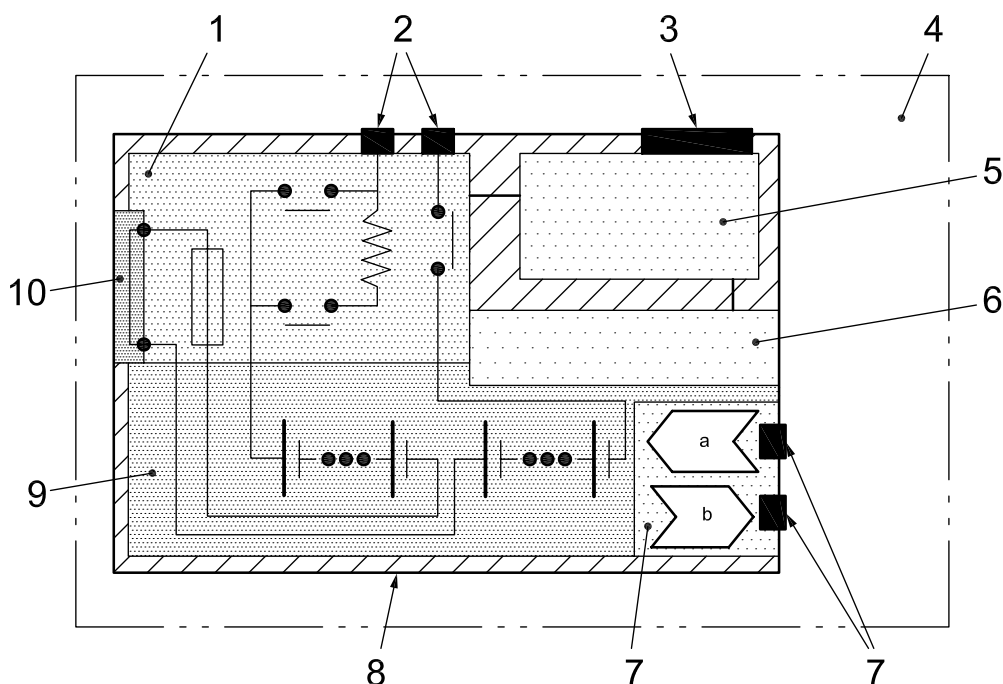

## Key

- 1 voltage class B electric circuit (connectors, fuses, wiring)  
 2 voltage class B connections  
 3 voltage class A connections  
 4 battery system  
 5 BCU  
 6 cell electronics <https://standards.iteh.ai/catalog/standards/sist/f621c25c-525c-49b0-bd91-8a8f9608df61/iso-12405-1-2011>  
 7 cooling device and connections (optional)  
 8 normal use impact-resistant case  
 9 cell assembly (cells, sensors, cooling equipment)  
 10 service disconnect
- a In.  
 b Out.

Figure 3 — Typical configuration of battery system with integrated BCU

A battery system represents an energy storage device, which includes cells or cell assemblies, cell electronics, a BCU, voltage class B circuit with contactors and overcurrent shut-off device, including electrical interconnections, interfaces for cooling, voltage class B, auxiliary voltage class A and communication. The voltage class B circuit may include a manual shut-off function (service disconnect). All components are typically placed in a normal use impact-resistant case. In this example, the BCU is integrated inside the normal use impact-resistant case and connected via its control functionalities to the battery pack.