



**SLOVENSKI STANDARD  
PSIST ETS 300 007:1996**

**01-oktober-1996**

---

**Digitalno omrežje z integriranimi storitvami (ISDN) - Podpora ISDN za terminalsko opremo paketnega načina**

Integrated Services Digital Network (ISDN); Support of packet-mode terminal equipment by an ISDN

**Ta slovenski standard je istoveten z: ETS 300 007 Edition 1**

---


**ICS:**

33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)
--------	---	--

**PSIST ETS 300 007:1996**

**en**



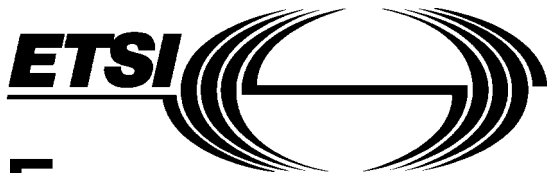

**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**ETS 300 007**

November 1991

---

Source: ETSI TC-SPS

Reference: T/S 46-50

ICS: 33.080

**Key words:** ISDN, packet-mode

## **Integrated Services Digital Network (ISDN); Support of packet-mode terminal equipment by an ISDN**

### **ETSI**

European Telecommunications Standards Institute

#### **ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

---

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1991. All rights reserved.





	7.2.2.1	B-Channel .....	27
	7.2.2.2	D-Channel .....	28
	7.2.2.3	Call offering.....	28
7.3		Virtual call establishment and release.....	32
	7.3.1	Link layer establishment and release.....	32
	7.3.2	Packet layer virtual call SETUP and RELEASE .....	33
7.4		Call clearing.....	33
	7.4.1	B-Channel.....	33
	7.4.2	D-Channel.....	34
	7.4.3	Additional error handling information.....	34
	7.4.4	Cause mappings.....	35
	7.4.4.1	Access to/from PSPDN services (Case A).....	35
	7.4.4.2	Access to/from the ISDN virtual circuit service (Case B) ....	35
7.5		Access collision.....	35
8		Terminal adaptor functionalities.....	39
8.1		General .....	39
8.2		Physical interfaces .....	40
8.3		Access through the B-channel .....	40
	8.3.1	General .....	40
	8.3.2	Rate adaption .....	40
	8.3.3	Signalling .....	41
	8.3.3.1	Outgoing call .....	41
	8.3.3.2	Incoming call .....	46
	8.3.3.3	Call clearing .....	46
	8.3.4	Synchronisation .....	48
8.4		Access through the D-Channel.....	48
	8.4.1	General .....	48
	8.4.2	LAPB-LAPD mapping.....	48
	8.4.2.1	Mapping by full link layer termination .....	48
	8.4.2.2	Mapping by minimum link layer termination.....	50
	8.4.3	Signalling .....	50
	8.4.3.1	Outgoing call .....	50
	8.4.3.2	Incoming call .....	51
	8.4.3.3	Data link disconnection.....	52
8.5		Access through the B- and D- channel.....	52
	8.5.1	General .....	52
	8.5.2	Outgoing call.....	53
	8.5.3	Incoming call.....	53
8.6		Test loops .....	53
	8.6.1	Test loops for TA with access through the B-channel.....	53
	8.6.1.1	Test loop reference configuration .....	53
	8.6.1.2	Test loop characteristics .....	54
	8.6.1.3	Loop activation/deactivation mechanism.....	54
	8.6.1.4	Coding of activation/deactivation control messages .....	54
Appendix..... I (informative): B-channel TA acting on layer 2 and 3 of CCITT Recommendation X.25			56
I.1		Introduction.....	56
I.2		Call control.....	56
	I.2.1	Idle phase.....	57
	I.2.1.1	Transferring to the establishment phase .....	57
	I.2.2	Establishment phase.....	58
	I.2.2.1	Outgoing call.....	58
	I.2.2.2	Incoming call.....	59
	I.2.2.3	Changing to the data transfer phase .....	60
	I.2.3	Data transfer phase.....	60
	I.2.3.1	Transferring to the clearing phase .....	60
	I.2.4	Clearing phase .....	61

I.2.4.1	Detection by the user.....	61
I.2.4.2	Detection by the network .....	62
Appendix II (informative): Interconnection of packet-mode TE2s which use the circuit-mode bearer service of the ISDN .....		
		63
Appendix III (informative): Example message flow diagrams and example conditions for cause mapping .		
		64
III.1	Example message flow diagrams .....	64
III.1.1	Key to the figures.....	64
III.1.2	Example message flow diagrams .....	66
III.2	Example conditions for cause mapping.....	73
Appendix IV (informative): D-channel TAs requiring full protocol termination in the TA.....		
		77
IV.1	Introduction.....	77
IV.2	Call control .....	77
IV.2.1	Idle phase .....	77
IV.2.1.1	Transferring to the establishment phase.....	78
IV.2.2	Establishment phase .....	79
IV.2.2.1	Outgoing call initiated via a call request packet or an I frame.....	79
IV.2.2.2	Incoming call.....	80
IV.2.3	Data transfer phase .....	80
IV.2.3.1	Transferring to the clearing phase.....	81
IV.2.4	Clearing phase.....	81
IV.2.4.1	Detection by the PH.....	82
Annex A (informative): States applicable to packet mode access connection (case B services) .....		
		83
A.1	Access connection states at the user side of the interface.....	83
A.1.1	Null state (U0).....	83
A.1.2	Call initiated (U1).....	83
A.1.3	Outgoing call proceeding (U3) .....	83
A.1.4	Call present (U6).....	83
A.1.5	Call received (U7) .....	83
A.1.6	Connect request (U8) .....	83
A.1.7	Incoming call proceeding (U9) .....	83
A.1.8	Active (U10).....	83
A.1.9	Disconnect request (U11) .....	84
A.1.10	Disconnect indication (U12) .....	84
A.1.11	Release request (U19) .....	84
A.2	Access connection states at the network side of the interface.....	84
A.2.1	Null state (N0).....	84
A.2.2	Call initiated (N1).....	84
A.2.3	Outgoing call proceeding (N3) .....	84
A.2.4	Call present (N6).....	84
A.2.5	Call received (N7) .....	84
A.2.6	Connect request (N8) .....	84
A.2.7	Incoming call proceeding (N9) .....	84
A.2.8	Active (N10).....	85
A.2.9	Disconnect request (N11) .....	85
A.2.10	Disconnect indication (N12) .....	85
A.2.11	Release request (N19) .....	85
A.2.12	Call Abort (N22).....	85
Annex B (normative): Messages for control of packet-mode access connections.....		
		86

B.1	Alerting.....	86
B.2	Call proceeding.....	87
B.3	Connect.....	88
B.4	Connect acknowledge.....	88
B.5	Disconnect.....	89
B.6	Progress.....	89
B.7	Release.....	90
B.8	Release complete.....	91
B.9	Setup.....	92
B.10	Status.....	94
B.11	Status enquiry.....	94
Annex C (normative):	Information elements for the control of packet-mode access connections.....	95
C.1	Protocol discriminator.....	95
C.2	Call reference.....	95
C.3	Message type.....	95
C.4	Other information elements.....	95
C.5	Redirecting number.....	97
Annex D (informative):	Example of ISDN CCITT Recommendation X.25 packet-mode bearer service access on the D-channel through a NT2 with frame handling functions.....	100
History.....		103