



SLOVENSKI STANDARD
SIST ETS 300 977 E1:2003

01-december-2003

8][JhUb]WW] b] hYY_ca i b] UWg]g]ghYa fUhU&žlE GdYh]Uj a Ygb]U
bUfc b]y_]]XYbh]UWg]a cXi `!a cV]bUcdfYa UfG=A!A 9Lf GA %%%&zfUh]]W
) "("%

Digital cellular telecommunications system (Phase 2+) (GSM); Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface (GSM 11.11 version 5.4.1)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 977 E1:2003](#)

<https://standards.iteh.ai/catalog/standards/sist/d3bf35b6-fa9b-4052-9e8a-760c7d0bacdf/sist-ets-300-977-e1-2003>

Ta slovenski standard je istoveten z: ETS 300 977 Edition 1

ICS:


33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--

SIST ETS 300 977 E1:2003

en

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST ETS 300 977 E1:2003
<https://standards.iteh.ai/catalog/standards/sist/d3bf35b6-fa9b-4052-9e8a-760c7d0bacdf/sist-ets-300-977-e1-2003>

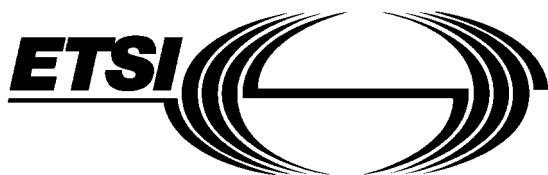

EUROPEAN TELECOMMUNICATION STANDARD

ETS 300 977

May 1997

Source: ETSI TC-SMG

Reference: DE/SMG-091111QR2

ICS: 33.020

Key words: Digital cellular telecommunications system, Global System for Mobile communications (GSM)



Digital cellular telecommunications system (Phase 2+); <https://standards.iteh.ai/catalog/standards/sist/d3bf35b6-fa9b-4052-9e8a-a00040fca83d?version=0.0.1> Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface (GSM 11.11 version 5.4.1)

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.

Page 2

ETS 300 977 (GSM 11.11 version 5.4.1): May 1997

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 977 E1:2003](#)

<https://standards.iteh.ai/catalog/standards/sist/d3bf35b6-fa9b-4052-9e8a-760c7d0bacdf/sist-ets-300-977-e1-2003>

Contents

Foreword	7
1 Scope.....	9
2 Normative references.....	9
3 Definitions, abbreviations and symbols	11
3.1 Definitions.....	11
3.2 Abbreviations	12
3.3 Symbols	13
4 Physical characteristics.....	14
4.1 Format and layout	14
4.1.1 ID-1 SIM.....	14
4.1.2 Plug-in SIM	14
4.2 Temperature range for card operation.....	14
4.3 Contacts.....	14
4.3.1 Provision of contacts.....	14
4.3.2 Activation and deactivation	15
4.3.3 Inactive contacts.....	15
4.3.4 Contact pressure.....	15
4.4 Precedence	15
4.5 Static Protection.....	15
ITEH STANDARD PREVIEW	
5 Electronic signals and transmission protocols.....	16
5.1 Supply voltage Vcc (contact C1).....	16
5.2 Reset (RST) (contact C2).....	17
5.3 Programming voltage Vpp (contact C6).....	17
5.4 Clock CLK (contact C3).....	17
5.5 I/O (contact C7)	18
5.6 States	18
5.7 Baudrate.....	18
5.8 Answer To Reset (ATR).....	19
5.8.1 Structure and contents	19
5.8.2 PTS procedure	21
5.8.3 Speed enhancement	21
5.9 Bit/character duration and sampling time	22
5.10 Error handling.....	22
6 Logical Model.....	22
6.1 General description	22
6.2 File identifier	23
6.3 Dedicated files	23
6.4 Elementary files.....	23
6.4.1 Transparent EF	23
6.4.2 Linear fixed EF	24
6.4.3 Cyclic EF	24
6.5 Methods for selecting a file	25
6.6 Reservation of file IDs.....	26
7 Security features	26
7.1 Authentication and cipher key generation procedure	26
7.2 Algorithms and processes	27
7.3 File access conditions.....	27
8 Description of the functions.....	28

8.1	SELECT	28
8.2	STATUS	29
8.3	READ BINARY	29
8.4	UPDATE BINARY	29
8.5	READ RECORD	29
8.6	UPDATE RECORD	30
8.7	SEEK	30
8.8	INCREASE	31
8.9	VERIFY CHV	31
8.10	CHANGE CHV	32
8.11	DISABLE CHV	32
8.12	ENABLE CHV	32
8.13	UNBLOCK CHV	33
8.14	INVALIDATE	33
8.15	REHABILITATE	33
8.16	RUN GSM ALGORITHM	34
8.17	SLEEP	34
8.18	TERMINAL PROFILE	34
8.19	ENVELOPE	34
8.20	FETCH	34
8.21	TERMINAL RESPONSE	34
9	Description of the commands	35
9.1	Mapping principles	35
9.2	Coding of the commands	37
9.2.1	SELECT	38
9.2.2	STATUS	41
9.2.3	READ BINARY	41
9.2.4	UPDATE BINARY	41
9.2.5	READ RECORD	41
9.2.6	UPDATE RECORD	42
9.2.7	SEEK	42
9.2.8	INCREASE	42
9.2.9	VERIFY CHV	43
9.2.10	CHANGE CHV	43
9.2.11	DISABLE CHV	43
9.2.12	ENABLE CHV	44
9.2.13	UNBLOCK CHV	44
9.2.14	INVALIDATE	44
9.2.15	REHABILITATE	44
9.2.16	RUN GSM ALGORITHM	44
9.2.17	SLEEP	45
9.2.18	GET RESPONSE	45
9.2.19	TERMINAL PROFILE	45
9.2.20	ENVELOPE	45
9.2.21	FETCH	46
9.2.22	TERMINAL RESPONSE	46
9.3	Definitions and coding	46
9.4	Status conditions returned by the card	47
9.4.1	Responses to commands which are correctly executed	48
9.4.2	Responses to commands which are postponed	48
9.4.3	Memory management	48
9.4.4	Referencing management	48
9.4.5	Security management	48
9.4.6	Application independent errors	49
9.4.7	Commands versus possible status responses	49
10	Contents of the Elementary Files (EF)	50
10.1	Contents of the EFs at the MF level	50
10.1.1	EF _{ICCID} (ICC Identification)	50

10.2	Contents of files at the GSM application level	51
	10.2.1 EF _{LP} (Language preference)	51
	10.2.2 EF _{IMSI} (IMSI).....	52
	10.2.3 EF _{Kc} (Ciphering key Kc).....	53
	10.2.4 EF _{PLMNsel} (PLMN selector)	53
	10.2.5 EF _{HPLMN} (HPLMN search period)	54
	10.2.6 EF _{ACMmax} (ACM maximum value)	54
	10.2.7 EF _{SST} (SIM service table)	55
	10.2.8 EF _{ACM} (Accumulated call metre).....	57
	10.2.9 EF _{GID1} (Group Identifier Level 1)	58
	10.2.10 EF _{GID2} (Group Identifier Level 2)	58
	10.2.11 EF _{SPN} (Service Provider Name).....	58
	10.2.12 EF _{PUCT} (Price per unit and currency table)	59
	10.2.13 EF _{CBMI} (Cell broadcast message identifier selection)	60
	10.2.14 EF _{BCCCH} (Broadcast control channels)	60
	10.2.15 EF _{ACC} (Access control class).....	61
	10.2.16 EF _{FPLMN} (Forbidden PLMNs)	61
	10.2.17 EF _{LOCI} (Location information)	62
	10.2.18 EF _{AD} (Administrative data).....	64
	10.2.19 EF _{Phase} (Phase identification)	64
	10.2.20 EF _{VGCS} (Voice Group Call Service)	65
	10.2.21 EF _{VGCSS} (Voice Group Call Service Status)	65
	10.2.22 EF _{VBS} (Voice Broadcast Service)	66
	10.2.23 EF _{VBSS} (Voice Broadcast Service Status)	67
	10.2.24 EF _{eMLPP} (enhanced Multi Level Pre-emption and Priority).....	67
	10.2.25 EF _{AAeM} (Automatic Answer for eMLPP Service)	68
	10.2.26 EF _{CBMID} (Cell Broadcast Message Identifier for Data Download)	69
	10.2.27 EF _{ECC} (Emergency Call Codes)	69
	10.2.28 EF _{CBMIR} (Cell broadcast message identifier range selection)	70
	10.2.29 EF _{DCK} De-personalization Control Keys	71
	10.2.30 EF _{CNL} (Co-operative Network List)	71
10.3	Contents of files at the telecom level	73
	10.3.1 EF _{ADN} (Abbreviated dialling numbers).....	73
	10.3.2 EF _{FDN} (Fixed dialling numbers)	76
	10.3.3 EF _{FDN} (Short messages).....	76
	10.3.4 EF _{CCP} (Capability configuration parameters)	77
	10.3.5 EF _{MSISDN} (MSISDN).....	78
	10.3.6 EF _{SMSP} (Short message service parameters).....	78
	10.3.7 EF _{SMSS} (SMS status).....	80
	10.3.8 EF _{LND} (Last number dialled).....	81
	10.3.9 EF _{SDN} (Service Dialling Numbers).....	81
	10.3.10 EF _{EXT1} (Extension1)	82
	10.3.11 EF _{EXT2} (Extension2)	83
	10.3.12 EF _{EXT3} (Extension3)	84
	10.3.13 EF _{BDN} (Barred Dialling Numbers).....	84
	10.3.14 EF _{EXT4} (Extension4)	85
10.4	Files of GSM (figure 8)	85
11	Application protocol	87
11.1	General procedures.....	88
	11.1.1 Reading an EF	88
	11.1.2 Updating an EF.....	88
	11.1.3 Increasing an EF	89
11.2	SIM management procedures.....	89
	11.2.1 SIM initialization.....	89
	11.2.2 GSM session termination	90
	11.2.3 Emergency Call Codes.....	91
	11.2.4 Language preference	91
	11.2.5 Administrative information request.....	91
	11.2.6 SIM service table request.....	91

11.2.7	SIM phase request	91
11.2.8	SIM Presence Detection and Proactive Polling	91
11.3	CHV related procedures.....	91
11.3.1	CHV verification	91
11.3.2	CHV value substitution.....	92
11.3.3	CHV disabling.....	92
11.3.4	CHV enabling.....	92
11.3.5	CHV unblocking	92
11.4	GSM security related procedures	93
11.4.1	GSM algorithms computation.....	93
11.4.2	IMSI request	93
11.4.3	Access control request.....	93
11.4.4	HPLMN search period request.....	93
11.4.5	Location information.....	93
11.4.6	Cipher key.....	93
11.4.7	BCCH information	93
11.4.8	Forbidden PLMN.....	93
11.5	Subscription related procedures.....	93
11.5.1	Dialling numbers	93
11.5.2	Short messages	96
11.5.3	Advice of Charge (AoC)	96
11.5.4	Capability configuration parameters.....	97
11.5.5	PLMN selector.....	97
11.5.6	Cell broadcast message identifier	97
11.5.7	Group identifier level 1	97
11.5.8	Group identifier level 2	97
11.5.9	Service Provider Name	97
11.5.10	Voice Group Call Services	97
11.5.11	Voice Broadcast Services	98
11.5.12	Enhanced Multi Level Pre-emption and Priority Service	98
11.5.13	Cell Broadcast Message range identifier.....	98
11.6	SIM Application Toolkit related procedures.....	98
11.6.1	Initialization procedure.....	98
11.6.2	Proactive polling	99
11.6.3	Support of commands	99
11.6.4	Support of response codes.....	99
11.6.5	Command-response pairs.....	99
11.6.6	Independence of normal GSM and SIM Application Toolkit tasks.....	99
11.6.7	Use of BUSY status response.....	99
11.6.8	Use of NULL procedure byte.....	99
11.6.9	Using the TERMINAL PROFILE, ENVELOPE, and TERMINAL RESPONSE commands	100
11.6.10	Using the FETCH command.....	100
11.6.11	Data Download via SMS-CB.....	100
11.6.12	Data Download via SMS-PP	100
11.6.13	Menu selection	100
11.6.14	Call Control	100
11.6.15	Proactive SIM.....	100
Annex A (normative):	Plug-in SIM	101
Annex B (informative):	FDN Procedures.....	102
Annex C (informative):	Suggested contents of the EFs at pre-personalization	107
Annex D (informative):	SIM application Toolkit protocol diagrams.	108
Annex E (informative):	Bibliography	115
History.....		116

Foreword

This European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) Technical Committee (TC) of the European Telecommunications Standards Institute (ETSI).

This ETS defines the interface between the Subscriber Identity Module (SIM) and the Mobile Equipment (ME) for use during the network operation phase of GSM as well as those aspects of the internal organization of the SIM which are related to the network operation phase, within the digital cellular telecommunications system (Phase 2/Phase 2+).

This ETS is a GSM technical specification version 5. The ETS from which this Phase 2+ ETS has evolved is Phase 2 GSM ETS 300 608 Edition 5 (GSM 11.11 version 4.18.1).

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI/PNE Rules.

Transposition dates	
Date of adoption:	2 May 1997
Date of latest announcement of this ETS (doa):	31 August 1997
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	28 February 1998
Date of withdrawal of any conflicting National Standard (dow):	28 February 1998

**iTeH STANDARD PREVIEW
(standards.iteh.ai)**

SIST ETS 300 977 E1:2003
<https://standards.iteh.ai/catalog/standards/sist/d3bf35b6-fa9b-4052-9e8a-760c7d0bacdf/sist-ets-300-977-e1-2003>

Page 8
ETS 300 977 (GSM 11.11 version 5.4.1): May 1997

Blank page

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST ETS 300 977 E1:2003
<https://standards.iteh.ai/catalog/standards/sist/d3bf35b6-fa9b-4052-9e8a-760c7d0bacdf/sist-ets-300-977-e1-2003>

1 Scope

This European Telecommunication Standard (ETS) defines the interface between the Subscriber Identity Module (SIM) and the Mobile Equipment (ME) for use during the network operation phase of GSM as well as those aspects of the internal organization of the SIM which are related to the network operation phase. This is to ensure interoperability between a SIM and an ME independently of the respective manufacturers and operators. The concept of a split of the Mobile Station (MS) into these elements as well as the distinction between the GSM network operation phase, which is also called GSM operations, and the administrative management phase are described in the GSM 02.17 [6].

This ETS defines:

- the requirements for the physical characteristics of the SIM, the electrical signals and the transmission protocols;
- the model which shall be used as a basis for the design of the logical structure of the SIM;
- the security features;
- the interface functions;
- the commands;
- the contents of the files required for the GSM application;
- the application protocol.

iTeh STANDARD PREVIEW

Unless otherwise stated, references to GSM also apply to DCS 1 800.

(standards.iteh.ai)

This ETS does not specify any aspects related to the administrative management phase. Any internal technical reallocation of either the SIM or the ME are only specified where these reflect over the interface.

This ETS does not specify any of the security algorithms which may be used.

<https://standards.iteh.ai/catalog/standards/sist/36b135b6-1a9b-4052-9e8a-760c7d0bacdf/sist-ets-300-977-e1-2003>

This ETS defines the SIM/ME interface for GSM Phase 2. While all attempts have been made to maintain phase compatibility, any issues that specifically relate to Phase 1 should be referenced from within the relevant Phase 1 specification.

2 Normative references

This European Telecommunication Standard (ETS) incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of, any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] GSM 01.02: "Digital cellular telecommunications system (Phase 2+); General description of a GSM Public Land Mobile Network (PLMN)".
- [2] GSM 01.04 (ETR 350): "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [3] GSM 02.07 (ETS 300 906): "Digital cellular telecommunications system (Phase 2+); Mobile Stations (MS) features".
- [4] GSM 02.09 (ETS 300 920): "Digital cellular telecommunications system; Security aspects".
- [5] GSM 02.11 (ETS 300 921): "Digital cellular telecommunications system; Service accessibility".

Page 10

ETS 300 977 (GSM 11.11 version 5.4.1): May 1997

- [6] GSM 02.17 (ETS 300 922): "Digital cellular telecommunications system; Subscriber Identity Modules (SIM) Functional characteristics".
- [7] GSM 02.24 (ETS 300 923): "Digital cellular telecommunications system; Description of Charge Advice Information (CAI)".
- [8] GSM 02.30 (ETS 300 907): "Digital cellular telecommunications system (Phase 2+); Man-Machine Interface (MMI) of the Mobile Station (MS)".
- [9] GSM 02.86: "Digital cellular telecommunications system; Advice of charge (AoC) Supplementary Services - Stage 1".
- [10] GSM 03.03 (ETS 300 927): "Digital cellular telecommunications system (Phase 2+); Numbering, addressing and identification".
- [11] GSM 03.20 (ETS 300 929): "Digital cellular telecommunications system (Phase 2+); Security related network functions".
- [12] GSM 03.38 (ETS 300 900): "Digital cellular telecommunications system (Phase 2+); Alphabets and language-specific information".
- [13] GSM 03.40 (ETS 300 901): "Digital cellular telecommunications system (Phase 2+); Technical realization of the Short Message Service (SMS) Point-to-Point (PP)".
- [14] GSM 03.41 (ETS 300 902): "Digital cellular telecommunications system (Phase 2+); Technical realization of Short Message Service Cell Broadcast (SMSCB)".
*New STANDARD PREVIEW
(standards.iteh.ai)*
- [15] GSM 04.08 (ETS 300 940): "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 specification".
- [16] GSM 04.11 (ETS 300 942): "Digital cellular telecommunications system (Phase 2+); Point-to-Point (PP) Short Message Service (SMS) support on mobile radio interface".
- [17] GSM 09.91: "Digital cellular telecommunications system; Interworking aspects of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface between Phase 1 and Phase 2".
- [18] CCITT Recommendation E.118: "The international telecommunication charge card".
- [19] CCITT Recommendation E.164: "Numbering plan for the ISDN era".
- [20] CCITT Recommendation T.50: "International Alphabet No. 5 (ISO 646: 1983, Information processing - ISO 7-bits coded characters set for information interchange)".
- [21] ISO/IEC 7 810 (1995): "Identification cards - Physical characteristics".
- [22] ISO/IEC 7 811-1 (1995): "Identification cards - Recording technique - Part 1: Embossing".
- [23] ISO/IEC 7 811-3 (1995): "Identification cards - Recording technique - Part 3: Location of embossed characters on ID-1 cards".
- [24] ISO 7 816-1 (1987): "Identification cards - Integrated circuit(s) cards with contacts, Part 1: Physical characteristics".

- [25] ISO 7 816-2 (1988): "Identification cards - Integrated circuit(s) cards with contacts, Part 2: Dimensions and locations of the contacts".
- [26] ISO/IEC 7 816-3 (1989): "Identification cards - Integrated circuit(s) cards with contacts, Part 3: Electronic signals and transmission protocols".
- [27] GSM 11.14: "Digital cellular telecommunications system (Phase 2+); Specification of the SIM Application Toolkit for the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [28] GSM 11.12 (ETS 300 641): "Digital cellular telecommunications system (Phase 2); Specification of the 3 Volt Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [29] GSM 02.22: "Digital cellular telecommunications system (Phase 2+); Personalization of GSM Mobile Equipment (ME) Mobile functionality specification".

3 Definitions, abbreviations and symbols

3.1 Definitions

For the purposes of this ETS, the following definitions apply, in addition to those listed in GSM 01.02 [1]:

access conditions: A set of security attributes associated with a file.

application: An application consists of a set of security mechanisms, files, data and protocols (excluding transmission protocols).

(standards.iteh.ai)

application protocol: The set of procedures required by the application.

card session: A link between the card and the external world starting with the ATR and ending with a subsequent reset or a deactivation of the card.

current directory: The latest MF or DF selected.

current EF: The latest EF selected.

data field: Obsolete term for Elementary File.

Dedicated File (DF): A file containing access conditions and, optionally, Elementary Files (EFs) or other Dedicated Files (DFs).

directory: General term for MF and DF.

Elementary File (EF): A file containing access conditions and data and no other files.

file: A directory or an organized set of bytes or records in the SIM.

file identifier: The 2 bytes which address a file in the SIM.

GSM or DCS 1 800 application: Set of security mechanisms, files, data and protocols required by GSM or DCS 1 800.

GSM session: That part of the card session dedicated to the GSM operation.

IC card SIM: Obsolete term for ID-1 SIM.

ID-1 SIM: The SIM having the format of an ID-1 card (see ISO 7 816-1 [24]).

Page 12**ETS 300 977 (GSM 11.11 version 5.4.1): May 1997**

Master File (MF): The unique mandatory file containing access conditions and optionally DFs and/or EFs.

normal GSM operation: Relating to general, CHV related, GSM security related and subscription related procedures.

padding: One or more bits appended to a message in order to cause the message to contain the required number of bits or bytes.

plug-in SIM: A Second format of SIM (specified in clause 4).

proactive SIM: A SIM which is capable of issuing commands to the ME. Part of SIM Application Toolkit (see clause 11).

record: A string of bytes within an EF handled as a single entity (see clause 6).

record number: The number which identifies a record within an EF.

record pointer: The pointer which addresses one record in an EF.

root directory: Obsolete term for Master File.

SIM application toolkit procedures: Defined in GSM 11.14 [27].

3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply, in addition to those listed in GSM 01.04 [2]:

iTeh STANDARD PREVIEW (standards.itech.ai)	
A3	Algorithm 3, authentication algorithm; used for authenticating the subscriber
A5	Algorithm 5, cipher algorithm; used for enciphering/deciphering data
A8	Algorithm 8, cipher key generator; used to generate K_c
A38	A single algorithm performing the functions of A3 and A8 <small>http://standards.itechcatalog.standards.sisets-300-977-e1-2003-4032-9e8a-4003-0000-acdf/sist-ets-300-977-e1-2003</small>
ACM	Accumulated Call Metre
ADN	Abbreviated Dialling Number
ADM	Access condition to an EF which is under the control of the authority which creates this file
ALW	ALWays
AoC	Advice of Charge
APDU	Application Protocol Data Unit
ATR	Answer To Reset
BCCH	Broadcast Control CHannel
BCD	Binary Coded Decimal
BDN	Barred Dialling Number
BTS	Base Transmitter Station
CB	Cell Broadcast
CBMI	Cell Broadcast Message Identifier
CCITT	The International Telegraph and Telephone Consultative Committee (now also known as the ITU Telecommunications Standardization sector)
CCP	Capability/Configuration Parameter
CHV	Card Holder Verification information; access condition used by the SIM for the verification of the identity of the user
CLA	CLAss
CNL	Co-operative Network List
DCK	De-personalization Control Keys
DCS	Digital Cellular System
DF	Dedicated File (abbreviation formerly used for Data Field)
DTMF	Dual Tone Multiple Frequency
ECC	Emergency Call Code
EF	Elementary File
ETSI	European Telecommunications Standards Institute

eMLPP	enhanced Multi-Level Precedence and Pre-emption Service
etu	elementary time unit
FDN	Fixed Dialling Number
GSM	Global System for Mobile communications
HPLMN	Home PLMN
IC	Integrated Circuit
ICC	Integrated Circuit(s) Card
ID	IDentifier
IEC	International Electrotechnical Commission
IMSI	International Mobile Subscriber Identity
ISO	International Organization for Standardization
Kc	Cryptographic key; used by the cipher A5
Ki	Subscriber authentication key; the cryptographic key used by the authentication algorithm, A3, and cipher key generator, A8
LAI	Location Area Information; information indicating a cell or a set of cells
lghth	The (specific) length of a data unit
LND	Last Number Dialled
LSB	Least Significant Bit
MCC	Mobile Country Code
ME	Mobile Equipment
MF	Master File
MMI	Man Machine Interface
MNC	Mobile Network Code
MS	Mobile Station
MSISDN	Mobile Station international ISDN number
MSB	Most Significant Bit
NET	NETwork
NEV	NEVer
NPI	Numbering Plan Identifier
PIN/PIN2	Personal Identification Number / Personal Identification Number 2 (obsolete terms for CHV1 and CHV2, respectively)
PLMN	Public Land Mobile Network
PTS	Protocol Type Select (response to the ATR)
PUK/PUK2	PIN Unblocking Key / PIN2 Unblocking Key (obsolete terms for UNBLOCK CHV1 and UNBLOCK CHV2, respectively)
RAND	A RANDom challenge issued by the network
RFU	Reserved for Future Use
SDN	Service Dialling Number
SIM	Subscriber Identity Module
SMS	Short Message Service
SRES	Signed REsponse calculated by a SIM
SSC	Supplementary Service Control string
SW1/SW2	Status Word 1 / Status Word 2
TMSI	Temporary Mobile Subscriber Identity
TON	Type Of Number
TP	Transfer layer Protocol
TPDU	Transfer Protocol Data Unit
TS	Technical Specification
UNBLOCK CHV1/2	value to unblock CHV1/CHV2
VBS	Voice Broadcast Service
VGCS	Voice Group Call Service
VPLMN	Visited PLMN

iTech STANDARD PREVIEW

(standard.its.itech.ai)

SIST ETS 300 977 E1:2003
<https://standards.its.itech.ai/ets300977e1/121-05b6-f9-4052-9e8a-760c70baec/>

3.3 Symbols

Vcc	Supply voltage
Vpp	Programming voltage
"0" to "9" and "A" to "F"	The sixteen hexadecimal digits