
**Information technology — Data
interchange on 120 mm and 80 mm
optical disk using +RW HS format —
Capacity: 4,7 Gbytes and 1,46 Gbytes per
side (recording speed 8X)**

*Technologies de l'information — Échange de données sur disques
optiques de 120 mm et 80 mm en utilisant le format +RW HS —
Capacité: 4,7 Go et 1,46 Go par face (vitesse d'enregistrement de 8X)*

iTeh STANDARDS.PDF.VIEW
(standards.iteh.ai)

[ISO/IEC 26925:2009](https://standards.iteh.ai/catalog/standards/sist/d62d63cd-5fee-4129-b3b2-431240efe084/iso-iec-26925-2009)

<https://standards.iteh.ai/catalog/standards/sist/d62d63cd-5fee-4129-b3b2-431240efe084/iso-iec-26925-2009>

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 26925:2009](https://standards.iteh.ai/catalog/standards/sist/d62d63cd-5fee-4129-b3b2-431240efe084/iso-iec-26925-2009)

<https://standards.iteh.ai/catalog/standards/sist/d62d63cd-5fee-4129-b3b2-431240efe084/iso-iec-26925-2009>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	vii
Introduction.....	viii
1 Scope	1
2 Conformance.....	1
2.1 Optical disk.....	1
2.2 Generating system.....	1
2.3 Receiving system.....	2
2.4 Compatibility statement	2
3 Normative references	2
4 Terms and definitions	2
5 Conventions and notations	4
5.1 Representation of numbers	4
5.2 Names	4
6 Abbreviated terms	5
7 General description of the optical disk	6
8 General Requirements	7
8.1 Environments	7
8.1.1 Test environment.....	7
8.1.2 Operating environment	7
8.1.3 Storage environment	7
8.1.4 Transportation.....	7
8.2 Safety requirements	8
8.3 Flammability	8
9 Reference Drive.....	8
9.1 Optical system	8
9.2 Optical beam	9
9.3 Read channel 1.....	9
9.4 Disk clamping.....	9
9.5 Rotation of the disk	10
9.6 Wobble channel (Read channel 2)	10
9.7 Tracking channel (Read channel 2)	11
9.8 Reference servo systems	11
9.8.1 Normalized servo transfer function	11
9.8.2 Reference Servo for Axial Tracking	11
9.8.3 Reference Servo for Radial Tracking.....	12
10 Dimensional characteristics	14
10.1 Reference Planes	14
10.2 Overall dimensions.....	15
10.3 First transition area	15
10.4 Second transition area	16
10.5 Clamping Zone	16
10.6 Third transition area	16
10.7 Information Zone.....	16
10.8 Rim area	17
10.9 Remark on tolerances	17
11 Mechanical characteristics	17

11.1	Mass	17
11.2	Moment of inertia	17
11.3	Dynamic imbalance.....	17
11.4	Axial runout	17
11.4.1	Tracking requirements at the Reference velocity (CLV)	17
11.4.2	Tracking requirements at 3 000 RPM (CAV)	18
11.5	Radial runout	18
11.5.1	Tracking requirements at the Reference velocity (CLV)	18
11.5.2	Tracking requirements at 3 000 RPM (CAV)	18
12	Optical characteristics in the Information Zone	19
12.1	Index of refraction	19
12.2	Thickness of the substrate.....	19
12.3	Reflectivity	19
12.4	Birefringence	19
12.5	Angular deviation	19
13	Data format	20
13.1	Data Frames.....	20
13.1.1	Identification Data (ID)	21
13.1.2	ID Error Detection Code (IED)	22
13.1.3	RSV	22
13.1.4	Error Detection Code (EDC)	22
13.2	Scrambled Frames	23
13.3	ECC Blocks	23
13.4	Recording Frames.....	25
13.5	Modulation and NRZI conversion	25
13.6	Physical Sectors	26
13.7	Layout of a Recording UNIT (RUN).....	27
13.7.1	Recording Unit position	28
13.8	d.c. component suppression control.....	28
14	Track format.....	29
14.1	Track shape	29
14.2	Track path	30
14.3	Track pitch	30
14.4	Track layout	30
14.4.1	ADIP information.....	30
14.4.2	Physical format information in ADIP	33
15	General description of the Information Zone	49
16	Layout of the Information Zone	50
16.1	Physical Sector Numbers (PSNs).....	50
17	Lead-in Zone	51
17.1	Initial Zone	51
17.2	Inner Disk Test Zone	51
17.3	Inner Drive Test Zone	51
17.4	Guard Zone 1	51
17.5	Reserved Zone 1	51
17.6	Reserved Zone 2	52
17.7	Inner Disk Identification Zone.....	52
17.8	Reserved Zone 3	52
17.9	Reference Code Zone	53
17.10	Buffer Zone 1	53
17.11	Control Data Zone	53
17.11.1	Physical format information.....	53
17.11.2	Disk manufacturing information.....	55
17.11.3	Content provider information	55
17.12	Buffer Zone 2	55
18	Data Zone	55

ITC'S STANDARD PREVIEW
(standards.itc.ai)

<https://standards.itc.ai/catalog/standards/sist/d62d63cd-5fcc-4129-b3b2-431240cfc084/iso-iec-26925-2009>

19	Lead-out Zone	55
19.1	Buffer Zone 3	56
19.2	Outer Disk Identification Zone	56
19.3	Guard Zone 2	56
19.4	Reserved Zone 4	56
19.5	Outer Drive Test Zone	56
19.6	Outer Disk Test Zone	57
19.7	Guard Zone 3	57
20	Assignment of Logical Sector Numbers (LSNs)	57
21	Formatting	57
21.1	Pre-formatting	58
21.1.1	Verification	58
21.2	Background formatting	58
21.2.1	Initialization	58
21.2.2	De-icing	58
21.2.3	Finalization	59
21.2.4	Verification (optional)	59
21.3	Sequential recording without formatting	59
22	Disk Control Blocks	60
22.1	General format of Disk Control Blocks	60
22.2	Format of the Formatting DCB (FDCB)	62
22.3	Format of the Write inhibit DCB (WDCB)	66
23	General	68
24	Method of testing	68
24.1	Environment	68
24.2	Reference Drive	68
24.2.1	Optics and mechanics	68
24.2.2	Read power	68
24.2.3	Read channels	69
24.2.4	Tracking	69
24.3	Definition of signals	69
25	Characteristics of the groove signals	70
25.1	Phase depth	70
25.2	Push-pull signal	70
25.3	Track Cross signal	70
25.4	Normalized wobble signal	70
25.5	Characteristics of the wobble	71
26	Method of testing	71
26.1	Environment	71
26.2	Reference Drive	71
26.2.1	Optics and mechanics	71
26.2.2	Read power	71
26.2.3	Read channels	71
26.2.4	Tracking	72
26.2.5	Scanning velocity	72
26.3	Write conditions	72
26.3.1	Write pulse waveform	72
26.3.2	Write power	72
26.4	Measurement conditions	73
27	Characteristics of the recorded signals	73
27.1	Channel bit length	73
27.2	Definition of signals	73
27.2.1	High frequency signals (HF)	73
27.2.2	Modulated amplitude	74
27.2.3	Reflectance×Modulation product	74
27.2.4	Signal asymmetry	74

27.2.5	Normalized Slicing Level jump	75
27.2.6	Jitter	75
27.2.7	Track Cross signal	75
27.3	Read stability	75
28	Additional testing conditions	76
28.1	Test environment	76
28.1.1	Optics	76
28.2	Definition of signals	76
28.2.1	Modulated amplitude	76
28.2.2	Signal asymmetry	77
28.2.3	Jitter	77
28.2.4	Track Cross signal	77
28.2.5	Differential phase tracking error signal	77
28.2.6	Tangential push-pull signal	78
29	Quality of the recording layer	79
29.1	Defects	79
29.20.1	Data errors	79
30	Method of testing	79
30.1	Environment	79
30.2	Reference Drive	80
30.2.1	Optics and mechanics	80
30.2.2	Read power	80
30.2.3	Read channels	80
30.2.4	Error correction	80
30.2.5	Tracking	80
31	Minimum quality of a Recording Unit	80
31.1	Tracking	80
31.2	User-written data	81
Annex A (normative)	80 mm disk	82
Annex B (normative)	Structure for Extended format information in the Data Zone	85
Annex C (normative)	Measurement of light reflectivity	88
Annex D (normative)	Measurement of birefringence	90
Annex E (normative)	Measuring conditions for operation signals	93
Annex F (normative)	Measurement of the differential phase tracking error	96
Annex G (normative)	The write pulse wave form for testing	100
Annex H (normative)	8-to-16 Modulation	103
Annex I (normative)	Optimum Power Control	112
Annex J (normative)	Logical to Physical address translation	117
Annex K (informative)	Explanation about the usage of the reference servos	118
Annex L (informative)	Measurement of the groove wobble amplitude	123
Annex M (informative)	Transportation	125
Annex N (informative)	Defect Management and Physical Formatting	126
Annex O (informative)	Video Content Protection System	127
Annex P (informative)	How to use the Physical format information in ADIP	128
Annex Q (informative)	Values to be Implemented in Existing and Future Specifications	130
Bibliography	133

ITeh STANDARD PREVIEW

(standards.itech.ai)

ISO/IEC 26925:2009

<https://standards.itech.ai/catalog/standards/sist/d62d63ed-56ce-4129-b3b2-131240ef0814/iso-iec-26925-2009>

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 26925 was prepared by Ecma International (as ECMA-371) and was adopted, under a special “fast-track procedure”, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

This second edition cancels and replaces the first edition (ISO/IEC 26925:2006), which has been technically revised.

[ISO/IEC 26925:2009](https://standards.iteh.ai/catalog/standards/sist/d62d63cd-5fee-4129-b3b2-431240efe084/iso-iec-26925-2009)

<https://standards.iteh.ai/catalog/standards/sist/d62d63cd-5fee-4129-b3b2-431240efe084/iso-iec-26925-2009>

Introduction

Ecma Technical Committee TC31 was established in 1984 for the standardization of optical disks and optical disk cartridges (ODC). Since its establishment, the Committee has made major contributions to ISO/IEC toward the development of International Standards for 80 mm, 90 mm, 120 mm, 300 mm, and 356 mm media. Numerous standards have been developed by TC31 and published by Ecma, almost all of which have also been adopted by ISO/IEC under the fast-track procedure as International Standards.

In February 2002, a group of companies proposed that TC31 develop a standard for 120 mm rewritable optical disks using phase change recording technology and based on ISO/IEC 16448 and ISO/IEC 16969. TC31 adopted this project and started the work that resulted in ISO/IEC 17341.

In February 2005, a proposal was made to TC31 to develop a new Ecma Standard that supports high-speed recording of 120 mm and 80 mm rewritable disks based on the same technology as ISO/IEC 17341.

This International Standard specifies two Types of rewritable optical disks: one (Type S) making use of recording on only a single side of the disk and yielding a nominal capacity of 4,7 Gbytes or 1,46 Gbytes per disk and the other (Type D) making use of recording on both sides of the disk and yielding a nominal capacity of 9,4 Gbytes or 2,92 Gbytes per disk.

This International Standard, taken together with a standard for volume and file structure, such as for instance developed in Ecma Technical Committee TC15, provides the requirements for information interchange between systems.

TC15 STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/d62d63cd-5fee-4129-b3b2-431240efe084/iso-iec-26925-2009>

Information technology — Data interchange on 120 mm and 80 mm optical disk using +RW HS format — Capacity: 4,7 Gbytes and 1,46 Gbytes per side (recording speed 8X)

1 Scope

This International Standard specifies the mechanical, physical and optical characteristics of 120 mm rewritable optical disks with capacities of 4,7 Gbytes and 9,4 Gbytes. It specifies the quality of the recorded and unrecorded signals, the format of the data and the recording method, thereby allowing for information interchange by means of such disks. The data can be written, read and overwritten many times using the phase change method. These disks are identified as +RW HS (High Speed).

This International Standard also specifies 80 mm disks with capacities of 1,46 Gbytes and 2,92 Gbytes. These disks have the same characteristics as the 120 mm disks, except for some parameters related to the smaller dimensions. All parameters unique for the 80 mm disks are specified in Annex A.

This International Standard specifies the following:

- two related but different Types of this disk (see Clause 7);
- the conditions for conformance; [ISO/IEC 26925:2009](https://standards.iteh.ai/catalog/standards/sist/d62d63cd-5fee-4129-b3b2-11d1-437200000000/iso-iec-26925-2009)
- the environments in which the disk is to be tested, operated and stored; <https://standards.iteh.ai/catalog/standards/sist/d62d63cd-5fee-4129-b3b2-11d1-437200000000/iso-iec-26925-2009>
- the mechanical, physical and dimensional characteristics of the disk, so as to provide mechanical interchange between data processing systems;
- the format of the information on the disk, including the physical disposition of the tracks and sectors, the error correcting codes and the coding method;
- the characteristics of the signals recorded on the disk, thus enabling data processing systems to read the data from the disk.

This International Standard provides for the interchange of disks between optical disk drives. Together with a standard for volume and file structure, it provides for full data interchange between data processing systems.

2 Conformance

2.1 Optical disk

A claim of conformance with this International Standard shall specify the Type implemented. An optical disk is in conformance with this International Standard if it meets all mandatory requirements specified for its Type.

2.2 Generating system

A generating system is in conformance with this International Standard if the optical disk it generates is in accordance with 2.1.

2.3 Receiving system

A receiving system is in conformance with this International Standard if it is able to handle both Types of optical disk according to 2.1.

2.4 Compatibility statement

A claim of conformance by a generating or receiving system with this International Standard shall include a statement listing any other standards supported. This statement shall specify the numbers of the standards, the optical disk types supported (where appropriate) and whether support includes reading only or both reading and writing.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 4873:1991, *Information technology — ISO 8-bit code for information interchange — Structure and rules for implementation*

ISO/IEC 16448:2002, *Information technology — 120 mm DVD — Read-only disk*

ECMA-287, *Safety of electronic equipment* (2002)

IT-**STANDARD PREVIEW**
(standards.iteh.ai)

4 Terms and definitions

For the purposes of this document, the following terms and definitions apply.
<https://standards.iteh.ai/catalog/standards/sis/431240efe084/iso-iec-26925-2009>

4.1

channel bit

elements by which the binary values ZERO and ONE are represented by marks and spaces on the disk

4.2

clamping zone

annular part of the disk within which the clamping force is applied by the clamping device

4.3

Digital Sum Value

DSV

arithmetic sum obtained from a bit stream by allocating the decimal value +1 to bits set to ONE and the decimal value -1 to bits set to ZERO

4.4

disk reference plane

plane defined by the perfectly flat annular surface of an ideal spindle onto which the clamping zone of the disk is clamped, and which is normal to the axis of rotation

4.5

dummy substrate

layer, which can be transparent or not, provided for the mechanical support of the disk and, in some cases, of the recording layer as well

4.6

entrance surface

surface of the disk onto which the optical beam first impinges

4.7**field**

subdivision of a sector

4.8**groove**

trench-like feature of the disk, applied before the recording of any information and used to define the track location

NOTE The groove is located nearer to the entrance surface than the “land” between the grooves. The recording is made on the groove.

4.9**interleaving**

process of reallocating the physical sequence of units of data so as to render the data more immune to burst errors

4.10**mark**

feature of the recording layer that can take the form of an amorphous domain, a pit or any other type or form that can be sensed by the optical system

NOTE The pattern of marks and spaces represents the data on the disk.

4.11**phase change**

physical effect by which the area of a recording layer irradiated by a laser beam is heated so as to change from an amorphous state to a crystalline state and vice versa

4.12**physical sector**

smallest addressable part of a track in the Information Zone of a disk that can be accessed independently of other addressable parts of the zone

4.13**recording layer**

layer of the disk on which data is written during manufacture and/or use

4.14**Reed–Solomon code****RS**

error detection and/or correction code

4.15**reference velocity**

linear velocity that results in the nominal channel bit rate of 26,156 25 Mbit/s

4.16**space**

feature of the recording layer that can take the form of a crystal, a non-pit or any other type or form that can be sensed by the optical system

NOTE The pattern of marks and spaces represents the data on the disk.

4.17**substrate**

transparent layer of the disk, provided for mechanical support of the recording layer, through which the optical beam accesses the recording layer

4.18
track

360° turn of a continuous spiral

4.19
track pitch

distance between adjacent track centrelines, measured in a radial direction

4.20
Video Content Protection System
VCPS

method to prevent unauthorized copying and/or redistribution of video data that is recorded in the DVD+R/+RW video format

4.21
wobble

continuous sinusoidal deviation of the track from the average centreline

NOTE Location information is included as phase modulated data in the wobble.

4.22
zone

annular area of the disk

5 Conventions and notations

STANDARD PREVIEW
(standards.iteh.ai)

5.1 Representation of numbers

A measured value is rounded off to the least significant digit of the corresponding specified value. For instance, it implies that a specified value of 1,26 with a positive tolerance of +0,01 and a negative tolerance of -0,02 allows a range of measured values from 1,235 to 1,274.

Numbers in decimal notations are represented by the digits 0 to 9.

Numbers in hexadecimal notation are represented by the hexadecimal digits 0 to 9 and A to F in parentheses.

The setting of bits is denoted by ZERO and ONE.

Numbers in binary notations and bit patterns are represented by strings of digits 0 and 1, with the most significant bit shown to the left. In a pattern of n bits, bit $b_{(n-1)}$ shall be the most significant bit (msb) and bit b_0 shall be the least significant bit (lsb). Bit $b_{(n-1)}$ shall be recorded first.

Negative values of numbers in binary notation are given as Two's complement.

In each data field, the data is recorded so that the most significant byte (MSB), identified as Byte 0, shall be recorded first and the least significant byte (LSB) last.

In a field of $8n$ bits, bit $b_{(8n-1)}$ shall be the most significant bit (msb) and bit b_0 the least significant bit (lsb). Bit $b_{(8n-1)}$ shall be recorded first.

5.2 Names

The names of entities, e.g. specific tracks, fields, etc., are given with an initial capital.

6 Abbreviated terms

a.c.	alternating current
ADIP	address in pre-groove
ASM	asymmetry
BP	Byte Position
BPF	Band Pass Filter
CAV	Constant Angular Velocity
CLD	Constant Linear Density
CLV	Constant Linear Velocity
d.c.	direct current
DCB	Disk Control Block
DCC	d.c. Component suppression Control
DOW	Direct OverWrite
DSV	Digital Sum Value
ECC	Error Correction Code
EDC	Error Detection Code
EI	Extended Information
FDCB	Formatting DCB
HF	High Frequency
ID	Identification Data
IED	ID Error Detection code
LPF	Low Pass Filter
LSB	Least Significant Byte
lsb	least significant bit
LSN	Logical Sector Number
MSB	Most Significant Byte
msb	most significant bit
NA	Numerical Aperture
NRZ	Non Return to Zero
NRZI	Non Return to Zero Inverted
NSL	Normalized Slicing Level
OPC	Optimum Power Control
OTP	Opposite Track Path
PAA	Physical Address in ADIP
PBS	Polarizing Beam Splitter
PI	Parity of Inner-code
PLL	Phase Locked Loop
PO	Parity of Outer-code
PP	Push-Pull
pp	peak-to-peak
PSN	Physical Sector Number
PTP	Parallel Track Path
RIN	Relative Intensity Noise
RPM	Revolutions Per Minute
RS	Reed–Solomon code
RSV	reserved (in use by specific applications)
RUN	Recording UNit
SNR	Signal to Noise Ratio
SPS	Start Position Shift
SYNC	synchronization code

7 General description of the optical disk

The optical disk that is the subject of this International Standard consists of two substrates bonded together by an adhesive layer, so that the recording layer(s) is (are) on the inside. The centring of the disk is performed on the edge of the centre hole of the assembled disk on the side currently accessed. Clamping is performed in the Clamping Zone. This International Standard provides for two Types of such disks.

Type S5 consists of a substrate, a single recording layer and a dummy substrate. The recording layer can be accessed from one side only. The capacity is 4,7 Gbytes for the 120 mm sized disk and 1,46 Gbytes for the 80 mm sized disk.

Type D10 consists of two substrates and two recording layers. From each side of the disk only one of the recording layers can be accessed. The capacity is 9,4 Gbytes for the 120 mm sized disk and 2,92 Gbytes for the 80 mm sized disk.

Data can be written onto the disk as marks in the form of amorphous spots in the crystalline recording layer and can be overwritten with a focused optical beam, using the phase change effect between amorphous and crystalline states. The data can be read with a focused optical beam, using the phase change effect as the difference in the reflectivity between amorphous and crystalline states. The beam accesses the recording layer through a transparent substrate of the disk.

Figure 1 shows schematically the two Types.

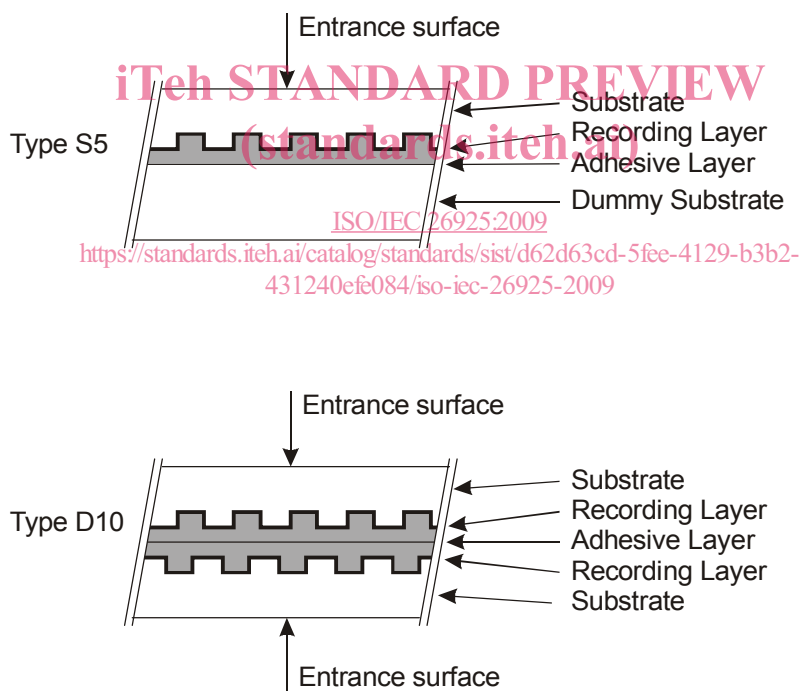


Figure 1 — Types of +RW HS disk

The efficiency and data reliability of +RW HS disks can be improved by the use of Background Formatting and Defect Management. An example of such a system is referred to in Annex N.

Unauthorized copying and/or redistribution of video data that is recorded in the DVD+R/+RW Video Format can be prevented by applying the Video Content Protection System as referred to in Annex O.

8 General Requirements

8.1 Environments

8.1.1 Test environment

In the test environment, the air immediately surrounding the disk shall have the following properties:

temperature	: 23 °C ± 2 °C
relative humidity	: 45 % to 55 %
atmospheric pressure	: 60 kPa to 106 kPa

No condensation on the disk shall occur. Before testing, the disk shall be conditioned in this environment for 48 h minimum. It is recommended that, before testing, the entrance surface of the disk shall be cleaned according to the instructions of the manufacturer of the disk.

Unless otherwise stated, all tests and measurements shall be made in this test environment.

8.1.2 Operating environment

This International Standard requires that a disk which meets all requirements of this International Standard in the specified test environment shall provide data interchange over the specified ranges of environmental parameters in the operating environment.

The operating environment is the environment where the air immediately surrounding the disk shall have the following properties:

temperature	: 5 °C to 55 °C
relative humidity	: 3 % to 85 %
absolute humidity	: 1 g/m ³ to 30 g/m ³
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 10 °C/h max.
relative humidity gradient	: 10 %/h max.

No condensation on the disk shall occur. If the disk has been exposed to conditions outside those specified in this Clause, it shall be acclimatized in an allowed operating environment for at least 2 h before use.

8.1.3 Storage environment

The storage environment is defined as the environment where the air immediately surrounding the disk shall have the following properties:

temperature	: -10 °C to 55 °C
relative humidity	: 3 % to 90 %
absolute humidity	: 1 g/m ³ to 30 g/m ³
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 15 °C/h max.
relative humidity gradient	: 10 %/h max.

No condensation on the disk shall occur.

8.1.4 Transportation

This International Standard does not specify requirements for transportation; guidance is given in Annex M.