



TECHNICAL REPORT

**Universal Mobile Telecommunications System (UMTS);
LTE;
Feasibility study
for evolved Universal Terrestrial Radio Access (UTRA) and
Universal Terrestrial Radio Access Network (UTRAN)
(3GPP TR 25.912 version 14.0.0 Release 14)**

STANDARD PREVIEW
GAINING INSIGHT
https://standards.itec.ai/standard/ist/bd19ca74-aaa3-4575-a5a4-e48577171115/et-125-912-v14.0.0-



Reference

RTR/TSGR-0025912ve00

Keywords

LTE,UMTS**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2017.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	7
1 Scope	8
2 References	8
3 Definitions, symbols and abbreviations	8
3.1 Definitions	8
3.2 Symbols.....	8
3.3 Abbreviations	9
4 Introduction	10
5 Deployment scenario.....	11
6 Radio interface protocol architecture for evolved UTRA	11
6.1 User plane.....	13
6.2 Control plane.....	13
7 Physical layer for evolved UTRA	14
7.1 Downlink transmission scheme	14
7.1.1 Basic transmission scheme based on OFDMA	14
7.1.1.1 Basic parameters	14
7.1.1.1.1 Modulation scheme	15
7.1.1.2 Multiplexing including reference-signal structure	15
7.1.1.2.1 Downlink data multiplexing	15
7.1.1.2.2 Downlink reference-signal structure.....	15
7.1.1.2.3 Downlink L1/L2 Control Signaling.....	15
7.1.1.3 MIMO and transmit diversity.....	16
7.1.1.4 MBMS.....	16
7.1.2 Physical layer procedure	16
7.1.2.1 Scheduling.....	16
7.1.2.2 Link adaptation	17
7.1.2.3 HARQ	17
7.1.2.4 Cell search.....	17
7.1.2.5 Inter-cell interference mitigation.....	18
7.1.3 Physical layer measurements	18
7.1.3.1 UE measurements	18
7.1.3.1.1 Measurements for Scheduling	18
7.1.3.1.1.1 Channel Quality Measurements.....	18
7.1.3.1.1.2 Measurements for Interference Coordination/Management.....	19
7.1.3.1.2 Measurements for Mobility	19
7.1.3.1.2.1 Intra-frequency neighbour measurements.....	19
7.1.3.1.2.2 Inter-frequency neighbour measurements.....	19
7.1.3.1.2.3 Inter RAT measurements	19
7.1.3.1.2.4 Measurement gap control.....	19
7.2 Uplink transmission scheme.....	19
7.2.1 Basic transmission scheme	19
7.2.1.1 Modulation scheme	20
7.2.1.2 Multiplexing including reference signal structure.....	20
7.2.1.2.1 Uplink data multiplexing	20
7.2.1.2.2 Uplink reference-signal structure	21
7.2.1.2.3 Multiplexing of L1/L2 control signaling	21
7.2.1.2.4 Uplink L1/L2 Control Signalling.....	21
7.2.1.3 MIMO	22
7.2.1.4 Power De-rating Reduction.....	22

7.2.2	Physical channel procedure.....	22
7.2.2.1	Random access procedure	22
7.2.2.1.1	Non-synchronized random access	22
7.2.2.1.1.1	Power control for non-synchronized random access.....	22
7.2.2.1.2	Synchronized random access.....	22
7.2.2.2	Scheduling.....	22
7.2.2.3	Link adaptation	23
7.2.2.4	Power control	23
7.2.2.5	HARQ	23
7.2.2.6	Uplink timing control.....	23
7.2.2.7	Inter-cell interference mitigation.....	23
8	Layer 2 and RRC evolution for evolved UTRA.....	24
8.1	MAC sublayer	25
8.1.1	Services and functions	25
8.1.2	Logical channels	25
8.1.2.1	Control channels	26
8.1.2.2	Traffic channels.....	26
8.1.3	Mapping between logical channels and transport channels	26
8.1.3.1	Mapping in Uplink	27
8.1.3.2	Mapping in downlink	27
8.2	RLC sublayer.....	27
8.3	PDCP sublayer	28
8.4	RRC.....	28
8.4.1	Services and functions	28
8.4.2	RRC protocol states & state transitions	29
9	Architecture for evolved UTRAN	30
9.1	Evolved UTRAN architecture	30
9.2	Functional split.....	30
9.3	Interfaces	31
9.3.1	S1 interface	31
9.3.1.1	Definition	31
9.3.1.2	S1-C RNL protocol functions	31
9.3.1.3	S1-U RNL protocol functions	31
9.3.1.4	S1-X2 similarities	31
9.3.2	X2 interface	31
9.3.2.1	Definition	31
9.3.2.2	X2-C RNL Protocol Functions.....	32
9.3.2.3	X2-U RNL Protocol Functions	32
9.4	Intra-LTE-access-system mobility	32
9.4.1	Intra-LTE-access-system mobility support for UE in LTE_IDLE.....	32
9.4.2	Intra LTE-Access-System Mobility Support for UE in LTE_ACTIVE.....	32
9.4.2.1	Description of Intra-LTE-Access Mobility Support for UEs in LTE_ACTIVE	32
9.4.2.2	Solution for Intra-LTE-Access Mobility Support for UEs in LTE_ACTIVE	32
9.4.2.2.1	C-plane handling:	32
9.4.2.2.2	U-plane handling	34
9.5	Inter 3GPP access system mobility	34
9.5.1	Inter 3GPP access system mobility in Idle state	34
9.5.2	Inter 3GPP access system mobility handover	34
9.6	Resource establishment and QoS signalling.....	34
9.6.1	QoS concept and bearer service architecture	34
9.6.2	Resource establishment and QoS signalling	34
9.7	Paging and C-plane establishment.....	36
9.8	Evaluations on for E-UTRAN architecture and migration	36
9.9	Support of roaming restrictions in LTE_ACTIVE	36
10	RF related aspects of evolved UTRA.....	37
10.1	Scalable bandwidth.....	37
10.2	Spectrum deployment.....	37
11	Radio resource management aspects of evolved UTRA	38
11.1	Introduction	38

11.2	Definition and description of RRM functions	38
11.2.1	Radio Bearer Control (RBC)	38
11.2.2	Radio Admission Control (RAC).....	38
11.2.3	Connection Mobility Control (CMC)	38
11.2.4	Packet Scheduling (PSC)	39
11.2.5	Inter-cell Interference Coordination (ICIC).....	39
11.2.6	Load Balancing (LB)	39
11.2.7	Inter-RAT Radio Resource Management	39
11.3	RRM architecture in LTE.....	39
11.4	Support of load sharing and policy management across different Radio Access Technologies (RATs).....	40
12	System and terminal complexity	40
12.1	Over all system complexity	40
12.2	Physical layer complexity	40
12.3	UE complexity.....	41
13	Performance assessments	42
13.1	Peak data rate	42
13.2	C-plane latency.....	43
13.2.1	FDD frame structure	44
13.2.2	TDD frame structure type 1	45
13.2.3	TDD frame structure type 2	47
13.3	U-plane latency	47
13.3.1	FDD frame structure	48
13.3.2	TDD frame structure type 1	49
13.3.3	TDD frame structure type 2	50
13.4	User throughput.....	51
13.4.1	Fulfilment of uplink user-throughput targets	51
13.4.1.1	Initial performance evaluation.....	51
13.4.1.2	UL user throughput performance evaluation	51
13.4.2	Fulfilment of downlink user-throughput targets	52
13.4.2.0	Initial performance evaluation.....	52
13.4.2.1	Fulfilment of downlink user-throughput targets by enhancement techniques.....	52
13.4.2.1.1	Performance Enhancement by Additional Transmit Antennas: 4 Transmit Antennas	53
13.4.2.2	DL user throughput performance evaluation.....	53
13.5	Spectrum efficiency.....	54
13.5.1	Fulfilment of uplink spectrum-efficiency target	54
13.5.1.1	Initial performance evaluation	54
13.5.1.2	UL spectrum efficiency performance evaluation	54
13.5.2	Fulfilment of downlink spectrum-efficiency target	55
13.5.2.0	Initial performance evaluation	55
13.5.2.1	Fulfilment of downlink spectrum-efficiency targets by enhancement techniques	55
13.5.2.2	DL spectrum efficiency performance evaluation	55
13.6	Mobility.....	56
13.6.1	Features supporting various mobile velocities.....	56
13.6.2	Assessment on U-plane interruption time during handover.....	57
13.6.3	Means to minimise packet loss during handover	59
13.7	Coverage.....	59
13.8	Support for point to multipoint transmission.....	60
13.8.1	Initial performance evaluation	61
13.8.2	MBSFN performance evaluation	61
13.9	Network synchronisation.....	61
13.10	Co-existence and inter-working with 3GPP RAT	62
13.11	General requirements	62
13.11.1	Cost related requirements	62
13.11.2	Service related requirements.....	63
13.12	VoIP performance evaluation.....	63
14	Conclusions and Recommendations.....	63
14.1	Conclusions	63
14.2	Recommendations	64
Annex A (informative):	Change History	65

History66

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/bd9ca74-aaa3-4575-a5a1-4c400e4e73fb/etsi-tr-125-912-v14.0.0-2017-04>

Foreword

This Technical Report has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

ITeH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/bd9e74-aaa3-4575-a5a1-4c400e4e73fb/etsi-tr-125-912-v14.0.0>
2017-04

1 Scope

This present document is the technical report for the study item "Evolved UTRA and UTRAN" [1]. The objective of the study item is to develop a framework for the evolution of the 3GPP radio-access technology towards a high-data-rate, low-latency and packet-optimized radio access technology.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] [3GPP TD RP-040461](#): "Proposed Study Item on Evolved UTRA and UTRAN".
- [2] [3GPP TR 25.814](#): "Physical Layer Aspects for Evolved UTRA".
- [3] [3GPP TR 23.882](#): "3GPP System Architecture Evolution: Report on Technical Options and Conclusions"
- [4] [3GPP TR 25.913](#): "Requirements for Evolved UTRA (E-UTRA) and Evolved UTRAN (E-UTRAN)"
- [5] [3GPP TR 25.813](#): "Evolved UTRA (E-UTRA) and Evolved UTRAN (E-UTRAN): Radio Interface Protocol Aspects."
- [6] [3GPP TD RP-060292](#) R3.018: "E-UTRA and E-UTRAN; Radio access architecture and interfaces."
- [7] Recommendation ITU-R SM.329-10: "Unwanted emissions in the spurious domain"
- [8] [3GPP TD R4-060660](#): "E-UTRA Radio Technology Aspects V0.1.0", NTT DoCoMo
- [9] [3GPP TD R4-051146](#): "Some operators requirements for prioritisation of performance requirements work in RAN WG4"
- [10] 3GPP TD R1-070674: "LTE physical layer framework for performance verification"
Orange, China Mobile, KPN, NTT DoCoMo, Sprint, T-Mobile, Vodafone, Telecom Italia.

3 Definitions, symbols and abbreviations

3.1 Definitions

void

3.2 Symbols

void

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACK	Acknowledgement
ACLR	Adjacent Channel Leakage Ratio
aGW	Access Gateway
AM	Acknowledge Mode
ARQ	Automatic Repeat Request
AS	Access Stratum
BCCH	Broadcast Control Channel
BCH	Broadcast Channel
C/I	Carrier-to-Interference Power Ratio
CAZAC	Constant Amplitude Zero Auto-Correlation
CMC	Connection Mobility Control
CP	Cyclic Prefix
C-plane	Control Plane
CQI	Channel Quality Indicator
CRC	Cyclic Redundancy Check
DCCH	Dedicated Control Channel
DL	Downlink
DRX	Discontinuous Reception
DTCH	Dedicated Traffic Channel
DTX	Discontinuous Transmission
eNB	E-UTRAN NodeB
EPC	Evolved Packet Core
E-UTRA	Evolved UTRA
E-UTRAN	Evolved UTRAN
FDD	Frequency Division Duplex
FDM	Frequency Division Multiplexing
GERAN	GSM EDGE Radio Access Network
GNSS	Global Navigation Satellite System
GSM	Global System for Mobile communication
HARQ	Hybrid ARQ
HO	Handover
HSDPA	High Speed Downlink Packet Access
ICIC	Inter-Cell Interference Coordination
IP	Internet Protocol
LB	Load Balancing
LCR	Low Chip Rate
LTE	Long Term Evolution
MAC	Medium Access Control
MBMS	Multimedia Broadcast Multicast Service
MCCH	Multicast Control Channel
MCS	Modulation and Coding Scheme
MIMO	Multiple Input Multiple Output
MME	Mobility Management Entity
MTCH	MBMS Traffic Channel
NACK	Non-Acknowledgement
NAS	Non-Access Stratum
OFDM	Orthogonal Frequency Division Multiplexing
OFDMA	Orthogonal Frequency Division Multiple Access
PA	Power Amplifier
PAPR	Peak-to-Average Power Ratio
PCCH	Paging Control Channel
PDCP	Packet Data Convergence Protocol
PDU	Packet Data Unit
PHY	Physical layer
PLMN	Public Land Mobile Network
PRB	Physical Resource Block
PSC	Packet Scheduling

QAM	Quadrature Amplitude Modulation
QoS	Quality of Service
RAC	Radio Admission Control
RACH	Random Access Channel
RAT	Radio Access Technology
RB	Radio Bearer
RBC	Radio Bearer Control
RF	Radio Frequency
RLC	Radio Link Control
RNL	Radio Network Layer
ROHC	Robust Header Compression
RRC	Radio Resource Control
RRM	Radio Resource Management
RU	Resource Unit
S1	interface between eNB and aGW
S1-C	S1-Control plane
S1-U	S1-User plane
SAE	System Architecture Evolution
SAP	Service Access Point
SC-FDMA	Single Carrier – Frequency Division Multiple Access
SCH	Synchronization Channel
SDMA	Spatial Division Multiple Access
SDU	Service Data Unit
SFN	Single Frequency Network
TA	Tracking Area
TB	Transport Block
TCP	Transmission Control Protocol
TDD	Time Division Duplex
TM	Transparent Mode
TNL	Transport Network Layer
TTI	Transmission Time Interval
UE	User Equipment
UL	Uplink
UM	Un-acknowledge Mode
UMTS	Universal Mobile Telecommunication System
UPE	User Plane Entity
U-plane	User plane
UTRA	Universal Terrestrial Radio Access
UTRAN	Universal Terrestrial Radio Access Network
VRB	Virtual Resource Block
X2	interface between eNBs
X2-C	X2-Control plane
X2-U	X2-User plane

4 Introduction

At the 3GPP TSG RAN #26 meeting, the SI description on "Evolved UTRA and UTRAN" was approved [1].

The justification of the study item was, that with enhancements such as HSDPA and Enhanced Uplink, the 3GPP radio-access technology will be highly competitive for several years. However, to ensure competitiveness in an even longer time frame, i.e. for the next 10 years and beyond, a long-term evolution of the 3GPP radio-access technology needs to be considered.

Important parts of such a long-term evolution include reduced latency, higher user data rates, improved system capacity and coverage, and reduced cost for the operator. In order to achieve this, an evolution of the radio interface as well as the radio network architecture should be considered.

Considering a desire for even higher data rates and also taking into account future additional 3G spectrum allocations the long-term 3GPP evolution should include an evolution towards support for wider transmission bandwidth than 5 MHz. At the same time, support for transmission bandwidths of 5MHz and less than 5MHz should be investigated in order to allow for more flexibility in whichever frequency bands the system may be deployed

5 Deployment scenario

A very large set of scenarios are foreseen, as stated in 25.913 [4]:

- Standalone deployment scenario: In this scenario the operator is deploying E-UTRAN either with no previous network deployed in the area or it could be deployed in areas where there is existing UTRAN/GERAN coverage but for any reason there is no requirement for interworking with UTRAN/GERAN (e.g. standalone wireless broadband application).
- Integrating with existing UTRAN and/or GERAN deployment scenario: In this scenario it is assumed that the operator is having either a UTRAN and/or a GERAN network deployed with full or partial coverage in the same geographical area. It is assumed that the GERAN and UTRAN networks respectively can have differently levels of maturity.

In order to enable the large number of possibilities, E-UTRAN will support the following:

- 1) shared networks, both in initial selection and in mobile-initiated (controlled by system broadcast) and network-initiated/–controlled mobility.
- 2) high-velocity and nomadic mobiles. Mobility mechanisms include a handover mechanism with short latency, short interruption and minimizing of data losses (when the user has high data activity). Hence both high mobile velocities and Conversational QoS can be supported (as elaborated in 13.6).
- 3) various cell sizes and radio environments. The radio aspects are analyzed in chapter 10, but the specified mobility mechanisms are deemed adequate to support different cell sizes (also mixed) and both planned or adhoc deployments.
Note: ad hoc deployment inherently does not support high user QoS classes.
- 4) co-operation with legacy systems as required in 25.913 chapter 8.4. In particular Handover to and from GERAN and UTRAN is supported. Handover can be triggered by combinations of radio quality and requested bearer quality. This capability enables all combinations of E-UTRAN and GERAN/UTRAN coverage, ranging from full to partial coverage, overlapping to adjacent coverage and ranging from co-siting (with re-use of equipment) to separate sites for LTE, as required in 25.913 chapter 8.3. It also enables operator control of RAT and QoS selection per user.
- 5) The requirement on efficiency is to a large extent determined by radio functions (described in chapters 9 and 10, analyzed in chapter 13). However, the designed mobility procedures are (for the intra-E-UTRAN case) potentially considerably faster than the ones in legacy systems and can thus be considered to support the requirement on efficiency (as described in detail in 13.6.2).

E-UTRAN also supports the requirements of:

- 6) Simplicity, due to only one type of node.
- 7) Low user data delay, due to low number of nodes in the data path

E-UTRAN shall support IP transport networks and all data link options. E-UTRAN will use separated RNL and TNL QoS. This permits co-use of existing transport networks.

6 Radio interface protocol architecture for evolved UTRA

The E-UTRAN consists of eNBs, providing the E-UTRA U-plane (RLC/MAC/PHY) and C-plane (RRC) protocol terminations towards the UE. The eNBs interface to the aGW via the S1 [5].

Figure 6.1 below gives an overview of the E-UTRAN architecture where yellow-shaded boxes depict the logical nodes, white boxes depict the functional entities of the C-plane, and blue boxes depict the functional entities of the U-plane.

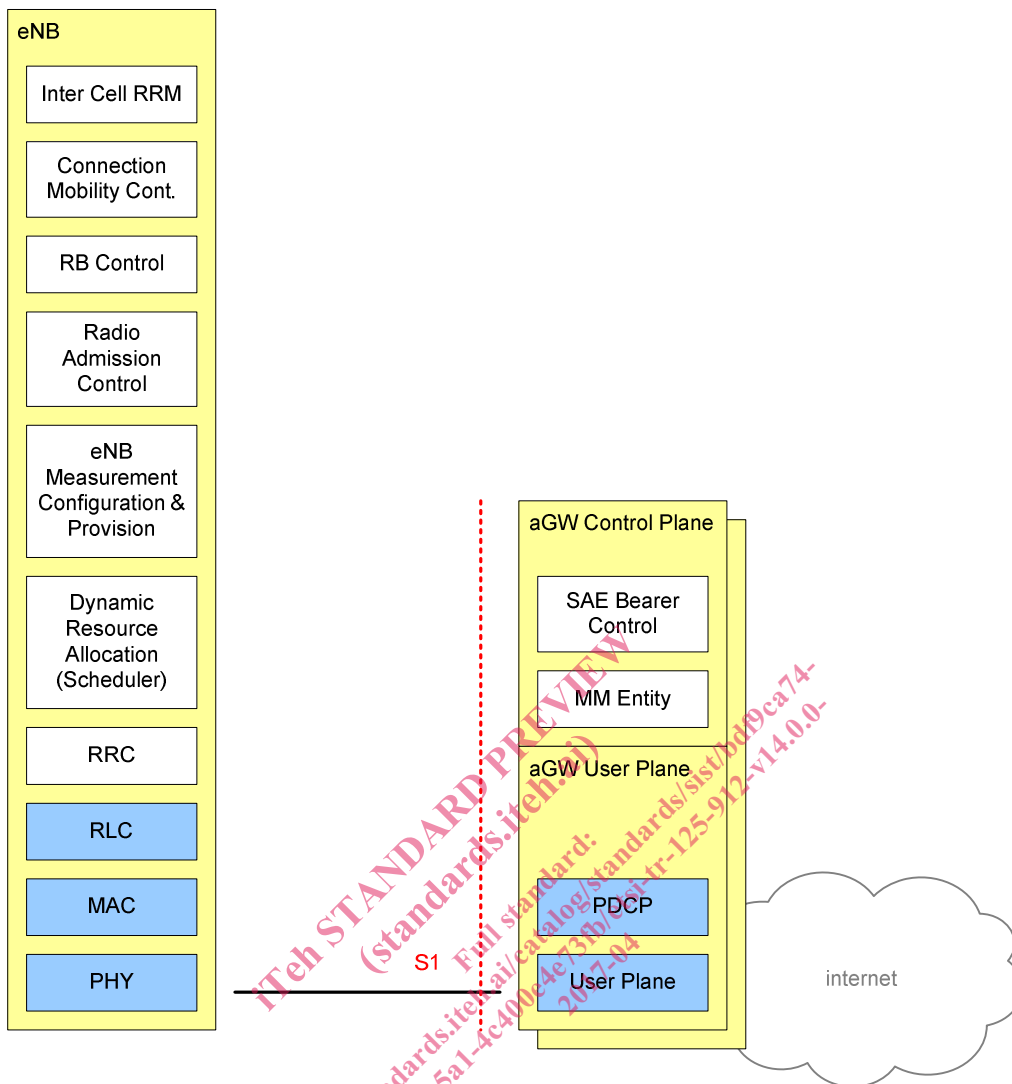


Figure 6.1: E-UTRAN Architecture

The functions hosted by the eNB are:

- Selection of aGW at attachment;
- Routing towards aGW at RRC activation;
- Scheduling and transmission of paging messages;
- Scheduling and transmission of BCCH information;
- Dynamic allocation of resources to UEs in both uplink and downlink;
- The configuration and provision of eNB measurements;
- Radio Bearer Control;
- Radio Admission Control;
- Connection Mobility Control in LTE_ACTIVE state.

The functions hosted by the aGW are:

- Paging origination;
- LTE_IDLE state management;