



DRAFT INTERNATIONAL STANDARD ISO/DIS 10924-2

ISO/TC 22/SC 3

Secretariat: DIN

Voting begins on
2011-12-16

Voting terminates on
2012-05-16

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Road vehicles — Circuit breakers —

Part 2: User's guide

Véhicules routiers — Coupe-circuits —

Partie 2: Guide de l'utilisateur

ICS 43.040.10

In accordance with the provisions of Council Resolution 15/1993 this document is circulated in the English language only.

Conformément aux dispositions de la Résolution du Conseil 15/1993, ce document est distribué en version anglaise seulement.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.

Pour accélérer la distribution, le présent document est distribué tel qu'il est parvenu du secrétariat du comité. Le travail de rédaction et de composition de texte sera effectué au Secrétariat central de l'ISO au stade de publication.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/31512873-bdad-4a58-ad4a-3cb3d51ea60f/iso-10924-2-2014>

Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General	1
4.1 Circuit breaker nominal voltage	2
4.2 Supply voltage maximum U_{smax}	2
4.3 Rated current I_R and continuous current	2
5 Current and conductors (cables)	3
6 Current and contact resistance	4
7 Current and ambient temperature	4
8 Cable protection: temperature versus current characteristics	4
9 Selectivity	5
10 Replacement of circuit breakers	6
11 Voltage peaks during opening of circuit breakers	6
12 Inrush withstand characteristics of circuit breakers	6
13 Electromagnetic compatibility (EMC)	6
Annex A (informative) Selection procedure for circuit breakers and cables	7
Annex B (informative) Selection of circuit breakers	21
Annex C (informative) Ambient temperature influence	22

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10924-2 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electric and electronic equipment*.

ISO 10924 consists of the following parts, under the general title *Road vehicles — Circuit breakers*:

- *Part 1: Definitions and general test requirements*
- *Part 2: User's guide*
- *Part 4: Medium circuit breakers with tabs (Blade type), Form CB 15*

The following parts are under preparation:

- *Part 3: Miniature circuit breakers with tabs (Blade type), Form CB 11*
- *Part 5: High current circuit breakers with tabs (Blade type), Form CB 29*
- *Part 6: Circuit breakers with bolt-in contacts*

Road vehicles — Circuit breakers —

Part 2: User's guide

1 Scope

This part of ISO 10924 gives guidance for the choice and application of automotive circuit breakers. It describes the various parameters which have to be taken into account when selecting circuit breakers.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8820-1, *Road vehicles -- Fuse-links -- Part 1: Definitions and general test requirements*

ISO 10924-1, *Road vehicles – Circuit breakers - Part 1: Definitions and general test requirements*

ISO 16750-1, *Road vehicles - Environmental conditions and testing for electrical and electronic equipment -- Part 1: General*

ISO 16750-2, *Road vehicles - Environmental conditions and testing for electrical and electronic equipment -- Part 2: Electrical loads*

3 Terms and definitions

For the purposes of this part of ISO 10924 the terms and definitions given in ISO 8820-1 and ISO 10924-1 shall apply.

4 General

The various Parts of ISO 10924 define basic requirements and test methods for nominal voltage, rated current I_R and time/current characteristics to give comparable and reproducible results of circuit breakers.

In practice however there are other parameters to be considered for the correct selection of circuit breakers in road vehicles, such as

- continuous current,
- operating time,
- overload protection of one or more electrical/electronic devices,
- connection resistance,
- types of cables: e.g. different cross section, length, insulation, bundeling,

- internal resistances (voltage drop) of the circuit breakers, contacts, cables and devices,
- power dissipation of the components comprising the system,
- short-circuit parameters,
- inrush parameters of devices,
- operating mode of the load,
- operating of one or more electrical/electronic devices
- orientation and location of the circuit breakers: e.g. engine, passenger or luggage compartment,
- different currents, voltages and temperatures of the system and surroundings,
- fixtures and boxes used with circuit breakers and/or circuit breakers,
- orientation and location of the circuit breakers: e.g. engine, passenger or luggage compartment,
- distances or clearances inside circuit breaker boxes or holders,
- different circuit breaker holders and boxes
- environmental conditions (mechanical loads, climatic loads, chemical loads)
- forced cooling of the circuit breakers.

NOTE Users are advised to consult the manufacturers of circuit-breaker, contacts and cables, because not all of the above points can be addressed in this guide.

The parameters listed are not intended to cover all the possible parameters that need to be taken into consideration for circuit breaker selection nor is it intended that all parameters will need to be considered in each vehicle applications.

4.1 Circuit breaker nominal voltage

The nominal voltage identifying the voltage of the system shelf (see ISO 16750-1).

4.2 Supply voltage maximum U_{smax}

The circuit breaker has to withstand the maximum supply voltage of the electrical system of the vehicle (see ISO 16750-2).

4.3 Rated current I_R and continuous current

The rated current (I_R) is the current used for identifying the circuit breaker.

The continuous current (I_C) in Figure 1 is the maximum current with the circuit can continuously carry under specified conditions: ambient temperature (23°C), duration maximum 1 h, standard test holder, cross sections of wires. The continuous current can be lower than the rated current I_R .

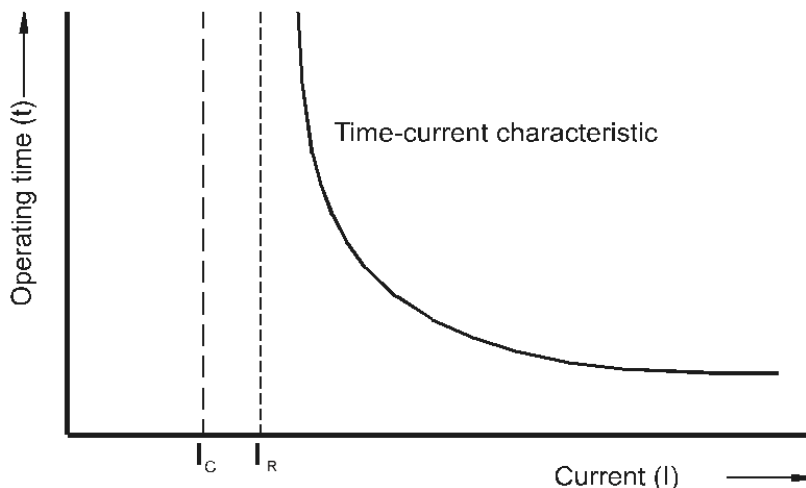


Figure 1 — Rated current I_R , continuous current and time-current characteristic

5 Current and conductors (cables)

The temperature rise of a cable is a function of current, conductor cross-section, strands, insulating materials time duration and ambient temperature.

Figure 2 shows stabilised temperature rise for various conductor cross sections at RT.

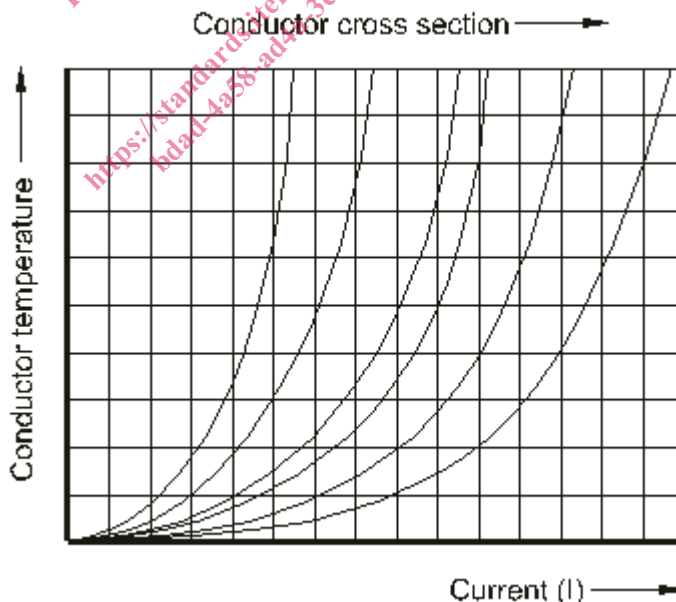


Figure 2 — Conductor temperatures for different conductor cross sections vs. current at RT

6 Current and contact resistance

A higher resistance of mated terminals will result in a temperature rise and reduced thermal conduction away from the circuit breaker. Hence, the temperature of the circuit breaker terminal will be higher and the continuous current for the application lower.

A temperature rise test may be conducted using circuit breakers, circuit breaker holders and connections as specified by the vehicle manufacturer. At a specified test current the temperature of the connections shall be measured at the points at the tabs of the circuit breaker where protrude from the base of the circuit breaker body (See appropriate part of ISO 8820). After thermal equilibrium has been achieved the temperature rise of the connection shall not exceed the limits as specified for terminals and cable.

7 Current and ambient temperature

All components of a circuit and their parts have their own characteristic curve as shown in Figure 3.

Each component in a circuit has an upper temperature limit. An increase of temperature result in increased resistance, which can by itself increases the temperature. As a result, the circuit breaker may trip. It is always recommended to consult with specific manufacturers of circuit breakers for current versus temperature curves as both design and thermal materials used result in different curve characteristics.

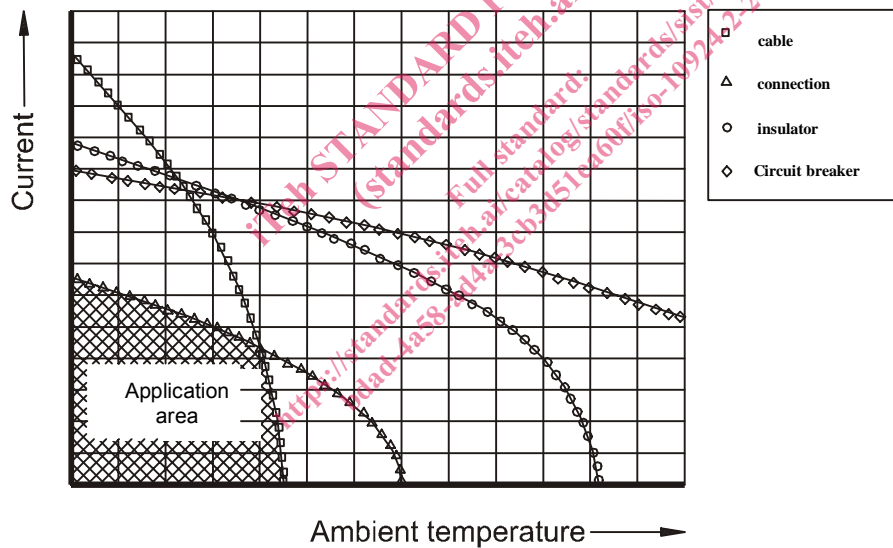


Figure 3 — Maximum continuous currents of circuit components vs. ambient temperature

8 Cable protection: temperature versus current characteristics

To ensure satisfactory cable protection, circuit breakers shall be chosen such that they will always open before the maximum allowed cable temperature t_{max} is exceeded. Figure 4 shows the correct circuit breaker selection. The maximum allowed temperature is never exceeded, because above a certain minimal operating current (I_c), the circuit breaker will trip before the maximum permitted temperature of the cable is exceeded.

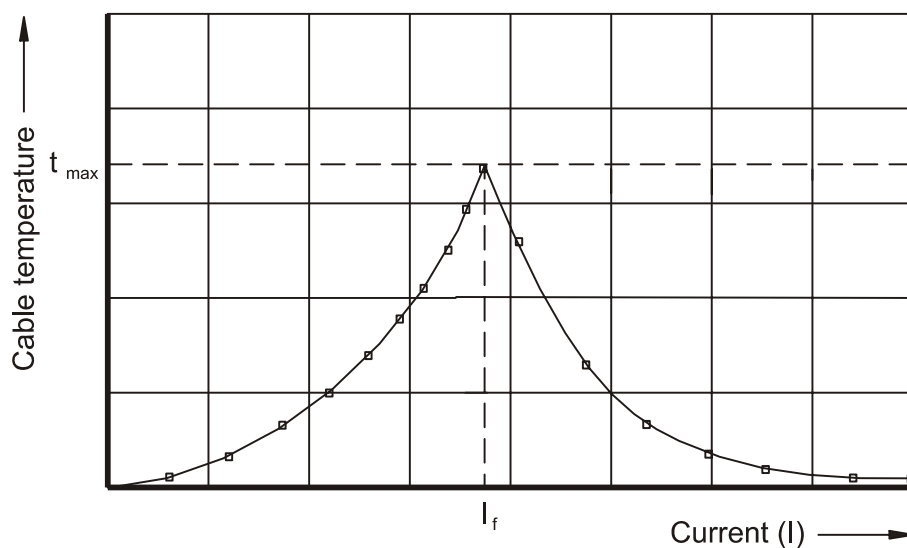


Figure 4 — Correct circuit breaker selection

Figure 5 shows incorrect circuit breaker selection. The circuit breaker allows some potentially damaging current to flow for too long, causing the cable to overheat.

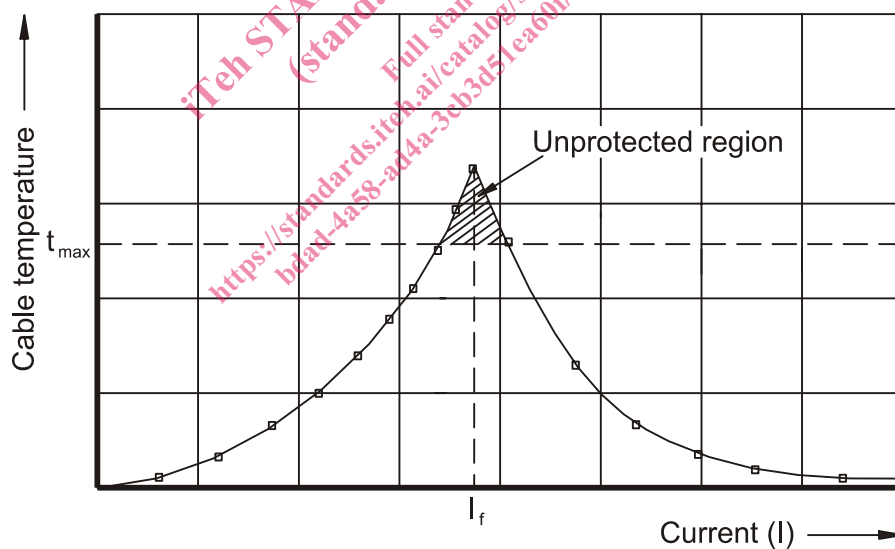


Figure 5 — Incorrect circuit breaker selection

9 Selectivity

It shall be ensured that higher level circuit breakers do not trip when lower level circuit breakers are opening (see Fig. 6).

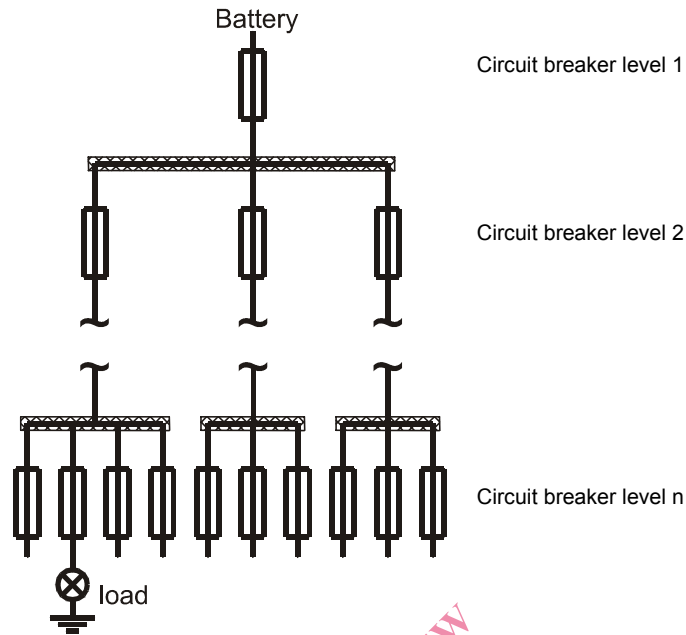


Figure 6 — Example for a structure hierarchy

10 Replacement of circuit breakers

The replacement of circuit breakers in a circuit shall be performed with the circuit de-energised.

11 Voltage peaks during opening of circuit breakers

During the opening process of the circuit breaker voltage peaks can occur. The peaks can achieve 6 times the rated voltage.

12 Inrush withstand characteristics of circuit breakers

In selecting a circuit breaker, not only the continuous current and the rated current I_R are to be considered but also the inrush characteristics of electrical devices.

The inrush characteristic describes the time-current behaviour of electrical devices until the stabilised continuous current has been attained.

It is important to consider the inrush withstand characteristics as there are different requirements on the circuit breaker depending on the type of load. The circuit breaker shall withstand the inrush energy without opening. If the inrush energy is either too high or too long, or a combination thereof, it may be necessary to select a higher rated circuit breaker to eliminate nuisance openings.

13 Electromagnetic compatibility (EMC)

For circuit breakers as passive components EMC tests are not necessary.