# ETSI TS 118 120 V2.1.2 (2020-03)



oneM2M;
WebSocket Protocol Binding
(oneM2M TS-0020 version 2.1.2 Release 2A)



# Reference RTS/oneM2M-000020v2A Keywords IoT, M2M, protocol

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

The present document can be downloaded from: http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at <a href="https://www.etsi.org/deliver">www.etsi.org/deliver</a>.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at <a href="https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx">https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx</a>

If you find errors in the present document, please send your comment to one of the following services: https://portal.etsi.org/People/CommitteeSupportStaff.aspx

#### **Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020. All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

# Contents

Intelle	ectual Property Rights	4
Forev	word	4
1	Scope	
_	•	
2	References	
2.1	Normative references	
2.2	Informative references	5
3	Definition of terms, symbols and abbreviations	
3.1	Terms	
3.2	Symbols	
3.3	Abbreviations	6
4	Conventions	6
5	Overview on WebSocket Binding	6
5.1	Use of WebSocket	
5.2	Binding Overview	
6	Protocol Rinding	10
6.1	Protocol Binding	10 10
6.2	Introduction  WebSocket connection establishment  General	10
6.2.1	General	10
6.2.2	Client handshake	10 10
6.2.2.1	1 Format of request line	10
6.2.2.2	2 Host header	10
6.2.2.3	2 Host Header	10
6.2.2. <sup>2</sup>	A Connection header	11
6.2.2.5	5 Sac WahSocket Kay harder	11
6.2.2.6		11
6.2.2.7		11
6.2.2.8		11
6.2.2.9		
6.2.3	Server handshake format	
6.2.3.1	1 Format of status line 14 14 15	12
6.2.3.2		12
6.2.3.3	3 Connection header	12
6.2.3.4		
6.2.3.5	•	
6.2.3.6		
6.3	Closing WebSocket connection	
6.4	Registration procedure	
6.5	Handling of Non-Registration Request	
6.6	Use of proxy servers	
7	Security Aspects	14
Anne	ex A (informative): Example Procedures	15
A.1	AE Registration and creation of a Container child resource	
Histo	-	1.0
	n v	I C

# Intellectual Property Rights

#### **Essential patents**

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Trademarks**

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

# **Foreword**

This Technical Specification (TS) has been produced by ETSI Partnership Project oneM2M (oneM2M).

# 1 Scope

The present document specifies the binding of Mca and Mcc primitives onto the WebSocket binding.

It specifies:

- Procedures and message formats for operating and closing of WebSocket connections.
- How request and response primitives are mapped into the payload of the WebSocket protocol.

## 2 References

#### 2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <a href="https://docbox.etsi.org/Reference/">https://docbox.etsi.org/Reference/</a>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] IETF RFC 6455 (December 2011): "The WebSocket Protocol".
- [2] ETSI TS 118 101: "oneM2M; Functional Architecture (oneM2M TS-0001)".
- [3] IETF RFC 7230 (June 2014): "Hypertext Transport Protocol (HTTP/1.1): Message Syntax and Routing".
- [4] ETSI TS 118 103: "oneM2M. Security solutions (oneM2M TS-0003)".
- [5] ETSI TS 118 104: "oneM2M; Service Layer Core Protocol Specification (oneM2M TS-0004)".
- [6] IETF RFC 7692 (December 2015): "Compression Extension for WebSocket".

### 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

[i.1] oneM2M Drafting Rules.

NOTE: Available at <a href="http://www.onem2m.org/images/files/oneM2M-Drafting-Rules.pdf">http://www.onem2m.org/images/files/oneM2M-Drafting-Rules.pdf</a>.

#### 3 Definition of terms, symbols and abbreviations

#### 3.1 **Terms**

For the purposes of the present document, the following terms apply:

oneM2M WebSocket Client (WS Client): WebSocket Client associated with an AE or a CSE capable of establishing the WebSocket connections

oneM2M WebSocket Server (WS Server): WebSocket Server associated with a CSE which accepts requests to establish WebSocket connections

#### 3.2 **Symbols**

Void.

#### 3.3 **Abbreviations**

For the purposes of the present document, the following abbreviations apply:

Application Dedicated Node **ADN** ΑE **Application Entity** ASN Application Service Node Concise Binary Object Representation **CBOR** Communication Management and Delivery Handling **CMDH** Hypertext Transport Protocol
Internet Engineering Task Force
Infrastructure Node Common Servering
Internet Protocol
JavaScript Ob:
Mid-31 **CRUDN CSE FQDN GUID HTTP IETF IN-CSE** ΙP **JSON** 

Middle Node MN

MN-CSE Middle Node Common Services Entity

Network Address Translator NAT **Request for Comments RFC** 

**SAEF** Security Association Establishment Framework

TCP **Transmission Control Protocol** TLS Transport Laver Security Uniform Resource Identifier URI

WS WebSocket WSS WebSocket Secure

**XML** eXtensible Markup Language

#### 4 Conventions

The key words "Shall", "Shall not", "May", "Need not", "Should", "Should not" in the present document are to be interpreted as described in the oneM2M Drafting Rules [i.1].

# 5 Overview on WebSocket Binding

#### 5.1 Use of WebSocket

This binding makes use of the WebSocket protocol IETF RFC 6455 [1] to transport serialized representations of oneM2M request and response primitives over the Mca or Mcc reference points.

Establishment of a WebSocket connection shall be initiated by a WebSocket client by sending a handshake to a WebSocket server as specified in section 4 of IETF RFC 6455 [1]. Once the WebSocket connection is established, both oneM2M request and response primitives can be exchanged bi-directionally between the two endpoints of the connection. Serialized representations of the request and response primitives shall be mapped in the Payload Data field of the WebSocket base framing protocol, as defined in section 5.2 of IETF RFC 6455 [1].

A WebSocket connection employs either a TCP/IP or a TLS over TCP/IP connection. The underlying TCP and TLS connections are established as the first step of the WebSocket handshake.

# 5.2 Binding Overview

WebSocket binding may be employed for communication between any two endpoints which can be connected over the Mca, Mcc or Mcc' interface reference points supported by the oneM2M Architecture as shown in figure 6.1-1 of ETSI TS 118 101 [2].

When using the WebSocket protocol, one communication endpoint shall act as the WebSocket server. The WebSocket server listens for inbound handshake messages arriving from any WebSocket client to which a WebSocket connection is not yet established. Whether a communication endpoint takes the role of the client or the server shall depend on the registration relationship between the communicating entities as follows: the registree shall always use a WebSocket client, while the associated registrar shall always use a WebSocket server on the respective reference point.

This implies that ADN and ASN always take the role of a WebSocket client when WebSocket binding is employed. An MN-CSE uses a WebSocket server to communicate with its registrees and a WebSocket client to communicate with its own registrar (which can be another MN-CSE).

The IN-CSE provides a WebSocket server functionality to communicate with all its registrees, i.e. within a service provider's domain. On the Mcc' reference points, i.e. for communication between IN-CSEs of different Service Provider domains, the IN-CSE shall provide both WebSocket client and server functionality. This enables any IN-CSE to open a WebSocket connection to any IN-CSE of another Service Provider's domain.

Figure 5.2-1 shows some applicable example system configuration.

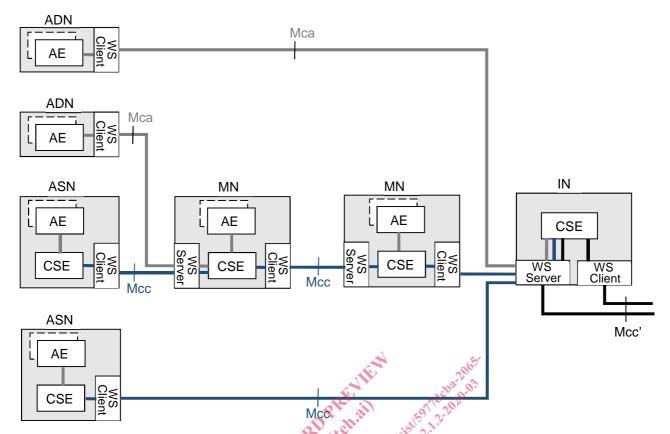


Figure 5.2-1: Example scenarios of WebSocket client and server configurations

There exists a maximum of one WebSocket connection between two nodes. A WebSocket connection is established for the first time when the initial registration procedure of an entity to its registrar is performed. On an established WebSocket connection, request and response primitives can be exchanged in both directions. Any connection may be closed by either the WebSocket client or the server, depending on the communication schedule of either entity. However, the connection can be reopened from the client side only.

If the connection is closed temporarily, it shall be reopened when the next request primitive is sent from the client to the server side, or when the time to become reachable configured at <schedule> resource. If the WebSocket connection with the next-hop entity is not opened, and the WebSocket connection cannot be established due to lack of *pointOfAccess* address for the entity, a sending CSE may enable buffering of primitives which should be sent to the entity until the connection is reopened or their expiration time is reached. See Annex H of ETSI TS 118 104 [5] about buffering of primitives by CMDH functionality.

Figure 5.2-2 shows an example message flow for a scenario where an ADN-AE registers to its registrar MN-CSE using an unsecured TCP connection without proxy and then continues exchanging non-registration request and response primitives.

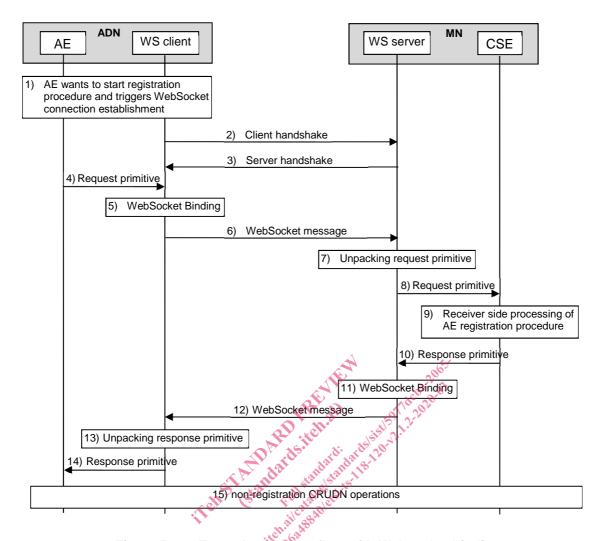


Figure 5.2-2: Example message flow with Websocket binding

- The ADN-AE wants to register to its registrar MN-CSE. If a WebSocket connection does not exist, it is established by the following steps 2) and 3). It is assumed that the ADN-AE knows the point of access (i.e. WebSocket URI specified in IETF RFC 6455 [1]) under which the registrar CSE can be reached with WebSocket binding.
- 2) The WebSocket client opens handshake to the server with subprotocol name 'oneM2M-pro-v1.0' following IETF RFC 6455 [1].

If the server can be reached under the WebSocket URI ws://example.net:9000/, the client handshake may look as follows:

```
GET / HTTP/1.1
Host: mncse1234.net:9000
Upgrade: WebSocket
Connection: Upgrade
Sec-WebSocket-Key: ud63env87LQLd4uIV20/oQ==
Sec-WebSocket-Protocol: oneM2M-pro-v1.0
Sec-WebSocket-Version: 13
```

3) The WebSocket server replies with a handshake to the client. In the successful case, the status-line of this HTTP response may look as follow:

```
Request-Version: HTTP/1.1
Status-Code: 101
Response-Phrase: Switching Protocols
Upgrade: WebSocket
Connection: Upgrade
Sec-WebSocket-Protocol: oneM2M-pro-v1.0
Sec-WebSocket-Accept: FuSSKANn17C/6/FrPMt70mfBY8E=
```