



Designation: D3535 – 07a

Standard Test Method for Resistance to Creep Under Static Loading for Structural Wood Laminating Adhesives Used Under Exterior Exposure Conditions¹

This standard is issued under the fixed designation D3535; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers adhesives suitable for the bonding of wood, including treated wood, into structural laminated wood products for general construction, for marine use, or for other uses where a high-strength general construction, creep-resistant, waterproof adhesive bond is required.

1.2 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 *ASTM Standards:*²

[A125 Specification for Steel Springs, Helical, Heat-Treated](#)

[D907 Terminology of Adhesives](#)

[D2559 Specification for Adhesives for Bonded Structural Wood Products for Use Under Exterior Exposure Conditions](#)

3. Terminology

3.1 *Definitions:*

3.1.1 *glulam, n*—synonym for structural-glued-laminated timber.

3.1.2 *structural-glued-laminated timber, n*—an engineered, stress-rated product of a timber laminating plant comprising

¹ This test method is under the jurisdiction of ASTM Committee D14 on Adhesives and is the direct responsibility of Subcommittee D14.30 on Wood Adhesives.

Current edition approved May 1, 2007. Published May 2007. Originally approved in 1976. Last previous edition approved in 2007 as D3535 – 07. DOI: 10.1520/D3535-07A.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

assemblies of specially selected and prepared wood laminations securely bonded together with adhesives, with the following characteristics: (1) the grain of all laminations is approximately parallel longitudinally; and (2) the laminations may be comprised of pieces end-joined to form any length, of pieces placed or glued edge-to-edge to make wider ones or of pieces bent to curved form during gluing. (Synonym *glulam*) ANSI/AITC A190.1 – 2002, American National Standard for Wood Products—Structural Glued Laminated Timber (Edited to conform with ASTM format).

3.1.3 For other terms used in this test method, refer to Terminology D907.

4. Summary of Test Method

4.1 Glued laminations are subjected to a constant load under various combinations of temperature and relative humidity. The amount of creep is measured.

5. Significance and Use

5.1 This test method rates the performance of the adhesive in laminated wood as measured by resistance to creep under static load.

5.2 This test method will normally be used in conjunction with Specification D2559.

6. Apparatus

6.1 *Compression-Type Creep Tester*, as shown in Fig. 1,³ required for testing the specimens under the static load. This tester consists of:

- 6.1.1 *Base Plate*,
- 6.1.2 *Four Tension Rods*,
- 6.1.3 *Spacer Plate*,
- 6.1.4 *Center Rod*,


³ Springs selected must fit within the space provided [approximately 110-mm (4.3-in.) maximum outside diameter and 300-mm (11.8-in.) maximum overall height] and should be of corrosion-resistant material (for example, stainless steel, cadmium, or zinc-plated steel), should have a spring constant of $35\,000 \pm 7000$ N/m (200 ± 40 lbf/in.) and a load when fully compressed (that is at solid height) of about 4500 N (approximately 1000 lbf). For additional information, refer to Specification A125 for Steel Springs, Helical, Heat Treated.

6.1.5 *Spring,*

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ASTM D3535-07a](#)

<https://standards.iteh.ai/catalog/standards/sist/35e1d6e5-7385-4081-8adf-3800c14002e7/astm-d3535-07a>

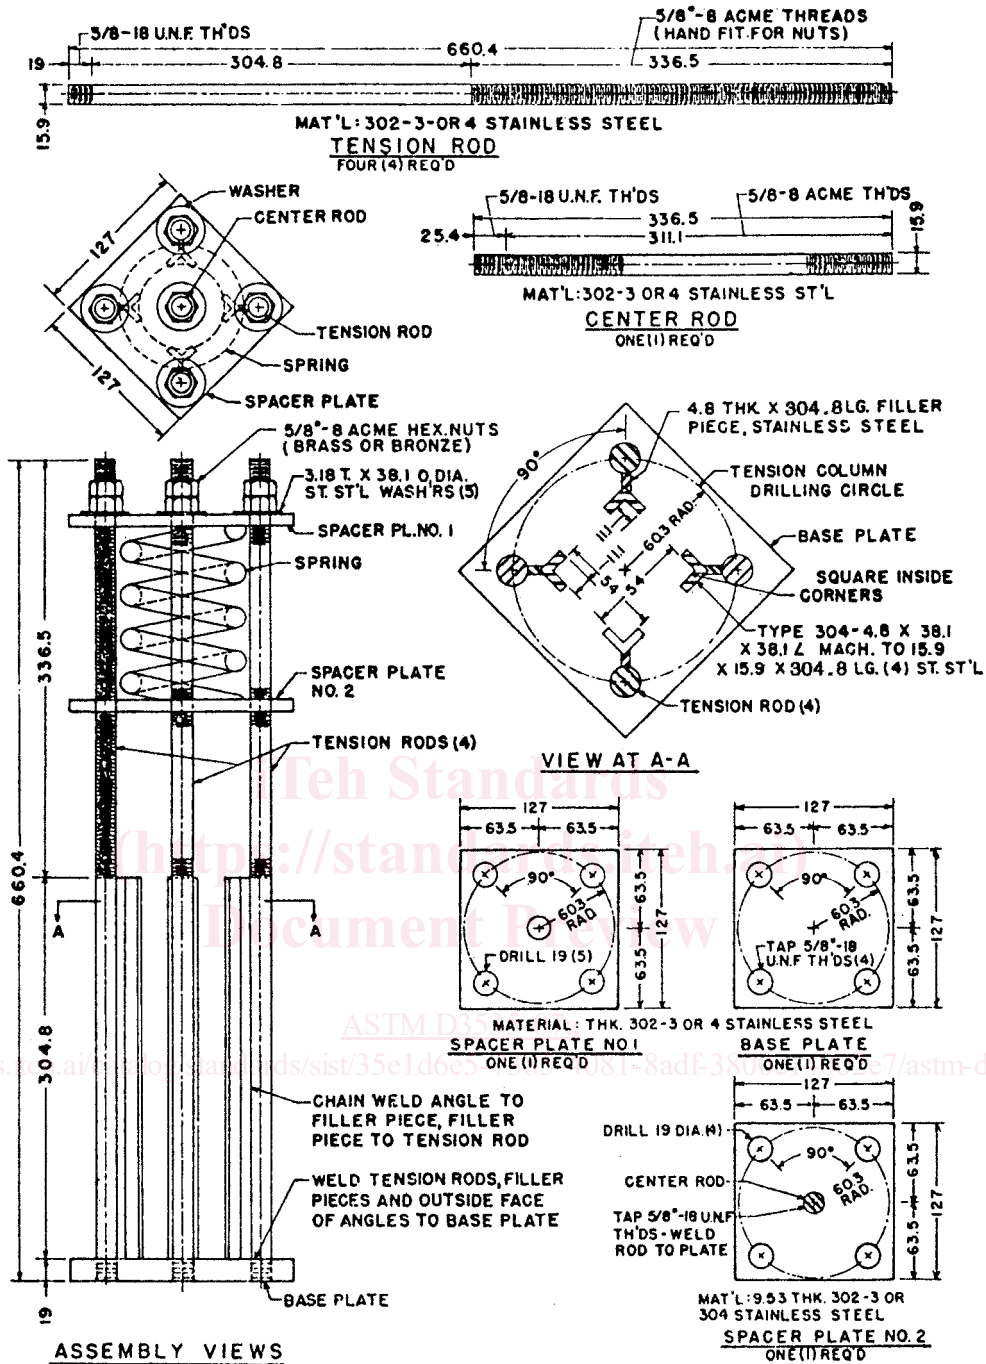

Metric Equivalents

mm	in.	mm	in.
3.18	1/8	127	5
4.77	3/16	139.7	5 1/2
9.53	3/8	148	5 3/4
11.1	7/16	165.1	6 1/2
15.9	5/8	267	10 1/2
19.1	3/4	304.8	12
25.4	1	311.1	12 1/4
38.1	1 1/2	336.5	13 1/4
54.0	2 1/8	415	16 3/8
60.3	2 3/8	660.4	26
63.5	2 1/2		

FIG. 1 Compression-Type Creep Tester³