

---

---

**Ships and marine technology —  
Manoeuvring of ships —**

**Part 1:  
General concepts, quantities and test  
conditions**

**iTeh STANDARD PREVIEW**  
*Navires et technologie maritime — Manoeuvres des navires —  
Partie 1: Notions générales, grandeurs et conditions d'essai*  
**(standards.iteh.ai)**

ISO 13643-1:2013

<https://standards.iteh.ai/catalog/standards/sist/ba918c37-71c9-4a35-8ce9-25ebfeb0c7a9/iso-13643-1-2013>



**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 13643-1:2013

<https://standards.iteh.ai/catalog/standards/sist/ba918c37-71c9-4a35-8ce9-25ebfeb0c7a9/iso-13643-1-2013>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Axis systems</b> .....	<b>2</b>
4.1 General.....	2
4.2 Earth-fixed axis system.....	2
4.3 Ship-fixed axis system.....	2
<b>5 Position coordinates</b> .....	<b>3</b>
<b>6 Angles</b> .....	<b>4</b>
6.1 Angles of flow.....	4
6.2 Angles of flow at parts of the ship.....	4
6.3 Eulerian angles.....	5
<b>7 General quantities</b> .....	<b>7</b>
7.1 Physical quantities.....	7
7.2 Geometrical quantities.....	8
7.3 Mass quantities.....	15
7.4 Velocities and accelerations.....	16
7.5 Forces, moments and their coefficients.....	18
7.6 Control quantities.....	19
7.7 Propulsion.....	20
7.8 Derivatives.....	22
7.9 Dynamic stability.....	24
7.10 External disturbances.....	28
<b>8 General test conditions, documentation</b> .....	<b>28</b>
8.1 General.....	28
8.2 Environment.....	29
8.3 Ship.....	29
8.4 Test reports.....	30
8.5 Model tests.....	30
<b>Annex A (informative) Alphabetical list of symbols</b> .....	<b>32</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. [www.iso.org/directives](http://www.iso.org/directives)

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. [www.iso.org/patents](http://www.iso.org/patents)

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

The committee responsible for this document is ISO/TC 8, *Ships and marine technology*, Subcommittee SC 6, *Navigation and ship operations*.

ISO 13643 consists of the following parts, under the general title *Ships and marine technology — Manoeuvring of ships*:

- Part 1: General concepts, quantities and test conditions
- Part 2: Tuning and yaw checking
- Part 3: Yaw stability and steering
- Part 4: Stopping, acceleration, traversing
- Part 5: Submarine specials
- Part 6: Model test specials

# Ships and marine technology — Manoeuvring of ships —

## Part 1: General concepts, quantities and test conditions

### 1 Scope

This part of ISO 13643 applies to manoeuvring tests with surface ships, submarines, and models.

This part of ISO 13643 defines concepts, symbols, and test conditions constituting general fundamentals which are to be applied for the description and determination of certain ship manoeuvring characteristics together with the respective test-specific physical quantities contained in ISO 13643-2 to ISO 13643-6.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 19019, *Sea-going vessels and marine technology — Instructions for planning, carrying out and reporting sea trials*

ISO 80000-1, *Quantities and units — Part 1: General*

ISO 80000-3, *Quantities and units — Part 3: Space and time*  
<https://standards.iteh.ai/catalog/standards/sis/6a9f8c37-71c9-4a35-8ce9-25ebfeb0c7a9/iso-13643-1-2013>

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

#### 3.1

##### **manoeuvring**

all manoeuvres, manoeuvring tests, and tests or other methods, such as computations, simulations, etc. to establish manoeuvring characteristics

Note 1 to entry: Manoeuvring includes measures to maintain cruising conditions under external disturbances.

#### 3.2

##### **manoeuvre**

ship operation measures to change course and/or speed, and in case of submarines, depth

Note 1 to entry: Special actions taken, e.g. for casting-off, turning aside, or rescuing (person over board), are included.

#### 3.3

##### **manoeuvring test**

test conducted with a full-scale ship, submarine, or a model to determine and evaluate the manoeuvring characteristics under standardized conditions

Note 1 to entry: Manoeuvring tests are often similar to manoeuvres but organized in such a manner that, as far as possible, specific manoeuvring characteristics can be measured individually.

#### 3.4

##### **CC-Code**

computer compatible symbols introduced by the 14th International Towing Tank Conference

### 3.5 manoeuvring device

rudder, azimuthing thruster, hydroplane, cycloidal propeller, or equivalent system used to manoeuvre a vessel

### 3.6 quantities and units

quantities and their units shall be in accordance with ISO 80000-1 and ISO 80000-3

## 4 Axis systems

### 4.1 General

Axis systems are three-dimensional, orthogonal, right-handed systems. Earth-fixed and ship-fixed axis systems are defined in [Table 1](#) and [Table 2](#).

### 4.2 Earth-fixed axis system

**Table 1 — Symbols and their definitions for the earth-fixed axis system**

Symbol	CC-Code	SI-Unit	Term	Position	Positive sense
$O_0$	ORIG0	—	Origin, earth-fixed	Arbitrary, but preferably in the water surface	—
$O$	ORIG	—	Origin, ship-fixed (moving with the ship)	Preferably according to <a href="#">Table 2</a>	—
$x_0$	X0	m	—	In the horizontal plane <sup>a</sup>	Arbitrary
$y_0$	Y0	m	Transverse axis	In the horizontal plane <sup>a</sup>	Right-handed system with $x_0, z_0$
$z_0$	Z0	m	Vertical axis	In the direction of gravity	Down

<sup>a</sup> Assuming earth or water surfaces to be plane.

### 4.3 Ship-fixed axis system

**Table 2 — Symbols and their definitions for the ship-fixed axis system**

Symbol	CC-Code	SI-Unit	Term	Position	Positive sense
$O$	ORIG	—	Origin, ship fixed	For surface ships in CL at the height of DWL at MP For submarines on MA in the lateral plane of $B\nabla$	—
$x$	X	m	Longitudinal axis	In CL or MA	Forward
$y$	Y	m	Lateral axis	Perpendicular to CL	Starboard
$z$	Z	m	Normal axis	In CL	Right-handed system with $x$ and $y$ (under normal cruising conditions down)

## 5 Position coordinates

**Table 3 — Symbols and their definitions for position coordinates of points under consideration**

Symbol	CC-Code	SI-Unit	Concept	
			Term	Definition or explanation
$x$ (..) <sup>a</sup>	$X$ (..) <sup>a</sup>	m	Longitudinal position	Distance between point under consideration and origin O measured parallel to the ship's longitudinal axis (see Table 2), positive if point under consideration is forward of origin O
$y$ (..) <sup>a</sup>	$Y$ (..) <sup>a</sup>	m	Lateral position	Distance between point under consideration and origin O measured parallel to the ship's lateral axis, positive if point under consideration is starboard of origin O
$z$ (..) <sup>a</sup>	$Z$ (..) <sup>a</sup>	m	Normal position	Distance between point under consideration and origin O measured parallel to the ship's normal axis, positive if point under consideration is below origin O
<sup>a</sup> (..) = Supplement to symbol/CC-code by code letters for points under consideration. Code letters for the following special points: A      Antenna (reference point) B      Centre of buoyancy (static) BB     Bow plane (reference point) F      Stabilising fin (reference point) G      Centre of gravity L      Lateral area below waterline (centre of area) LV     Lateral area above waterline (centre of area) P      Propeller (reference point) R      Manoeuvring device (reference point) S      Stern plane (reference point) T      Thruster (reference point) EXAMPLE $z_R$ resp. ZR: Normal position of manoeuvring device (reference point)				

## 6 Angles

### 6.1 Angles of flow

#### 6.1.1 Angle of attack

Table 4 — Symbol and definition for the angle of attack

Symbol	CC-Code	SI-Unit	Concept		Axis of rotation	Measurement plane
			Term	Definition or explanation		
$\alpha$	ALFA	rad <sup>a</sup>	Angle of attack	<p>Angle by which the projection of the direction of heading through the water upon CL has to be turned about lateral axis <math>y</math> such that it coincides with the <math>x</math>-axis</p> $\arctan \frac{w}{u}$ $\arcsin \frac{w}{\sqrt{u^2 + w^2}}$	$y$	$xz$

<sup>a</sup> For angles, the unit ° (degree) may be used.

#### 6.1.2 Drift angle

Table 5 — Symbol and definition for the drift angle

Symbol	CC-Code	SI-Unit	Concept		Axis of rotation	Measurement plane
			Term	Definition or explanation		
$\beta$	BET	rad <sup>a</sup>	Drift angle	<p>Angle to the principal plane of symmetry from the vector of the ship's speed<sup>b</sup> relative to the water, positive in the positive sense of rotation about the <math>z</math>-axis.</p> $\arctan \frac{-v}{u}$ $\arcsin \frac{-v}{\sqrt{u^2 + v^2}}$	$z$	$xy$

<sup>a</sup> For angles, the unit ° (degree) may be used.

<sup>b</sup> Reference point for the path through the water within the ship usually is the origin  $O$  of the ship-fixed axis system according to Table 2.

### 6.2 Angles of flow at parts of the ship

The definition of angles of flow at parts of the ship is to follow the definition of the ship's angles of flow as far as possible. Their symbols are to be derived from those in 6.1.1 and 6.1.2 by means of suitable subscripts (for a selection see Table 3).

#### EXAMPLE

$\alpha_S$  Angle of attack at stern plane

$\beta_R$  Drift angle at manoeuvring device

### 6.3 Eulerian angles

#### 6.3.1 General

Eulerian angles are described in [Figure 1](#) and in [Table 6](#) and [Table 7](#).

#### 6.3.2 Nodal axes


In this subclause, the rotational position of two axis systems relative to one another is described by Eulerian angles which are defined with the aid of nodal axes (see [Table 6](#)).

**Table 6 — Symbols and their definitions for nodal axes**

Symbol	Definition or explanation
$k_1$	Projection of the longitudinal axis $x$ onto the horizontal $x_0y_0$ -plane
$k_2$	Positioned with respect to $y_0$ as $k_1$ to $x_0$
$k_3$	Projection of vertical axis $z_0$ onto $yz$ -plane

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

ISO 13643-1:2013  
<https://standards.iteh.ai/catalog/standards/sist/ba918c37-71c9-4a35-8ce9-25ebfeb0c7a9/iso-13643-1-2013>

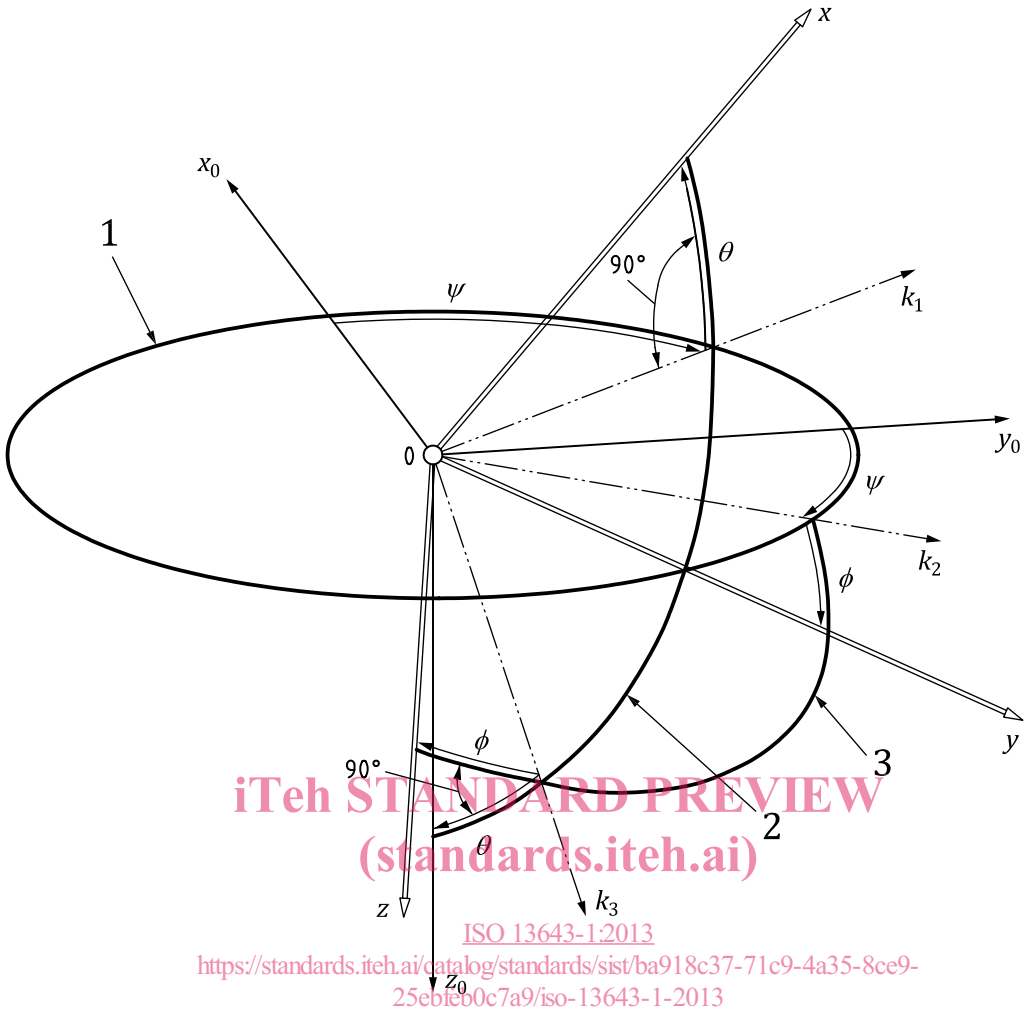

- Key**
- 1  $x_0y_0$  plane
  - 2  $xz_0$  plane
  - 3  $xy$  plane

Figure 1 — Angles between earth-fixed and ship-fixed axis system

6.3.3 Eulerian angles between earth-fixed and ship-fixed axis systems

Table 7 — Symbols and their definitions for angles between earth-fixed and ship-fixed axis systems

Symbol	CC-Code	SI-Unit	Concept		Axis of rotation	Measurement plane
			Term	Definition or explanation		
$\theta_S$	TRIMS	rad <sup>a</sup>	Trim angle	Angle of turn about nodal axis $k_2$ , measured from nodal axis $k_1$ to $x$ -axis (angle between $x$ -axis and horizontal plane); positive if unit vector in the direction of $x$ -axis has a negative component in the direction of $z_0$ -axis	$k_2$	$xz_0$

<sup>a</sup> For angles, the unit ° (degree) may be used.

Table 7 (continued)

Symbol	CC-Code	SI-Unit	Concept		Axis of rotation	Measurement plane
			Term	Definition or explanation		
$\theta$	TETP	rad <sup>a</sup>	Pitch angle	Definition as for $\theta_S$ above; used for oscillatory processes; usually measured relative to mean trim angle	$k_2$	$xz_0$
$\phi_S$	HEELANG	rad <sup>a</sup>	Heel (bank) angle	Angle of turn about the $x$ -axis, measured from nodal axis $k_2$ to $y$ -axis; positive in clockwise direction	$x$	$yz$
$\phi$	PHIR	rad <sup>a</sup>	Roll angle	Definition as for $\phi_S$ above; used for oscillatory processes; usually measured relative to mean heel angle	$x$	$yz$
$\psi$	PSIH	rad <sup>a</sup>	Heading	Angle of turn about vertical axis $z_0$ , measured from $x_0$ -axis to nodal axis $k_1$ ; positive in clockwise direction; usually $x_0$ -direction coincides with north or initial heading	$z_0$	$x_0y_0$
	PSIY	rad <sup>a</sup>	Yaw angle	Definition as above; used for oscillatory processes; usually measured relative to mean heading	$z_0$	$x_0y_0$

<sup>a</sup> For angles, the unit ° (degree) may be used.

## 7 General quantities

ISO 13643-1:2013

### 7.1 Physical quantities

<https://standards.iteh.ai/catalog/standards/sist/ba918c37-71c9-4a35-8ce9-25ebfeb0c7a9/iso-13643-1-2013>

Table 8 — Symbols and their definitions for physical quantities

Symbol <sup>a</sup>	CC-Code <sup>a</sup>	SI-Unit	Concept	
			Term	Definition or explanation
$F_n$	FN	1	Froude number	$\frac{V}{\sqrt{gL}}$
$F_{nh}$	FH	1	Froude depth number	$\frac{V}{\sqrt{gh}}$
$F_{nV}$	FV	1	Froude displacement number	$\frac{V}{\sqrt{gV}^{1/3}}$
$g$	G	m s <sup>-2</sup>	Acceleration due to gravity	—
$h$	DE	m	Water depth	—
$h_m$	DEME	m	Mean water depth	During the test
$m$	MA	kg	Ship's mass	Mass which must be accelerated for speed changes, but without added mass
$n$	N	s <sup>-1</sup>	Rate of revolution, general	—
$P$	P	W	Power, general	—

Table 8 (continued)

Symbol <sup>a</sup>	CC-Code <sup>a</sup>	SI-Unit	Concept	
			Term	Definition or explanation
$R_n$	RN	1	Reynolds number	$\frac{VL}{\nu}$
$s$	SP	m	Track length	Measured along ship's track
$t$	TI	s	Time, general	—
$t^\circ_A$	TEAI	°C	Air temperature	—
$t^\circ_W$	TEWA	°C	Water temperature	—
$V$	V	m s <sup>-1</sup> <sup>b</sup>	Ship's speed	Speed through the water; usually given for origin O
$W$	WT	N	Ship's weight	—
$\Delta$	DISPM	kg	Displacement mass	$\rho \nabla$
$\Delta_F$	DISPF	N	Displacement force	$\rho g \nabla$
$N$	VK	m <sup>2</sup> s <sup>-1</sup>	Kinematic viscosity	—
$P$	RHOWA	kg m <sup>-3</sup>	Water density	—
$\rho_A$	RHOAI	kg m <sup>-3</sup>	Air density	—
$\Omega$	OMN	rad s <sup>-1</sup>	Angular velocity	—
<sup>a</sup> Symbol and CC-Code can have the additional subscripts S (for ship) or M (for model) if necessary for distinction.				
<sup>b</sup> The unit kn, common in the navigation, may be used.				

## 7.2 Geometrical quantities

### 7.2.1 Symbols for manoeuvring

Table 9 — Symbols and their definitions for geometrical quantities

Symbol	CC-Code	SI-Unit	Concept	
			Term	Definition or explanation
$A_C$	AC	m <sup>2</sup>	Canal cross section	Cross section area of the canal
$A_L$	AL	m <sup>2</sup>	Lateral area below waterline	Moulded lateral area up to DWL, not including manoeuvring devices, fixed and movable parts of propulsors
$A_{LV}$	ALV	m <sup>2</sup>	Lateral area above waterline	Lateral area of the ship above DWL, generally without rigging, railings etc.
$A_M$	AM	m <sup>2</sup>	Midship section area	Sectional area of moulded hull parallel to yz-plane at MP between BL and DWL

Table 9 (continued)

Symbol	CC-Code	SI-Unit	Concept	
			Term	Definition or explanation
AP	AP	—	After perpendicular	For surface ships: Straight line on CL perpendicular to DWL through its intersection with the moulded stern contour (common practice for naval ships) or through the centreline of manoeuvring device stock (common practice for merchant ships)  For submarines with one shaft: Straight line perpendicular to MA through the intersection of the aft edge of stern tube with the centreline of the shaft. For submarines with several shafts, AP has to be determined adequately
$A_R$	ARU	m <sup>2</sup>	Rudder area	For the movable part (incl. flap); in way of a fixed post, aft of the stock axis only
$A_{RF}$	ARF	m <sup>2</sup>	Flap area	For the flap movable relative to the rudder, aft of its hinge axis only
$A_{RP}$	ARP	m <sup>2</sup>	Rudder area in the propeller race	For rudder in neutral position
$A_{RT}$	ART	m <sup>2</sup>	Total rudder area	$A_R + A_{RX}$
$A_{RX}$	ARX	m <sup>2</sup>	Fixed post area of a rudder	Forward of the stock axis
$A_{SK}$	ASK	m <sup>2</sup>	Skeg area	For skeg or fixed fin
$A_X$	AX	m <sup>2</sup>	Maximum transverse section area	Maximum sectional area of moulded hull parallel to the yz-plane up to the DWL
$B$	B	m	Breadth	Reference breadth of a ship; usually $B_{DWL}$
$B_{DWL}$	BDWL	m	Breadth of design waterline	Maximum moulded breadth of design waterline
BL	BL	—	Baseline	Line on CL parallel to DWL through the moulded keel line at MP
$B_{\nabla}$	—	—	Centre of buoyancy of form displacement	Relative to $\nabla$
$b$	SP	m	Rudder span, general	Distance between planes perpendicular to the stock axis through the extremities of the rudder
$b_R$	SPRU	m	Rudder span	Distance between planes perpendicular to the stock axis through the extremities of the movable part (incl. flap); in way of a fixed post, aft of the stock axis only
$b_{RF}$	SPRUF	m	Flap span for a rudder	Distance between planes perpendicular to its hinge axis through the extremities of the flap, aft of its hinge axis only
$b_{RT}$	SPRUT	m	Total rudder span	Distance between planes perpendicular to the stock axis through the extremities of the total rudder incl. flap and fixed post