
**Ships and marine technology — Ship's
mooring and towing fittings — Shiplside
roller fairleads**

*Navires et technologie maritime — Corps-morts et ferrures de
remorquage de navires — Chaumards à rouleaux à quai*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 13767:2012

<https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012>



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 13767:2012

<https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Classification	1
4.1 Type	1
4.2 Nominal sizes	1
5 Dimensions	1
6 Materials	2
7 Manufacturing and inspection	2
8 Marking	2
Annex A (informative) Basis for strength assessment of shiplide roller fairleads	6
Bibliography	8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 13767:2012](https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012)

<https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 13767 was prepared by Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 4, *Outfitting and deck machinery*.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 13767:2012](https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012)

<https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012>

Introduction

The shipside roller fairlead is a type of ship's mooring fitting installed on board to lead the mooring rope from the ship's inboard to outboard.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 13767:2012](https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012)

<https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 13767:2012

<https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012>

Ships and marine technology — Ship's mooring and towing fittings — Shiplside roller fairleads

1 Scope

This International Standard specifies the design, size and technical requirements for shiplside roller fairleads installed to lead the mooring rope of a ship.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 13755, *Ships and marine technology — Ship's mooring and towing fittings — Steel rollers*

IMO Circular MSC/Circ.1175, *Guidance on shipboard towing and mooring equipment*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

safe working load

SWL

maximum load in kN on the rope that should normally be applied in service conditions

4 Classification

4.1 Type

Depending on the construction, roller fairleads shall be classified as the following two types:

- 2-roller type;
- 3-roller type.

4.2 Nominal sizes

The nominal sizes, D_n , of roller fairleads are denoted by reference to the outside diameter of the roller, in millimetres, from a basic series of preferred numbers.

The nominal sizes are: 150, 200, 250, 300, 350, 400, 450 and 500.

5 Dimensions

Roller fairleads have dimensions and particulars in accordance with Tables 1 and 2, and Figures 1 and 2.

6 Materials

The following material shall be used for manufacturing the roller fairleads:

- Seat: weldable steel plates having a yield point of not less than 235 N/mm².

7 Manufacturing and inspection

- 7.1 All surfaces of the roller fairleads, including welding, shall be free from any visible flaws or imperfections.
- 7.2 All surfaces in contact with the ropes shall be free from surface roughness or irregularities likely to cause damage to the ropes by abrasion.
- 7.3 The roller fairleads shall be coated externally with an anti-corrosion protective finish.

8 Marking


8.1 The safe working load (SWL) intended for the use of the roller fairleads shall be noted in the towing and mooring plan available on board for the guidance of the shipmaster as specified in MSC/Circ.1175.

8.2 The actual SWL on board shall be determined by considering the under deck reinforcement, and it shall be marked on the towing and mooring plan. The actual SWL shall not be over the SWL indicated in this International Standard.


8.3 The shipside roller fairleads shall be clearly marked with its SWL by weld bead or equivalent. The SWL shall be expressed in tonnes (letter 't') and be placed so that it is not obscured during operation of the fitting.

EXAMPLE SWL XXX t <https://standards.iteh.ai/catalog/standards/sist/9746ffbf-4c6d-496b-b8b1-1f13697a2ac1/iso-13767-2012>

Dimensions in millimetres

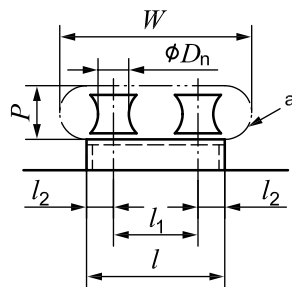

a) 2-roller type

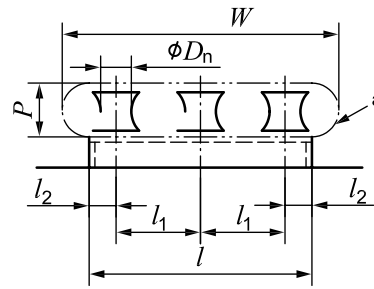

b) 3-roller type

a Opening on shell/bulwark.

Figure 1 — Layout of roller fairleads

Table 1 — Dimensions and SWL of roller fairleads

Dimensions in millimetres

Nominal size D_n	2-roller type		3-roller type		l_1	l_2	P^c	SWL ^b			
	l	W^c	l	W				$\theta = 90^\circ$ ^a		$\theta = 20^\circ$	
								(kN)	(t)	(kN)	(t)
150	570	770	870	1 070	300	135	200	260	26	186	19
200	740	990	1 140	1 390	400	170	250	437	45	314	32
250	910	1 210	1 410	1 710	500	205	300	574	58	412	42
300	1 070	1 420	1 670	2 020	600	235	350	710	72	510	52
350	1 230	1 610	1 930	2 310	700	265	380	1 025	104	736	75
400	1 400	1 780	2 200	2 580	800	300	380	1 230	125	883	90
450	1 560	1 940	2 460	2 840	900	330	380	1 571	160	1 128	115
500	1 720	2 100	2 720	3 100	1 000	360	380	1 913	195	1 373	140

^a θ is the relative angle of ropes on the roller fairlead (refer to Annex A).

^b The SWL is the maximum applicable rope tension based on 90° ($\theta = 90^\circ$) and 160° ($\theta = 20^\circ$) deflection of rope direction by the roller fairlead.

The SWLs shown in this table are for reference only. These are based on the loadings as mentioned in Annex A.

The "SWL" may be adjusted depending on the actual loading conditions, and the actual marking shall be agreed between the user and the manufacturer.

^c P and W are for reference only. The opening size on the shell or bulwark shall be determined considering overhauling space of the roller.