

ü]fc_cdUgcj bc`X][]HJbc`ca fYy`Y`n`]bhY[f]fUbj]a]`g]cf]hj Ua]`f6 !=G8 BŁ!`Dfchc_c`
X][]HJbY`bUfc b]y`Y`g][bU]nUWY`Y`y`h`&`f8 GG&Ł!`GdYWZ]_UWY`UnU6 !=G8 B
i dcfUVb]y`c]ca fYyb]j]a Ygb]_`g`c`U` `nU_fa]`Yb`Y`_]WU#bcg]WU`hc _U]j Y `hc _!`("
XY.`5 Vg]fU`_Hb]`dfYg_i y`Ub]`b]n`f8 HGL]b`XY`bUXcXU`bU]bZ`fa UWY`UnUdfYg_i y`Ub`Y`
]nj YXVY`dfchc_c`U`fD`L`HŁ!`GdYWZ]_UWY`UnU`i dcfUVb]_U

Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; B-ISDN user-network interface layer 3 specification for point-to-multipoint call/bearer control; Part 4. Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user

[SIST ETS 300 771-4:1999](https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999)

<https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999>

Ta slovenski standard je istoveten z: ETS 300 771-4 Edition 1

ICS:

33.080	Digitalno omrežje z integriranimi storitvami (ISDN)	Integrated Services Digital Network (ISDN)
--------	---	--

SIST ETS 300 771-4:1999 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 771-4:1999](#)

<https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999>



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 771-4

September 1998

Source: SPS

Reference: DE/SPS-05085-4

ICS: 33.020

Key words: B-ISDN, DSS2, UNI, layer 3, basic, testing, ATS, PIXIT, user

**Broadband Integrated Services Digital Network (B-ISDN);
Digital Subscriber Signalling System No. two (DSS2) protocol;
B-ISDN user-network interface layer 3
specification for the point-to-multipoint call/bearer control;
Part 4: Abstract Test Suite (ATS) and partial Protocol
Implementation eXtra Information for Testing (PIXIT) proforma
specification for the user**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

Internet: secretariat@etsi.fr - <http://www.etsi.fr> - <http://www.etsi.org>

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 771-4:1999](https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999)

<https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999>

Contents

Foreword	5
1 Scope	7
2 Normative references	7
3 Definitions and abbreviations	8
3.1 Definitions	8
3.2 Abbreviations	8
4 Abstract Test Method (ATM)	8
5 Untestable test purposes	9
6 ATS to TP map	9
7 PCTR conformance	9
8 PIXIT conformance	9
9 ATS Conformance	10
Annex A (normative): Protocol Conformance Test Report (PCTR) proforma	11
A.1 Identification summary	11
A.1.1 Protocol conformance test report	11
A.1.2 IUT identification	11
A.1.3 Testing environment	11
A.1.4 Limits and reservations	12
A.1.5 Comments	12
A.2 IUT Conformance status	12
A.3 Static conformance summary	12
A.4 Dynamic conformance summary	13
A.5 Static conformance review report	13
A.6 Test campaign report	14
A.7 Observations	27
Annex B (normative): Partial PIXIT proforma	28
B.1 Identification summary	28
B.2 Abstract test suite summary	29
B.3 Test laboratory	29
B.4 Client (of the Test Laboratory)	29
B.5 SUT	30
B.6 Protocol information	30

B.6.1	Protocol identification	30
B.6.2	Configuration to be tested	31
B.6.3	Stimuli for the IUT	31
B.6.4	Test management timers	31
B.6.5	Parameter Values	32
Annex C (normative):	Abstract Test Suite (ATS)	33
C.1	The TTCN Graphical form (TTCN.GR)	33
C.2	The TTCN Machine Processable form (TTCN.MP)	33
Annex D (informative):	Bibliography	34
History		35

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 771-4:1999](https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999)

<https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Signalling Protocols and Switching (SPS) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS is part 4 of a multi-part standard covering the Digital Subscriber Signalling System No. two (DSS2) protocol specification for the Broadband Integrated Services Digital Network (B-ISDN); User-network layer 3 specification for point-to-multipoint call/bearer control; as described below:

- Part 1: "Protocol specification [ITU-T Recommendation Q.2971 (1995), modified]";
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation Extra Information for Testing (PIXIT) proforma specification for the user".**
- Part 5: "Test Suite Structure and Test Purposes (TSS&TP) specification for the network";
- Part 6: "Abstract Test Suite (ATS) and partial Protocol Implementation Extra Information for Testing (PIXIT) proforma specification for the network".

Transposition dates	
Date of adoption of this ETS:	18 September 1998
Date of latest announcement of this ETS (doa):	31 December 1998
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	30 June 1999
Date of withdrawal of any conflicting National Standard (dow):	30 June 1999

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 771-4:1999](https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999)

<https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999>

1 Scope

This fourth part of ETS 300 771 specifies the user Abstract Test Suite (ATS) for the T_B reference point or coincident S_B and T_B reference point (as defined in ITU-T Recommendation I.413 [10]) of implementations conforming to the standards for the signalling user-network layer 3 specification for point-to-multipoint call/connection control of the Digital Subscriber Signalling System No. two (DSS2) protocol for the pan-European Broadband Integrated Services Digital Network (B-ISDN), ETS 300 771-1 [1].

A further part of the present document specifies the Test Suite Structure and Test Purposes (TSS&TP) related to this ATS and partial PIXIT proforma. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the Network side of the T_B reference point or coincident S_B and T_B reference point of implementations conforming to ETS 300 771-1 [1].

2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 771-1 (1995): "Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; B-ISDN user-network interface layer 3 specification for point-to-multipoint call/bearer control; Part 1: Protocol specification [ITU-T Recommendation Q.2971 (1995), modified]".
- [2] Void.
- [3] ETS 300 771-3 (1997): "Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; B-ISDN user-network interface layer 3 specification for point-to-multipoint call/bearer control; Part 3: Test Suite Structure and Test Purposes (TSS&TP) specification for the user".
- [4] ETS 300 443-1 (1996): "Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; B-ISDN user-network interface layer 3 specification for basic call/bearer control; Part 1: Protocol specification [ITU-T Recommendation Q.2931 (1995), modified]".
- [5] ISO/IEC 9646-1 (1994): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".
- [6] ISO/IEC 9646-2 (1994): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 2: Abstract Test Suite specification".
- [7] ISO/IEC 9646-3 (1992): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 3: The Tree and Tabular Combined Notation (TTCN)".
- [8] ISO/IEC 9646-4 (1996): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 4: Test realization".
- [9] ISO/IEC 9646-5 (1996): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 5: Requirements on test laboratories and clients for the conformance assessment process".

- [10] ITU-T Recommendation I.413 (1993): "B-ISDN user-network interface".
- [11] ETS 300 443-2 (1996): "Broadband Integrated Services Digital Network (B-ISDN); Digital Subscriber Signalling System No. two (DSS2) protocol; B-ISDN user-network interface layer 3 specification for basic call/bearer control; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of this ETS, the following definitions apply:

Implementation Under Test (IUT): See ISO/IEC 9646-1 [5].

System Under Test (SUT): See ISO/IEC 9646-1 [5].

Abstract Test Suite (ATS): See ISO/IEC 9646-1 [5].

Protocol Implementation Conformance Statement (PICS): See ISO/IEC 9646-17 [5].

PICS proforma: See ISO/IEC 9646-1 [5].

Protocol Implementation eXtra Information for Testing (PIXIT): See ISO/IEC 9646-1 [5].

PIXIT proforma: See ISO/IEC 9646-1 [5].

Lower Tester (LT): See ISO/IEC 9646-1 [5].

Upper Tester (UT): See ISO/IEC 9646-1 [5].

Point of Control and Observation (PCO): See ISO/IEC 9646-1 [5].

3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

ATM	Abstract Test Method
ATS	Abstract Test Suite
ExTS	Executable Test Suite
IUT	Implementation Under Test
LT	Lower Tester
MOT	Means Of Testing
PCO	Point of Control and Observation
PCTR	Protocol Conformance Test Report
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
SUT	System Under Test
TCP	Test Co-ordination Procedures
TP	Test Purpose
TTCN	Tree and Tabular Combined Notation
UT	Upper Tester

4 Abstract Test Method (ATM)

The remote test method is applied for the user ATS. The Point of Control and Observation (PCO) resides at the service access point between layers 2 and 3. This PCO is named "L0" (for Lower). The L0 PCO is used to control and observe the behaviour of the Implementation Under Test (IUT) and test case verdicts are assigned depending on the behaviour observed at this PCO.

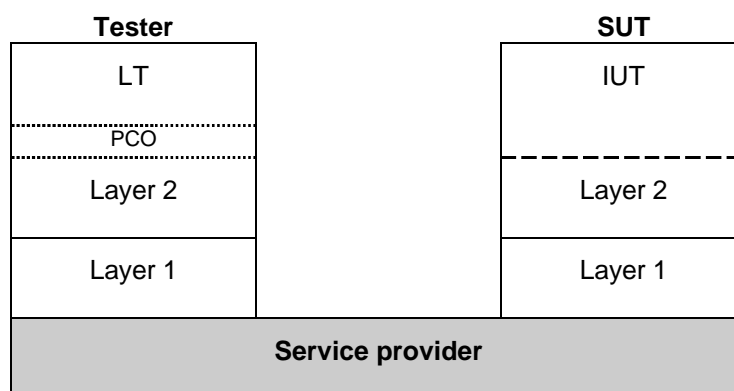


Figure 1: Remote test method

ISO/IEC 9646-2 [6] allows the informal expression of Test Co-ordination Procedures (TCP) between the SUT upper layer(s) and the LT. In the ATS contained in annex C, TCP is achieved by use of a second "informal" PCO, called "O" (for Operator). This PCO is used to specify control but not observation above the IUT and consequently, events at this PCO are never used to generate test case verdicts. The use of this O PCO is regarded as a preferred alternative to the use of the implicit send event, in that it allows the ATS to specify in a clear and meaningful way what actions are required to be performed on the IUT.

5 Untestable test purposes

There are no untestable test purposes associated with this ATS.

6 ATS to TP map

The identifiers used for the Test Purposes (TPs) are reused as test case names. Thus there is a straightforward one-to-one mapping.

7 PCTR conformance

[SIST ETS 300 771-4:1999](https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999)

[https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-](https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999)

[4d66e545d004/sist-ets-300-771-4-1999](https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999)

A test laboratory, when requested by a client to produce a PCTR, is required, as specified in ISO/IEC 9646-5 [9], to produce a PCTR conformant with the PCTR template given in annex B of ISO/IEC 9646-5 [9].

Furthermore, a test laboratory, offering testing for the ATS specification contained in annex C, when requested by a client to produce a PCTR, is required to produce a PCTR conformant with the PCTR proforma contained in annex A of this ETS.

A PCTR which conforms to this PCTR proforma specification shall preserve the content and ordering of the clauses contained in annex A. Clause A.6 of the PCTR may contain additional columns. If included, these shall be placed to the right of the existing columns. Text in italics may be retained by the test laboratory.

8 PIXIT conformance

A test realizer, producing an executable test suite for the Abstract Test Suite (ATS) specification contained in annex C, is required, as specified in ISO/IEC 9646-4 [8], to produce an augmented partial PIXIT proforma conformant with this partial PIXIT proforma specification.

An augmented partial PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The augmented partial PIXIT proforma may contain additional questions that need to be answered in order to prepare the Means Of Testing (MOT) for a particular IUT.

A test laboratory, offering testing for the ATS specification contained in annex C, is required, as specified in ISO/IEC 9646-5 [9], to further augment the augmented partial PIXIT proforma to produce a PIXIT proforma conformant with this partial PIXIT proforma specification.

A PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The PIXIT proforma may contain additional questions that need to be answered in order to prepare the test laboratory for a particular IUT.

9 ATS Conformance

The test realizer, producing a MOT and Executable Test Suite (ExTS) for this Abstract Test Suite (ATS) specification, shall comply with the requirements of ISO/IEC 9646-4 [8]. In particular, these concern the realization of an ExTS based on each ATS. The test realizer shall provide a statement of conformance of the MOT to this ATS specification.

An ExTS which conforms to this ATS specification shall contain test groups and test cases which are technically equivalent to those contained in the ATS in annex C. All sequences of test events comprising an abstract test case shall be capable of being realized in the executable test case. Any further checking which the test system might be capable of performing is outside the scope of this ATS specification and shall not contribute to the verdict assignment for each test case.

Test laboratories running conformance test services using this ATS shall comply with ISO/IEC 9646-5 [9].

A test laboratory which claims to conform to this ATS specification shall use an MOT which conforms to this ATS.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 771-4:1999](https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999)

<https://standards.iteh.ai/catalog/standards/sist/1100fc4f-5cd3-4487-8e97-4d66e545d004/sist-ets-300-771-4-1999>