



Network Functions Virtualisation (NFV) Release 2; Management and Orchestration; Functional requirements specification

ITeH STAN-AR-010-2018-08
(standard id: 2018-08)
Full standard: https://standards.iteh.ai/catalog/standards/sist/1a1610fc-8caf-4401-a299-f11ec62d5fab/etsi-gs-nfv-ifa-010-v2-5-1-2018-08

Disclaimer

The present document has been produced and approved by the Network Functions Virtualisation (NFV) ETSI Industry Specification Group (ISG) and represents the views of those members who participated in this ISG. It does not necessarily represent the views of the entire ETSI membership.

ReferenceRGS/NFV-IFA010ed251

Keywordsfunctional, management, MANO, NFV,
orchestration, requirements, virtualisation

ETSI650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	6
Foreword.....	6
Modal verbs terminology.....	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	7
3 Definitions and abbreviations.....	8
3.1 Definitions.....	8
3.2 Abbreviations	8
4 General Description.....	9
4.1 Introduction	9
4.2 Overview	9
5 General functional requirements	10
5.1 General functional requirements for virtualised resource management	10
5.2 General functional requirements for multi-tenancy.....	11
6 Functional requirements for NFVO	13
6.1 Functional requirements for virtualised resource management.....	13
6.1.1 Functional requirements for general virtualised resource management.....	13
6.1.2 Functional requirements for VNF-related resource management in indirect mode	13
6.1.3 Functional requirements for VNF-related resource management in direct mode	13
6.1.4 Functional requirements for NS-related resource management performed by the NFVO.....	14
6.1.5 Functional requirements for resource reservation management.....	14
6.1.6 Functional requirements for virtualised resource capacity management	15
6.1.7 Functional requirements for virtualised resource performance management	15
6.1.8 Functional requirements for virtualised resource fault management	16
6.1.9 Functional requirements for virtualised resource information management.....	16
6.1.10 Functional requirements for Network Forwarding Path (NFP) management	16
6.1.11 Functional requirements for quota management.....	17
6.1.12 Functional requirements related to permitted allowance management	17
6.2 Functional requirements for VNF lifecycle management.....	18
6.2.1 Functional requirements for VNF lifecycle management	18
6.2.2 Functional requirements for VNF instantiation	18
6.2.3 Functional requirements for VNF scaling.....	18
6.2.4 Functional requirements for VNF termination.....	19
6.3 Functional requirements for NS lifecycle management	19
6.3.1 Functional requirements for NS lifecycle management.....	19
6.3.2 Functional requirements for NS instantiation	19
6.3.3 Functional requirements for NS scaling.....	20
6.3.4 Functional requirements for NS updating	20
6.3.5 Functional requirements for NS termination.....	20
6.4 Functional requirements for VNF configuration management.....	21
6.5 Functional requirements for VNF information management.....	21
6.5.1 Functional requirements for VNF Package management	21
6.5.2 Functional requirements for VNF instance information management	21
6.6 Functional requirements for NS information management	22
6.6.1 Functional requirements for NSD management.....	22
6.6.2 Functional requirements for NS instance information management.....	22
6.6.3 Functional requirements for PNF Descriptor (PNFD) management.....	22
6.7 Functional requirements for NS performance management	22
6.8 Functional requirements for VNF fault management	23
6.8.1 Functional requirements for virtualisation-related fault management	23
6.9 Functional requirements for NS fault management.....	23

6.10	Functional requirements for infrastructure resource management	23
6.11	Functional requirements for security consideration	23
6.12	Functional requirements for software image management	24
6.13	Functional requirements for NFV acceleration management	24
6.14	Functional requirements for multi-tenancy	25
7	Functional requirements for VNFM	25
7.1	Functional requirements for virtualised resource management	25
7.1.1	Functional requirements for virtualised resource management	25
7.1.2	Functional requirements for VNF-related resource management in indirect mode	26
7.1.3	Functional requirements for VNF-related resource management in direct mode	26
7.1.4	Functional requirements for resource reservation management	27
7.1.5	Functional requirements for virtualised resource performance management	27
7.1.6	Functional requirements for virtualised resource fault management	27
7.1.7	Functional requirements for virtualised resource information management	27
7.1.8	Functional requirements for quota management	28
7.1.9	Functional requirements related to permitted allowance management	28
7.2	Functional requirements for VNF lifecycle management	28
7.2.1	Functional requirements for VNF lifecycle management	28
7.2.2	Functional requirements for VNF instantiation	29
7.2.3	Functional requirements for VNF scaling	29
7.2.4	Functional requirements for VNF termination	30
7.3	Functional requirements for VNF configuration management	30
7.4	Functional requirements for VNF information management	30
7.4.1	Functional requirements for VNF Package management	30
7.4.2	Functional requirements for VNF instance information management	31
7.5	Functional requirements for VNF performance management	31
7.6	Functional requirements for VNF fault management	31
7.6.1	Functional requirements for virtualised resource-related VNF fault management	31
7.6.2	Functional requirements for virtualisation-related fault management	32
7.7	Functional requirements for security consideration	32
7.8	Functional requirements for software image management	32
7.9	Functional requirements for NFV acceleration management	32
7.10	Functional requirements for multi-tenancy	33
7.11	Functional requirements for VNF indicator management	33
8	Functional requirements for VIM	33
8.1	General considerations	33
8.2	Functional requirements for virtualised resource management	34
8.2.1	Functional requirements for virtualised resource management	34
8.2.2	Functional requirements for resource reservation management	34
8.2.3	Functional requirements for virtualised resource capacity management	35
8.2.4	Functional requirements for virtualised resource performance management	35
8.2.5	Functional requirements for virtualised resource fault management	35
8.2.6	Functional requirements for virtualised resource information management	36
8.2.7	Functional requirements for virtualised resource configuration management	36
8.2.8	Functional requirements for NFP management	36
8.2.9	Functional requirements for quota management	37
8.3	Functional requirements for infrastructure resource management	37
8.3.1	Functional requirements for infrastructure resource performance management	37
8.3.2	Functional requirements for infrastructure resource fault management	37
8.4	Functional requirements for security consideration	38
8.5	Functional requirements for software image management	38
8.6	Functional requirements for NFV acceleration management	38
8.7	Functional requirements for multi-tenancy	39
9	Architectural level Requirements	39
9.1	General guidelines for NFV management and orchestration interface design	39
9.2	General requirements to NFV management and orchestration interface design	40
9.3	General requirements for NFV management and orchestration services	40
9.4	General requirements for multi-tenancy	40
Annex A (informative):	Resource management additional information	41

A.1	Quota based resource management	41
A.1.1	Overview	41
A.1.2	Summary of key aspects	41
A.1.3	Allocation of consumer identifiers	42
A.1.4	Setting of quotas	42
A.1.5	NFVO awareness of NFVI resource consumption	42
A.1.6	NFVI resource acquisition	42
A.1.7	Resource contention mitigation	43
A.1.8	Data centre resource utilization efficiency	43
A.1.9	Resource management evolution and interoperability	43
A.1.10	Co-existence of resource quota enforcement and resource management with reservation	43
A.2	Management of resource reservations	43
A.2.1	Introduction	43
A.2.2	Use cases	43
A.2.2.1	Use case for securing resources for several tenants	43
A.2.2.2	Use case for securing resources with detailed capabilities	44
A.2.2.3	Use case for securing resources during NS instantiation	44
A.2.2.4	Use case for securing resources during NS scaling	44
A.2.2.5	Use case for securing resources related to a scheduled event	44
A.2.3	Summary of key aspects	44
A.2.4	Resource reservation management by NFVO	45
A.2.5	Resource reservation handling by the VNFM	46
A.2.6	Resource reservation contention mitigation	46
A.2.7	Co-existence of reservation with quota	46
A.2.8	Resource reservation types	46
A.3	Management of permitted allowance	47
A.3.1	Introduction	47
A.3.2	Summary of key aspects	47
A.3.3	Setting of permitted allowance	47
A.3.4	Permitted allowance management by NFVO	48
A.3.5	Permitted allowance awareness by the VNFM	48
A.3.6	Permitted allowance contention mitigation	48
A.3.7	Co-existence of permitted allowance and resource quota enforcement	48
A.3.8	Co-existence of permitted allowance and resource management with reservation	48
Annex B (informative):	Virtualised resources capacity management	49
B.1	Introduction	49
B.2	Virtualised resources capacity information management by the VIM	49
B.2.1	Functionality	49
B.3	Virtualised resources capacity management by the NFVO	49
B.3.1	Functionality	49
Annex C (informative):	VNF management	51
C.1	Introduction	51
C.2	Use cases	51
C.2.1	Use case for stopping a VNF instance	51
C.2.1.1	Introduction	51
C.2.1.2	Steps	51
C.2.2	Use case for starting a VNF instance	52
C.2.2.1	Introduction	52
C.2.2.2	Steps	52
Annex D (informative):	Authors & contributors	53
History	55

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Group Specification (GS) has been produced by ETSI Industry Specification Group (ISG) Network Functions Virtualisation (NFV).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document specifies functional requirements for NFV management and orchestration, and general guidelines and requirements for NFV management and orchestration interface design.

The scope of the present document does not cover the functional requirements on interfaces.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI GS NFV-IFA 011: "Network Functions Virtualisation (NFV); Management and Orchestration; VNF Packaging Specification".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI GS NFV 002: "Network Functions Virtualisation (NFV); Architectural Framework".
- [i.2] ETSI GS NFV 003: "Network Functions Virtualisation (NFV); Terminology for main concepts in NFV".
- [i.3] ETSI GS NFV 004: "Network Functions Virtualisation (NFV); Virtualisation Requirements".
- [i.4] ETSI GS NFV-MAN 001: "Network Functions Virtualisation (NFV); Management and Orchestration".
- [i.5] ETSI GS NFV-SWA 001: "Network Functions Virtualisation (NFV); Virtual Network Functions Architecture".
- [i.6] ETSI GS NFV-REL 001: "Network Functions Virtualisation (NFV); Resiliency requirements".
- [i.7] ETSI GS NFV-INF 001: "Network Functions Virtualisation (NFV); Infrastructure Overview".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ETSI GS NFV 003 [i.2] and the following apply:

NOTE: A term defined in the present document takes precedence over the definition of the same term, if any, in ETSI GS NFV 003 [i.2].

composite network service: network service containing at least one network service

NS healing: procedure that includes all virtualisation related corrective actions to repair a faulty Network Service (NS) instance including components/functionalities which make up the instance, and have been associated with this fault situation

NOTE 1: In a virtualised environment network service healing focuses only on the virtualised components/functionalities. In case of a NS consisting of virtualised and non-virtualised parts a procedure able to handle both parts is needed. This will be done in connection with components/functionalities that are located outside the virtualised environment.

NOTE 2: "Virtualisation related corrective actions" refers to action(s) toward virtualised resource(s) and associated NS instance.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI GS NFV 003 [i.2] and the following apply:

BSS	Business Support System
CP	Connection Point
DF	Deployment Flavour
EM	(Network) Element Manager
FB	Functional Block
FPGA	Field Programmable Gate Array
IP	Internet Protocol
LCM	LifeCycle Management
NFP	Network Forwarding Path
NSD	Network Service Descriptor
NUMA	Non Uniform Memory Access
OS	Operating System
OSS	Operation Support System
PCIe	Peripheral Component Interface express
PM	Performance Management
PNFD	Physical Network Function Descriptor
SAP	Service Access Point
URI	Uniform Resource Identifier
VL	Virtual Link
WIM	WAN Infrastructure Manager

4 General Description

4.1 Introduction

Network Functions Virtualisation (NFV) adds new capabilities to communications networks and requires a new set of management and orchestration functions to be added to the current model of operations, administration, maintenance and provisioning. The NFV Management and Orchestration (NFV-MANO) architectural framework has the role to manage the infrastructure and orchestrate the resources needed by the Network Services (NSs) and Virtualised Network Functions (VNFs).

In order to guide the development of the specification of the interfaces exposed between the NFV-MANO Functional Blocks (FBs), it is important to have a clear and consolidated set of functional requirements to be addressed by the NFV-MANO. The present document is providing functional requirements on NFV MANO e.g. VNF lifecycle management (LCM), NS LCM, virtualised resource management, etc.

The functional requirements specified in the present document are mainly derived from functional requirements identified in ETSI GS NFV 002 [i.1], ETSI GS NFV 003 [i.2], ETSI GS NFV 004 [i.3], ETSI GS NFV-MAN 001 [i.4], ETSI GS NFV-SWA 001 [i.5], ETSI GS NFV-REL 001 [i.6] and ETSI GS NFV-INF 001 [i.7] or derived from concepts defined in these documents.

4.2 Overview

In order to provide systematic functional requirements, this document arranges the functional requirements by categorizing the requirements according to key operational functions of NFV-MANO, which are documented in ETSI GS NFV-MAN 001 [i.4].

Key operational function categories which are used to organize the requirements on NFV Orchestrator (NFVO), VNF Manager (VNFM) and Virtualised Infrastructure Manager (VIM) in the present document are listed below:

- Virtualised resource management.
- VNF LCM.
- NS LCM.
- VNF information management.
- NS information management.
- NFV performance management.
- NFV fault management.
- Security considerations.
- Software image management.
- NFV acceleration management.
- Multi-tenancy.

NOTE: This categorization groups related functional requirements together. Actual interface requirements derived from the functional requirements may be grouped differently, and/or individual interface requirements may be placed into a group that is different from the category of the related functional requirement.

5 General functional requirements

5.1 General functional requirements for virtualised resource management

The NFV-MANO architecture shall provide support to permit service providers to partially or fully virtualise the Network Functions (NFs) needed to create, deploy and operate the services they provide. In case of partial virtualisation, performance, management and operations of the non-virtualised NFs shall not be impacted.

The NFV-MANO architecture shall be able to support a NS composed of Physical Network Functions (PNFs) and VNFs implemented across multivendor environments.

The NFV-MANO architecture shall be able to manage NFV Infrastructure (NFVI) resources, in order to provide NSs and related VNFs and PNFs with the resources needed. Management of resources for PNFs shall be restricted to provisioning connectivity, e.g. necessary when a NS instance includes a PNF that needs to connect to a VNF.

The NFV-MANO architecture shall enable the NFVO and the VNFM to manage the virtualised resources needed for LCM of the VNFs. The NFV-MANO architecture shall enable deployments and implementations where:

- the NFVO is the only FB to manage the virtualised resources needed for the LCM of the VNF (**VNF-related Resource Management in indirect mode**);
- the VNFM is the only FB to manage the virtualised resources needed for the LCM of the VNF (**VNF-related Resource Management in direct mode**);
- the NFVO and the VNFM, both, manage the virtualised resources needed for the LCM of the VNF.

NOTE: This is a decision per VNFM whether it is the NFVO or the VNFM that manages the virtualised resources.

It is a deployment and implementation decision whether one option or both are deployed and implemented. All VNFs managed by one VNFM shall use the same option for virtualised resource management. The detailed requirements on the NFVO and the VNFM for each case are depicted in clauses 6.1 and 7.1.

In addition to managing the VNF-related virtualised resources as explained above, the NFV-MANO architecture shall enable the NFVO to manage the virtualised resources (i.e. network resources) that are needed for LCM of the NS(s).

Additionally, the NFV-MANO shall enable different models, per resource type, to facilitate availability of resources and to avoid resource contention. It shall be possible for the network operator, on a per NS basis, tenant basis or VNF basis, to select one of the following resource commitment models, or a combination of them:

- **Reservation** model, where resources are committed, but not allocated, to a particular consumer or consumer type. A reservation can have one of the following types (see details in clause A.2.8):
 - 1) reserving a set of resources considering particular virtualised resource configurations, i.e. reserving a number of virtualised containers, virtual networks, network ports and/or storage volumes;
 - 2) reserving virtualised resource capacity without considering particular resource configurations, i.e. reserving virtualised resource capacity of compute, storage and network resource types.
- **Quota/Allowance based** model, where the number of resources to be consumed by a particular consumer is limited to a defined amount or a percentage of resources; in this model, resources are committed upon demand from the consumer when a VNF or a NS is instantiated or scaled out, as long as those are within the limits established by the quota/allowance for that consumer or consumer type.
- **On demand**, where resources are committed when a VNF or a NS is instantiated or scaled out, as long as there are available resources for consumption.

The permitted allowance concept should be distinguished from the quota concept:

- **Quota**: enforced by the VIM. Quotas are usually used to prevent excessive resource consumption in the VIM by a given consumer.

- Permitted allowance: maintained at NFVO level. Permitted allowances might vary in granularity (VNFM, VNF, group of VNFs, NS, etc.) and are used to control resource consumption by VNFMs in relation to the granularity associated with the permitted allowance.

The detailed requirements on the affected FBs are depicted in clauses 6.1, 7.1 and 8.2.

5.2 General functional requirements for multi-tenancy

Multi-tenancy can be applied to all infrastructure and service resources which can be consumed from an NFV system and managed by NFV-MANO.

NOTE 1: The term "resource" as used in the present clause goes beyond the definition of NFV-resource as specified in the NFV Terminology document (ETSI GS NFV 003 [i.2]).

Figure 5.2-1 shows the entities relevant to multi-tenancy for any kind of resources.

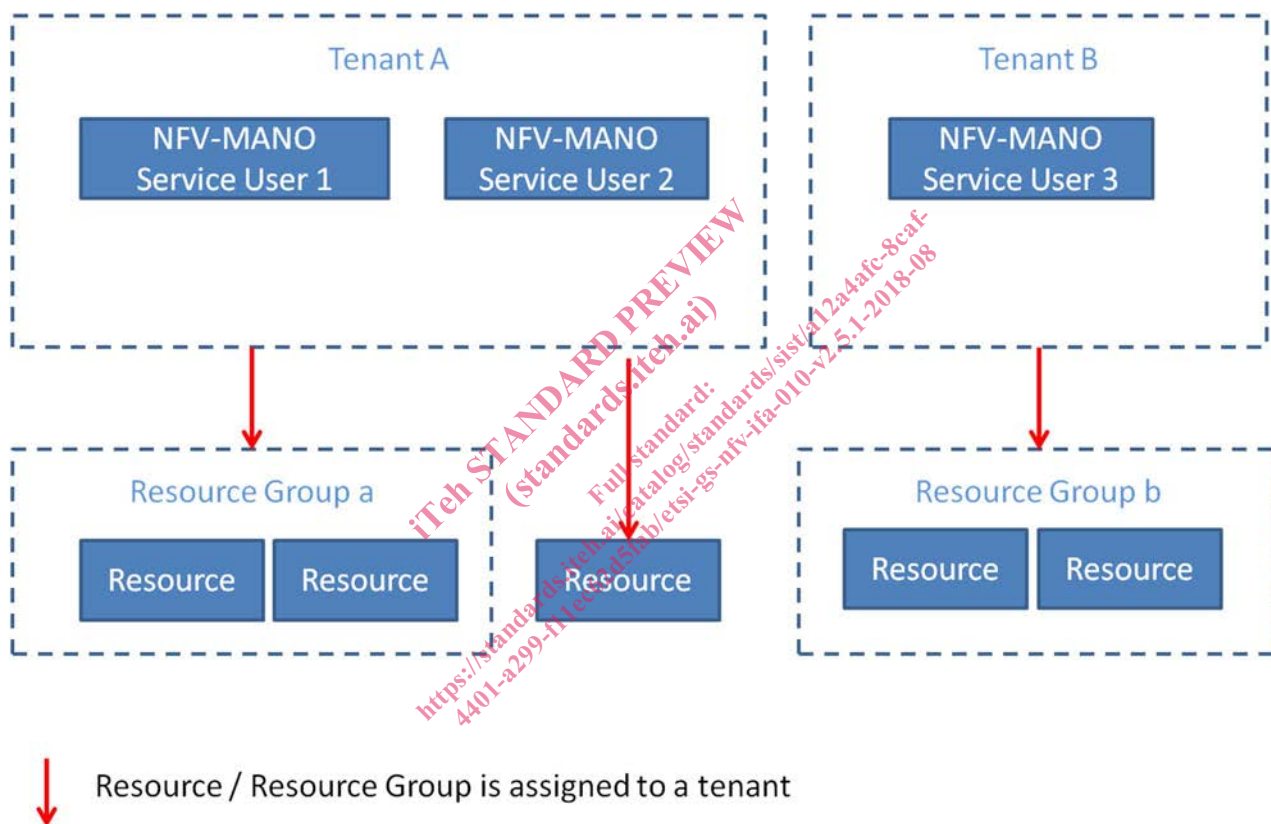


Figure 5.2-1: Entities relevant to multi-tenancy

Each FB may act as multiple tenants on the FBs from which it uses service or infrastructure resources. A service resource e.g. a VNF can be composed from multiple virtual resources from different tenants. Figure 5.2-2 shows an example how a VNFM may use tenants on the VIM.

EXAMPLE: The VNF (Resource Group a) is composed out of virtual resources from Resource Group c. The virtual resources in Resource Group c are assigned to Tenant C. Thus the VNFM has to identify as Tenant C to modify the virtual resources for VNF (Resource Group a). The VNF (Resource Group b) uses virtual resources assigned to Tenant D (Resource Group d) and Tenant E. Therefore the VNFM has to identify as Tenant D or Tenant E or both to modify the virtual resources for VNF (Resource Group b).

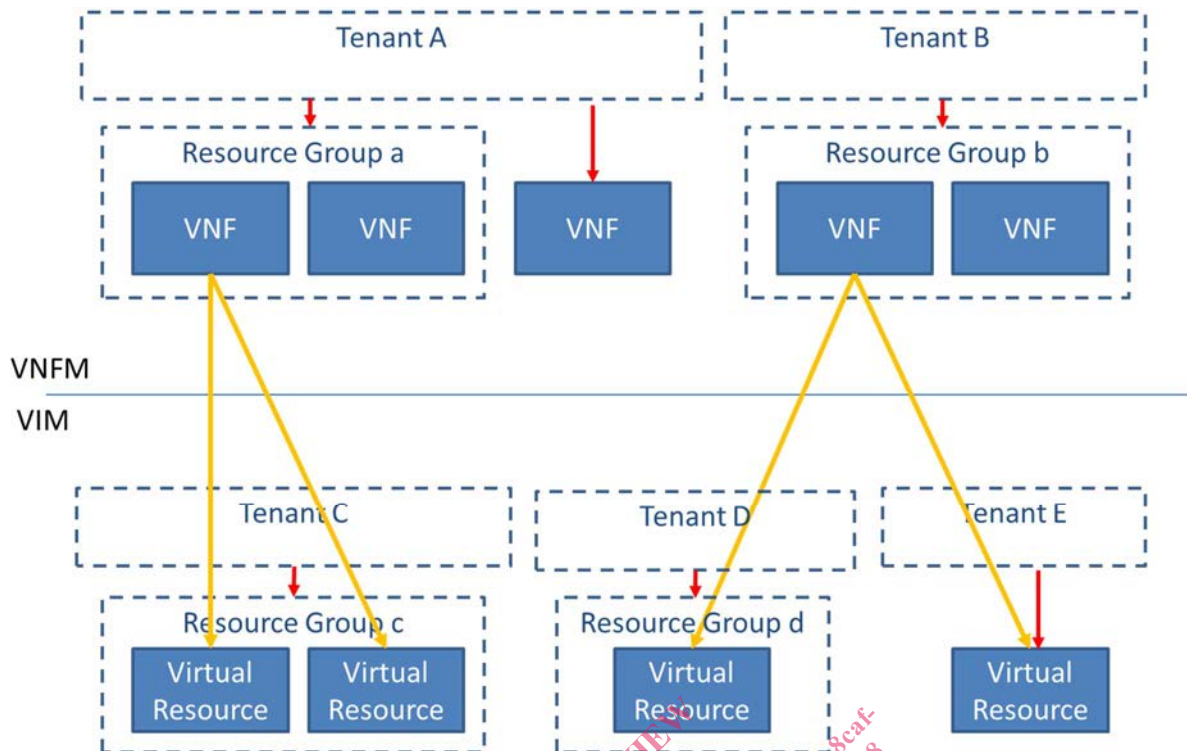


Figure 5.2-2: Example of how a VNFM may use tenants on a VIM

Since multi-tenancy exists for all kinds of service and infrastructure resources which can be used from an NFV-MANO service, tenants can be grouped based in the resources they use:

- A tenant to which virtual resources are assigned is referred to as an infrastructure tenant (Tenant C, D, E).
- A tenant to which VNFs are assigned is referred to as a VNF tenant (Tenant A, B).
- A tenant to which NSs are assigned is referred to as a NS tenant.

A resource group has different meaning for different resources which are being used:

- A resource group can be a "service resource group" containing VNFs, PNFs or NSs instances.
- A resource group can be an "infrastructure resource group" containing a set of virtual resources under the control of a VIM and belonging to a tenant.

6 Functional requirements for NFVO

6.1 Functional requirements for virtualised resource management

6.1.1 Functional requirements for general virtualised resource management

Table 6.1.1-1: Functional requirements for general virtualised resource management

Numbering	Functional requirements description
Nfvo.Gvrm.001	The NFVO shall support orchestration of actions related to virtualised resources managed by one or more VIMs.
Nfvo.Gvrm.002	The NFVO shall support the capability to mitigate conflicts in resource allocation in case of conflicting resource requests.
Nfvo.Gvrm.003	The NFVO shall support the capability to provide deployment-specific configuration information for virtualised resources related to NS.

6.1.2 Functional requirements for VNF-related resource management in indirect mode

Table 6.1.2-1: Functional requirements for VNF-related resource management in indirect mode

Numbering	Functional requirements description
Nfvo.VnfRmpbNfvo.001	When VNF-related Resource Management in indirect mode is applicable, the NFVO shall support the capability to request to the VIM the management of virtualised resources needed for VNFs instantiation, scaling and termination (see notes 1 and 4).
Nfvo.VnfRmpbNfvo.002	When VNF-related Resource Management in indirect mode is applicable, the NFVO shall support the capability to invoke resource management operations toward the VIM as requested by the VNFM.
Nfvo.VnfRmpbNfvo.003	When VNF-related Resource Management in indirect mode is applicable, the NFVO shall support the capability to receive notifications regarding the resources being allocated to or released from specific VNF instances, as well as regarding events and relevant fault reports related to those resources (see notes 1 and 3).
Nfvo.VnfRmpbNfvo.004	When VNF-related Resource Management in indirect mode is applicable, the NFVO shall support the capability to request allocation and update of resources in the different resource commitment models (see note 2).
Nfvo.VnfRmpbNfvo.005	When VNF-related Resource Management in indirect mode is applicable, the NFVO shall support the capability to request to the VIM affinity and anti-affinity policies for the VNF's virtualised resources.(see note 1).
NOTE 1: Virtual resources managed for the LCM of VNFs include compute and storage resources needed for VNF components as well as networking resources needed to ensure intra-VNF connectivity.	
NOTE 2: Resource commitment models are: reservation model, quota model and on-demand.	
NOTE 3: Events include NFVI outage and performance related events.	
NOTE 4: The management of virtualised resources includes allocation, update, scaling, termination, etc. of virtualised resources.	

6.1.3 Functional requirements for VNF-related resource management in direct mode

Table 6.1.3-1: Functional requirements for VNF-related resource management in direct mode

Numbering	Functional requirements description
Nfvo.VnfRmpbVnfm.001	When VNF-related Resource Management in direct mode is applicable, the NFVO shall support the capability to provide appropriate information about VIM to enable the VNFM to access the VIM.