



SLOVENSKI STANDARD

SIST ISO 18413:2016

01-maj-2016

Nadomešča:
SIST ISO 18413:2003

Fluidna tehnika - Hidravlika - Snažnost delov in komponent - Kontrolni dokument in postopki izločanja, analiza umazanije in poročanje o rezultatih

Hydraulic fluid power - Cleanliness of components - Inspection document and principles related to contaminant extraction and analysis, and data reporting

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Transmissions hydrauliques - Propreté des composants - Documents d'inspection et principes d'extraction et d'analyse des contaminants et d'expression des résultats

<https://standards.iteh.ai/catalog/standards/sist/7543077b-e64e-4c4c-92d4-1197a0774d0e/sist-iso-18413-2016>

Ta slovenski standard je istoveten z: ISO 18413:2015

ICS:

23.100.60

Filtri, tesnila in
onesnaževanje tekočin

Filters, seals and
contamination of fluids

SIST ISO 18413:2016

en,fr

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 18413:2016

<https://standards.iteh.ai/catalog/standards/sist/7543077b-e64e-4c4c-92d4-1197a0774d0e/sist-iso-18413-2016>

INTERNATIONAL
STANDARD

ISO
18413

Second edition
2015-03-15

**Hydraulic fluid power — Cleanliness
of components — Inspection
document and principles related to
contaminant extraction and analysis,
and data reporting**

*Transmissions hydrauliques — Propreté des composants —
Documents d'inspection et principes d'extraction et d'analyse des
contaminants et d'expression des résultats*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 18413:2016

<https://standards.iteh.ai/catalog/standards/sist/7543077b-e64e-4c4c-92d4-1197a0774d0e/sist-iso-18413-2016>



Reference number
ISO 18413:2015(E)

© ISO 2015

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 18413:2016

<https://standards.iteh.ai/catalog/standards/sist/7543077b-e64e-4c4c-92d4-1197a0774d0e/sist-iso-18413-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Inspection document principles	4
4.1 Content.....	4
4.2 Component cleanliness requirement.....	4
4.3 Inspection method.....	4
4.4 Effectivity.....	5
4.5 Conformance.....	5
4.6 Verification of conformance to specified component cleanliness requirements.....	5
4.7 Additional information.....	5
5 Guidelines for selecting contamination extraction and analysis procedures	6
5.1 Overview.....	6
5.2 Contaminant extraction.....	6
5.3 Contaminant analysis.....	6
6 Contaminant extraction principles	7
6.1 General.....	7
6.2 Overview.....	7
6.3 Extraction procedure setup and validation.....	7
6.3.1 Setup environment.....	7
6.3.2 Validation.....	8
6.4 Agitation.....	11
6.5 Pressure rinse.....	11
6.6 Ultrasonic vibration.....	12
6.7 Functional test method.....	12
7 Contaminant analysis principles	13
7.1 General.....	13
7.2 Overview.....	13
7.3 Gravimetric analysis.....	13
7.4 Determination of the largest particle size.....	13
7.5 Chemical composition.....	13
7.6 Particle size distribution.....	14
8 Data reporting principles	14
8.1 General.....	14
8.2 Overview.....	14
8.3 Contaminant mass.....	15
8.4 Particle size.....	15
8.5 Particle size distribution.....	15
8.6 Chemical composition.....	15
9 Criterion for acceptance	15
10 Identification statement (reference of this International Standard)	15
Annex A (normative) Contaminant extraction principles — Agitation method	16
Annex B (normative) Contaminant extraction principles — Pressure rinse method	21
Annex C (normative) Contaminant extraction principles — Ultrasonic vibration method	26
Annex D (normative) Contaminant extraction principles — Functional test method	32
Annex E (normative) Contaminant analysis principles and data reporting principles	38

ISO 18413:2015(E)

Annex F (informative) Guidelines for the design of a functional test method test stand	40
Annex G (informative) Determination of geometric characteristics of components	43
Bibliography	46

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 18413:2016](https://standards.iteh.ai/catalog/standards/sist/7543077b-e64e-4c4c-92d4-1197a0774d0e/sist-iso-18413-2016)

<https://standards.iteh.ai/catalog/standards/sist/7543077b-e64e-4c4c-92d4-1197a0774d0e/sist-iso-18413-2016>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

The committee responsible for this document is ISO/TC 131, *Fluid power systems*, Subcommittee SC 6, *Contamination control*.

This second edition ~~http://standards.iteh.ai/catalog/standards/sist-18413-2016/iso-18413-2016~~ ~~1197a0774d0e/sist-iso-18413-2016~~ ~~1197a0774d0e/sist-iso-18413-2016~~ cancels and replaces the first edition (ISO 18413:2002), of which it constitutes a minor revision.

ISO 18413:2015(E)**Introduction**

In hydraulic fluid power systems, power is transmitted and controlled through a pressurized liquid within an enclosed circuit. Contaminants present in the circulating working liquid can degrade system performance. The presence of particles residual from the manufacturing and assembly processes can cause a substantial increase in the wear rates to the system during the initial run-up and early life and can even cause catastrophic failures. In order to achieve reliable performance of components and the system, control over the amount of particles introduced during the build phase is necessary. Accurate assessment of the effectiveness of part and component cleaning requires documentation of both the cleanliness requirement and the methods used for contaminant extraction and analysis and data reporting.

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST ISO 18413:2016

<https://standards.iteh.ai/catalog/standards/sist/7543077b-e64e-4c4c-92d4-1197a0774d0e/sist-iso-18413-2016>

Hydraulic fluid power — Cleanliness of components — Inspection document and principles related to contaminant extraction and analysis, and data reporting

1 Scope

This International Standard specifies the content of an inspection document that specifies both the cleanliness requirement for the specified hydraulic fluid power component and the inspection method to be used for evaluating its cleanliness level. In addition, guidelines for relevant extraction methods and analysis methods are given.

Determination of what constitutes as an appropriate cleanliness level requirement for any particular component is beyond the scope of this International Standard. ISO 12669 provides a method of determining the required cleanliness of a hydraulic system. ISO TR 10686 provides a method of relating the required cleanliness of components to the required cleanliness of the hydraulic system.

For the purposes of this International Standard, approved functional liquids are considered to be components.

This International Standard is applicable to the particulate contamination on the wetted surfaces and volumes of any hydraulic fluid power system component. Appearance defects and liquid or gaseous contamination are not covered by this International Standard.

This International Standard does not address safety problems that might arise from hazardous materials, operations, and equipment associated with its use. The user of this International Standard is responsible for establishing appropriate safety and health practices and determining the applicability of regulatory limitations prior to use.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3722, *Hydraulic fluid power — Fluid sample containers — Qualifying and controlling cleaning methods*

ISO 4021, *Hydraulic fluid power — Particulate contamination analysis — Extraction of fluid samples from lines of an operating system*

ISO 4405, *Hydraulic fluid power — Fluid contamination — Determination of particulate contamination by the gravimetric method*

ISO 4407, *Hydraulic fluid power — Fluid contamination — Determination of particulate contamination by the counting method using an optical microscope*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 11500, *Hydraulic fluid power — Determination of the particulate contamination level of a liquid sample by automatic particle counting using the light-extinction principle*

ISO 11171, *Hydraulic fluid power — Calibration of automatic particle counters for liquids*

ISO 11943, *Hydraulic fluid power — On-line automatic particle-counting systems for liquids — Methods of calibration and validation*

ISO 12103-1, *Road vehicles — Test dust for filter evaluation — Part 1: Arizona test dust*

ISO 18413:2015(E)

ISO 14644-1, *Cleanrooms and associated controlled environments — Part 1: Classification of air cleanliness*

ISO 21018 (all parts), *Hydraulic fluid power — Monitoring the level of particulate contamination in the fluid*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 and the following apply.

3.1**blank level**

amount of contaminant introduced from sources other than the test component, such as reagents, glassware, preparation of test units, and the environment

3.2**blank test**

analysis carried out in the same operating conditions as on the test component but without the test component

Note 1 to entry: The blank test enables quantification of the contamination introduced from sources other than the test component, such as reagents, glassware, preparation of test units, and the environment.

3.3**clean**

state of cleanliness of a component or fluid that meets the specified cleanliness level

3.4**cleanliness**

condition of a product, surface, device, liquid, etc., characterized by the absence of particulate contamination

iTeh STANDARD PREVIEW
(standards.iteh.ai)

3.5**component**

general term to cover a part, a component, a sub-assembly, or a part assembly used in a hydraulic system

SIST ISO 18413:2016

<https://standards.iteh.ai/catalog/standards/sist/7543077b-e64e-4c4c-92d4-1197a0774d0e/sist-iso-18413-2016>

Note 1 to entry: This definition differs from that given for the same term in ISO 5598.

3.6**component contamination**

amount or nature of contaminants extracted from the wetted or controlled surfaces of a component, as measured by an applicable analysis method

3.7**contaminant**

undesirable solid substance that is in suspension in a fluid or in a component or on a controlled surface of a component

Note 1 to entry: For the purposes of this International Standard, contaminants include solid material suspended in liquids, but exclude liquids and gases. This definition differs from ISO 5598 in its exclusion of liquids and gases.

3.8**controlled surface**

wetted surface of a component that is subject to a cleanliness requirement

3.9**controlled volume**

wetted volume of a component that is subject to a cleanliness requirement

3.10**end-point sample**

last in a series of repetitive samples, which produces a result that is ≤ 10 % of all the samples

3.11**external surface**

surface of the component which is not wetted by the system fluid in normal operation

3.12**extraction**

operation required to transfer as much contaminant as possible that is present within a controlled volume or on a controlled surface into a test liquid and its collection for subsequent analysis

3.13**extraction curve**

progress curve of the cleanliness level of an extraction liquid applied to the test component as a function of the number of extractions

Note 1 to entry: This is related to the extraction time or to the volume of test liquid passed through or over the test component.

3.14**extraction liquid**

test liquid loaded with contaminants extracted from the test component

3.15**fluid contamination monitor****FCM**

instrument that quantitatively evaluates the particulate contamination level of a liquid in an on-line mode

3.16**inspection document**

written description of the component cleanliness requirement and the agreed inspection method

3.17**inspection method**

procedure for contaminant extraction, contaminant analysis, and data reporting which is used to evaluate component cleanliness as specified by the inspection document

3.18**representative sample**

material extracted such that it is typical of the amount and nature of the contaminant contained in or on a component

3.19**test liquid**

suitable liquid of known initial cleanliness used to remove, suspend, and extract contaminant from a component and which is compatible with the component being tested and the apparatus used

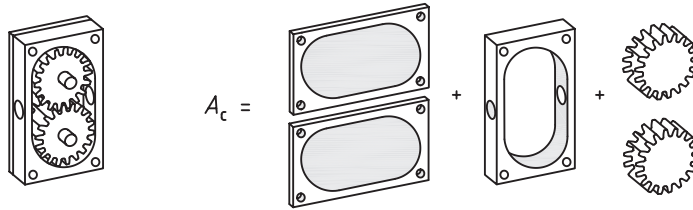
3.20**validation**

process by which a test method evaluates the capability of the contaminant removal process

3.21**wetted surface area** **A_c**

surface area of the component that is exposed to system liquid

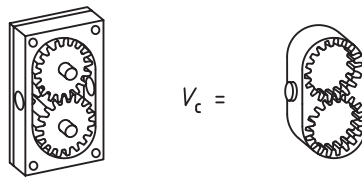
ISO 18413:2015(E)

Figure 1 — Wetted surface area (A_c)

3.22

wetted volume V_c

volume of the component that is exposed to system liquid

Figure 2 — Wetted volume (V_c)

iTeh STANDARD PREVIEW (standards.iteh.ai)

4 Inspection document principles

4.1 Content

SIST ISO 18413:2016

This International Standard specifies the content of the inspection document, not its format. The inspection document may exist as a single document or as a series of related documents. Regardless of format, the inspection document shall clearly identify the component cleanliness requirement and the agreed inspection method.

4.2 Component cleanliness requirement

The inspection document shall define the component cleanliness requirement when this is known. The cleanliness requirement shall be consistent with the known or anticipated function or application of the component. ISO TR 10686 and ISO 12669 give guidance and tools to establish such requirements. The component cleanliness requirement shall be established and agreed upon by the parties involved.

International Standards should be used in preference to other references sources (e.g. example historical data, existing company, industry, and national standards, functional performance, reliability, and durability requirements of the component, and data on similar components to determine the cleanliness requirement for a particular component).

4.3 Inspection method

4.3.1 The inspection document shall specify the inspection method to be used to evaluate component cleanliness. The inspection method shall be established and agreed upon by the parties involved. The inspection method shall be consistent with the design and the cleanliness requirement of the component.

4.3.2 The inspection document shall specify the appropriate parameters applicable to extracting contaminants, conducting analyses, and reporting results. Typical reference sources for consideration in determining the agreed inspection method include: International Standards, previously used methods of contaminant extraction, contaminant analysis, and data reporting; existing company, industry, and

national, standards; functional, reliability, and durability requirements of the component; and methods used on similar parts or components.

4.4 Effectivity

The inspection document shall become effective upon mutual agreement between the parties involved, both of which shall maintain a copy of the applicable inspection document.

4.5 Conformance

Unless otherwise stated in the inspection document,

- a) all components for which a cleanliness level has been specified shall meet that requirement when evaluated in accordance with the agreed inspection method and
- b) it is not necessary to inspect those components for which no cleanliness level has been specified (it is possible that some components are required to meet a specified cleanliness level and others are not).

4.6 Verification of conformance to specified component cleanliness requirements

4.6.1 Conformance to component cleanliness requirements can be verified either by the use of industry-accepted statistical sampling methods or by joint purchaser-supplier monitoring of the inspection processes.

4.6.2 Verification of test results requires special care because differences in method of contaminant extraction or analysis of the same component affect the results obtained. In addition, because the contaminant extraction process results in cleaning of the component used as a test item, that same test item shall not be reused for subsequent conformance verification.

4.7 Additional information

SIST ISO 18413:2016

<https://www.iso.org/standard/7543077b-e64e-4c4c-92d4-1197a0774d0e/sist-iso-18413-2016>

4.7.1 Unless otherwise agreed by purchaser and supplier, [4.7.2](#) to [4.7.5](#) shall apply.

4.7.2 The inspection document shall specify both the required cleanliness level for the component and the scope of its applicability. The points in the process at which the cleanliness requirement applies shall be stated in the inspection document. Because prolonged or improper storage of components can result in the introduction of new contaminants, such as oxidation products, the inspection document shall, when applicable, address these factors.

4.7.3 Temporary shipping covers are excluded from the inspection process; however, any contaminants contributed by such covers shall be included in the evaluation of component cleanliness.

4.7.4 Contaminants contributed by such defects as nicks, blemishes, and discoloration shall be included in the evaluation of component cleanliness.

4.7.5 Where applicable, a requirement for allowable residual magnetic density may be included as part of the inspection document.

NOTE Residual magnetism can cause retention of contaminant on component surfaces and the formation of agglomerates, both of which affect contaminant extraction or analysis or both.

ISO 18413:2015(E)

5 Guidelines for selecting contamination extraction and analysis procedures

5.1 Overview

The following information is intended to be neither exhaustive nor restrictive. It is intended only to assist the user of this International Standard by indicating methods of sample extraction, sample analysis, and data reporting that are widely recognized as appropriate under selected conditions. The requirements applicable to a specific component shall be stated in the inspection document.

5.2 Contaminant extraction

Select the extraction method most suited to the component being inspected from [Table 1](#). The method of contaminant extraction shall be agreed upon and stated in the inspection document.

NOTE [Table 1](#) is a summary of guidelines for selection of contaminant extraction methods as they relate to categories of hydraulic components.

Table 1 — Guidelines for selection of contaminant extraction methods

Component	Contaminant extraction method			
	Agitation	Pressure rinse	Ultrasonic vibration	Functional test
Assemblies				
Pumps and motors	NR	NR	NA	R
Valves and cylinders	NR	NR	NA	R
Manifold and body assemblies	NR	A	A	R
Accumulators	A	NR	NA	R
Simple shapes and housings				
Gears, plates, and shafts	A	R	R	NA
Spools, rods, and pistons	A	R	R	NA
Hardware and seals	A	R	R	NA
Tanks and reservoirs	A	R	NA	NR
Hollow parts				
Manifolds and bodies	R	A	A	A
Hoses and tubes	R	A	A	R
Fittings	A	R	A	A
Filtration components				
Filter elements — cleanable	Method shall be agreed between the supplier and purchaser			
Filter elements — non-cleanable	Method shall be agreed between the supplier and purchaser			
Filter housings	R	A	A	R
R = Recommended A = Acceptable NR = Not recommended NA = Not applicable				

5.3 Contaminant analysis

Select the contaminant analysis method from [Table 2](#). The method of contaminant analysis shall be agreed upon and stated in the inspection document.

Table 2 — Guidelines for selection of contaminant analysis methods

Contaminant extraction method	Contaminant analysis method					
	Gravimetric analysis	Particle size	Chemical composition	Particle size distribution		
				Microscopy	APC ^a (bottle)	APC or FCM ^b (on line)
Agitation	R	R	R	R	R	NA
Pressure rinse	R	R	R	R	R	A
Ultrasonic vibration	R	R	R	R	R	NA
Functional test	A	A	A	R	A	R

R = Recommended
A = Acceptable
NR = Not recommended
NA = Not applicable

^a Determined using a light extinction APC used in accordance with ISO 11500.
^b Determined using a fluid contamination monitor used in accordance with one of the parts of ISO 21018.

6 Contaminant extraction principles

6.1 General

The method of contaminant extraction shall be agreed upon and stated in the inspection document. The measured component cleanliness level depends upon the effectiveness of the extraction procedures chosen and upon whether those extraction methods have been validated (see 6.3). The effectiveness of the contaminant extraction process should be validated by using the end point concept (see 3.10). Testing personnel shall follow the contaminant extraction method(s) specified in the inspection document. Inspection facilities and environment shall be as clean as practicable so as not to significantly affect the measurement of component cleanliness, which is quantified by the blank test (see 6.4.).

6.2 Overview

Contaminant extraction consists of various techniques for removing contaminants from controlled surfaces of components by the hydraulic and chemical action of a suitable liquid, suspending contaminant in the test liquid, then collecting the extraction liquid and suspended contaminant for analysis. This International Standard describes four basic contaminant extraction techniques: agitation, pressure rinse, ultrasonic vibration, and functional test method. Other methods of contaminant extraction may also be used when agreed upon between supplier and purchaser. The contaminant extraction method shall be properly validated. The entire extraction fluid volume used shall be analysed and processed as such.

6.3 Extraction procedure setup and validation

6.3.1 Setup environment

6.3.1.1 The number of components to be analysed shall be chosen so as to measure a significant amount of contaminant that complies with the requirement for a blank.

6.3.1.2 If the break-in of the component is part of its manufacturing process, the extraction procedure shall be agreed between parties and included in the inspection document because break-in can alter its initial cleanliness level.

6.3.1.3 The contaminants included in the inspection process are particles that have been detached from controlled surfaces during transportation of the test component, particles from the packaging, and those