



SLOVENSKI STANDARD
SIST ETS 300 977 E2:2003

01-december-2003

8 [[[HJb]`WV] b]`hY`ca i b]_UW`g_]`g]ghYa `fZuU&ZL`E`GdYWZ_ UW`Uj a Ygb]_U
bUfc b]y_]`XYbhZ_ UW`g_]`a cXi `!a cV]bUcdfYa UfG-A!A9L`f] GA `%%`%`zfUn`]]WU
)`)'%L

Digital cellular telecommunications system (Phase 2+) (GSM); Specification of the
Subscriber Identity Module - Mobile Equipment (SIM - ME) interface (GSM 11.11 version
5.5.1)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 977 E2:2003](https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acf6/sist-ets-300-977-e2-2003)

[https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-](https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acf6/sist-ets-300-977-e2-2003)

[7ee8a1a8acf6/sist-ets-300-977-e2-2003](https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acf6/sist-ets-300-977-e2-2003)

Ta slovenski standard je istoveten z: ETS 300 977 Edition 2

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	--	---


SIST ETS 300 977 E2:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 977 E2:2003

<https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acf6/sist-ets-300-977-e2-2003>

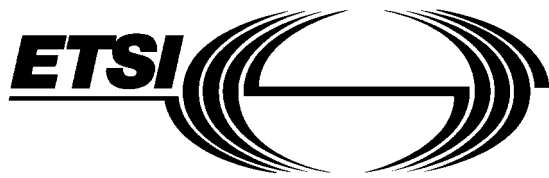

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 977

October 1997

Second Edition

Source: SMG

Reference: RE/SMG-091111QR3

ICS: 33.020

Key words: Digital cellular telecommunications system, Global System for Mobile communications (GSM)



**Digital cellular telecommunications system (Phase 2+);
Specification of the Subscriber Identity Module -
Mobile Equipment (SIM - ME) interface
(GSM 11.11 version 5.5.1)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 977 E2:2003](https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acf6/sist-ets-300-977-e2-2003)

<https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acf6/sist-ets-300-977-e2-2003>

ETS 300 977 (GSM 11.11 version 5.5.1): October 1997
Contents

Foreword	7
1 Scope.....	9
2 Normative references.....	9
3 Definitions, abbreviations and symbols	11
3.1 Definitions.....	11
3.2 Abbreviations	12
3.3 Symbols	13
4 Physical characteristics.....	13
4.1 Format and layout	13
4.1.1 ID-1 SIM.....	14
4.1.2 Plug-in SIM	14
4.2 Temperature range for card operation.....	14
4.3 Contacts.....	14
4.3.1 Provision of contacts.....	14
4.3.2 Activation and deactivation	14
4.3.3 Inactive contacts.....	15
4.3.4 Contact pressure.....	15
4.4 Precedence.....	15
4.5 Static Protection.....	15
5 Electronic signals and transmission protocols.....	15
5.1 Supply voltage Vcc (contact C1).....	16
5.2 Reset (RST) (contact C2).....	16
5.3 Programming voltage Vpp (contact C6).....	16
5.4 Clock CLK (contact C3)	16
5.5 I/O (contact C7)	17
5.6 States	17
5.7 Baudrate.....	18
5.8 Answer To Reset (ATR).....	18
5.8.1 Structure and contents	18
5.8.2 PTS procedure.....	19
5.8.3 Speed enhancement	20
5.9 Bit/character duration and sampling time	21
5.10 Error handling.....	21
6 Logical Model.....	21
6.1 General description	21
6.2 File identifier	22
6.3 Dedicated files	22
6.4 Elementary files.....	22
6.4.1 Transparent EF	22
6.4.2 Linear fixed EF	23
6.4.3 Cyclic EF	23
6.5 Methods for selecting a file	24
6.6 Reservation of file IDs.....	25
7 Security features	26
7.1 Authentication and cipher key generation procedure	26
7.2 Algorithms and processes	26
7.3 File access conditions.....	26
8 Description of the functions.....	28
8.1 SELECT	28

STANDARD PREVIEW
 (standards.iteh.ai)

ETS 300 977 (GSM 11.11 version 5.5.1): October 1997

8.2	STATUS	28
8.3	READ BINARY	28
8.4	UPDATE BINARY	29
8.5	READ RECORD	29
8.6	UPDATE RECORD	29
8.7	SEEK	30
8.8	INCREASE	31
8.9	VERIFY CHV	31
8.10	CHANGE CHV	31
8.11	DISABLE CHV	32
8.12	ENABLE CHV	32
8.13	UNBLOCK CHV	32
8.14	INVALIDATE	33
8.15	REHABILITATE	33
8.16	RUN GSM ALGORITHM	33
8.17	SLEEP	33
8.18	TERMINAL PROFILE	33
8.19	ENVELOPE	34
8.20	FETCH	34
8.21	TERMINAL RESPONSE	34
9	Description of the commands	34
9.1	Mapping principles	34
9.2	Coding of the commands	37
9.2.1	SELECT	38
9.2.2	STATUS	40
9.2.3	READ BINARY	40
9.2.4	UPDATE BINARY	40
9.2.5	READ RECORD	40
9.2.6	UPDATE RECORD	41
9.2.7	SEEK	41
9.2.8	INCREASE	41
9.2.9	VERIFY CHV	42
9.2.10	CHANGE CHV	42
9.2.11	DISABLE CHV	42
9.2.12	ENABLE CHV	43
9.2.13	UNBLOCK CHV	43
9.2.14	INVALIDATE	43
9.2.15	REHABILITATE	43
9.2.16	RUN GSM ALGORITHM	43
9.2.17	SLEEP	44
9.2.18	GET RESPONSE	44
9.2.19	TERMINAL PROFILE	44
9.2.20	ENVELOPE	44
9.2.21	FETCH	45
9.2.22	TERMINAL RESPONSE	45
9.3	Definitions and coding	45
9.4	Status conditions returned by the card	47
9.4.1	Responses to commands which are correctly executed	47
9.4.2	Responses to commands which are postponed	47
9.4.3	Memory management	47
9.4.4	Referencing management	47
9.4.5	Security management	47
9.4.6	Application independent errors	48
9.4.7	Commands versus possible status responses	48
10	Contents of the Elementary Files (EF)	49
10.1	Contents of the EFs at the MF level	49
10.1.1	EF _{ICCID} (ICC Identification)	49
10.2	DFs at the GSM application level	50
10.3	Contents of files at the GSM application level	50
10.3.1	EF _{L_P} (Language preference)	50
10.3.2	EF _{IMSI} (IMSI)	51

ETS 300 977 (GSM 11.11 version 5.5.1): October 1997

10.3.3	EF _{Kc} (Ciphering key Kc).....	52
10.3.4	EF _{PLMNsel} (PLMN selector).....	52
10.3.5	EF _{HPLMN} (HPLMN search period).....	53
10.3.6	EF _{ACMmax} (ACM maximum value).....	54
10.3.7	EF _{SST} (SIM service table).....	55
10.3.8	EF _{ACM} (Accumulated call meter).....	57
10.3.9	EF _{GID1} (Group Identifier Level 1).....	57
10.3.10	EF _{GID2} (Group Identifier Level 2).....	57
10.3.11	EF _{SPN} (Service Provider Name).....	58
10.3.12	EF _{PUCT} (Price per unit and currency table).....	58
10.3.13	EF _{CBMI} (Cell broadcast message identifier selection).....	59
10.3.14	EF _{BCCH} (Broadcast control channels).....	60
10.3.15	EF _{ACC} (Access control class).....	60
10.3.16	EF _{FPLMN} (Forbidden PLMNs).....	61
10.3.17	EF _{LOCI} (Location information).....	61
10.3.18	EF _{AD} (Administrative data).....	63
10.3.19	EF _{Phase} (Phase identification).....	64
10.3.20	EF _{VGCS} (Voice Group Call Service).....	64
10.3.21	EF _{VGCS} (Voice Group Call Service Status).....	65
10.3.22	EF _{VBS} (Voice Broadcast Service).....	66
10.3.23	EF _{VBS} (Voice Broadcast Service Status).....	66
10.3.24	EF _{eMLPP} (enhanced Multi Level Pre-emption and Priority).....	67
10.3.25	EF _{AAeM} (Automatic Answer for eMLPP Service).....	67
10.3.26	EF _{CBMID} (Cell Broadcast Message Identifier for Data Download).....	68
10.3.27	EF _{ECC} (Emergency Call Codes).....	69
10.3.28	EF _{CBMIR} (Cell broadcast message identifier range selection).....	70
10.3.29	EF _{DCK} De-personalization Control Keys.....	70
10.3.30	EF _{CNL} (Co-operative Network List).....	71
10.4	Contents of files at the telecom level.....	72
10.4.1	EF _{ADN} (Abbreviated dialling numbers).....	72
10.4.2	EF _{FDN} (Fixed dialling numbers).....	75
10.4.3	EF _{SMS} (Short messages).....	76
10.4.4	EF _{CCP} (Capability configuration parameters).....	76
10.4.5	EF _{MSISDN} (MSISDN).....	77
10.4.6	EF _{SMSP} (Short message service parameters).....	77
10.4.7	EF _{SMSS} (SMS status).....	79
10.4.8	EF _{LND} (Last number dialled).....	80
10.4.9	EF _{SDN} (Service Dialling Numbers).....	80
10.4.10	EF _{EXT1} (Extension1).....	81
10.4.11	EF _{EXT2} (Extension2).....	82
10.4.12	EF _{EXT3} (Extension3).....	82
10.4.13	EF _{BDN} (Barred Dialling Numbers).....	83
10.4.14	EF _{EXT4} (Extension4).....	83
10.5	Files of GSM (figure 8).....	84
11	Application protocol.....	86
11.1	General procedures.....	87
11.1.1	Reading an EF.....	87
11.1.2	Updating an EF.....	87
11.1.3	Increasing an EF.....	88
11.2	SIM management procedures.....	88
11.2.1	SIM initialization.....	88
11.2.2	GSM session termination.....	89
11.2.3	Emergency Call Codes.....	90
11.2.4	Language preference.....	90
11.2.5	Administrative information request;.....	90
11.2.6	SIM service table request.....	90
11.2.7	SIM phase request.....	90
11.2.8	SIM Presence Detection and Proactive Polling.....	90
11.3	CHV related procedures.....	90
11.3.1	CHV verification.....	91
11.3.2	CHV value substitution.....	91
11.3.3	CHV disabling.....	91

ETS 300 977 (GSM 11.11 version 5.5.1): October 1997

	11.3.4	CHV enabling.....	91
	11.3.5	CHV unblocking	91
11.4		GSM security related procedures	92
	11.4.1	GSM algorithms computation.....	92
	11.4.2	IMSI request	92
	11.4.3	Access control request.....	92
	11.4.4	HPLMN search period request.....	92
	11.4.5	Location information.....	92
	11.4.6	Cipher key.....	92
	11.4.7	BCCH information	92
	11.4.8	Forbidden PLMN.....	92
11.5		Subscription related procedures.....	92
	11.5.1	Dialling numbers	92
	11.5.2	Short messages	95
	11.5.3	Advice of Charge (AoC)	95
	11.5.4	Capability configuration parameters.....	96
	11.5.5	PLMN selector.....	96
	11.5.6	Cell broadcast message identifier	96
	11.5.7	Group identifier level 1	96
	11.5.8	Group identifier level 2	96
	11.5.9	Service Provider Name.....	96
	11.5.10	Voice Group Call Services.....	96
	11.5.11	Voice Broadcast Services.....	97
	11.5.12	Enhanced Multi Level Pre-emption and Priority Service	97
	11.5.13	Cell Broadcast Message range identifier.....	97
	11.5.14	Depersonalisation Control Keys	97
11.6		SIM Application Toolkit related procedures.....	97
	11.6.1	Initialization procedure.....	98
	11.6.2	Proactive polling	98
	11.6.3	Support of commands.....	98
	11.6.4	Support of response codes.....	98
	11.6.5	Command-response pairs.....	98
	11.6.6	Independence of normal GSM and SIM Application Toolkit tasks.....	98
	11.6.7	Use of BUSY status response.....	98
	11.6.8	Use of NULL procedure byte.....	99
	11.6.9	Using the TERMINAL PROFILE, ENVELOPE, and TERMINAL RESPONSE commands	99
	11.6.10	Using the FETCH command.....	99
	11.6.11	Data Download via SMS-CB.....	99
	11.6.12	Data Download via SMS-PP	99
	11.6.13	Menu selection	99
	11.6.14	Call Control	99
	11.6.15	Proactive SIM.....	99
Annex A (normative):		Plug-in SIM	100
Annex B (informative):		FDN/BDN Procedures.....	101
Annex C (informative):		Suggested contents of the EFs at pre-personalization	107
Annex D (informative):		SIM application Toolkit protocol diagrams	108
Annex E (informative):		Bibliography	115
History.....			116

Foreword

This European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) of the European Telecommunications Standards Institute (ETSI).

This ETS defines the interface between the Subscriber Identity Module (SIM) and the Mobile Equipment (ME) for use during the network operation phase of GSM as well as those aspects of the internal organization of the SIM which are related to the network operation phase, within the digital cellular telecommunications system (Phase 2/Phase 2+).

This ETS is a GSM technical specification version 5 and is part of the 1996 release of the GSM Technical Specifications. The ETS from which this Phase 2+ ETS has evolved is Phase 2 GSM ETS 300 608 Edition 5 (GSM 11.11 version 4.18.2).

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI/PNE Rules.

Transposition dates	
Date of adoption:	24 October 1997
Date of latest announcement of this ETS (doa):	31 January 1998
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 July 1998
Date of withdrawal of any conflicting National Standard (dow):	31 July 1998

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 977 E2:2003](https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acfb/sist-ets-300-977-e2-2003)

<https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acfb/sist-ets-300-977-e2-2003>

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 977 E2:2003](https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acf6/sist-ets-300-977-e2-2003)

<https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7ee8a1a8acf6/sist-ets-300-977-e2-2003>

1 Scope

This European Telecommunication Standard (ETS) defines the interface between the Subscriber Identity Module (SIM) and the Mobile Equipment (ME) for use during the network operation phase of GSM as well as those aspects of the internal organization of the SIM which are related to the network operation phase. This is to ensure interoperability between a SIM and an ME independently of the respective manufacturers and operators. The concept of a split of the Mobile Station (MS) into these elements as well as the distinction between the GSM network operation phase, which is also called GSM operations, and the administrative management phase are described in the GSM 02.17 [6].

This ETS defines:

- the requirements for the physical characteristics of the SIM, the electrical signals and the transmission protocols;
- the model which shall be used as a basis for the design of the logical structure of the SIM;
- the security features;
- the interface functions;
- the commands;
- the contents of the files required for the GSM application;
- the application protocol.

Unless otherwise stated, references to GSM also apply to DCS 1 800.

This ETS does not specify any aspects related to the administrative management phase. Any internal technical reallocation of either the SIM or the ME are only specified where these reflect over the interface. This ETS does not specify any of the security algorithms which may be used.

This ETS defines the SIM/ME interface for GSM Phase 2. While all attempts have been made to maintain phase compatibility, any issues that specifically relate to Phase 1 should be referenced from within the relevant Phase 1 specification.

2 Normative references

This European Telecommunication Standard (ETS) incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of, any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] GSM 01.02: "Digital cellular telecommunications system (Phase 2+); General description of a GSM Public Land Mobile Network (PLMN)".
- [2] GSM 01.04 (ETR 350): "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [3] GSM 02.07 (ETS 300 906): "Digital cellular telecommunications system (Phase 2+); Mobile Stations (MS) features".
- [4] GSM 02.09 (ETS 300 920): "Digital cellular telecommunications system; Security aspects".
- [5] GSM 02.11 (ETS 300 921): "Digital cellular telecommunications system; Service accessibility".
- [6] GSM 02.17 (ETS 300 922): "Digital cellular telecommunications system; Subscriber Identity Modules (SIM); Functional characteristics".

- [7] GSM 02.24 (ETS 300 923): "Digital cellular telecommunications system; Description of Charge Advice Information (CAI)".
- [8] GSM 02.30 (ETS 300 907): "Digital cellular telecommunications system (Phase 2+); Man-Machine Interface (MMI) of the Mobile Station (MS)".
- [9] GSM 02.86: "Digital cellular telecommunications system; Advice of Charge (AoC) Supplementary Services - Stage 1".
- [10] GSM 03.03 (ETS 300 927): "Digital cellular telecommunications system (Phase 2+); Numbering, addressing and identification".
- [11] GSM 03.20 (ETS 300 929): "Digital cellular telecommunications system (Phase 2+); Security related network functions".
- [12] GSM 03.38 (ETS 300 900): "Digital cellular telecommunications system (Phase 2+); Alphabets and language-specific information".
- [13] GSM 03.40 (ETS 300 901): "Digital cellular telecommunications system (Phase 2+); Technical realization of the Short Message Service (SMS); Point-to-Point (PP)".
- [14] GSM 03.41 (ETS 300 902): "Digital cellular telecommunications system (Phase 2+); Technical realization of Short Message Service Cell Broadcast (SMSCB)".
- [15] GSM 04.08 (ETS 300 940): "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 specification".
- [16] GSM 04.11 (ETS 300 942): "Digital cellular telecommunications system (Phase 2+); Point-to-Point (PP) Short Message Service (SMS) support on mobile radio interface".
<https://standards.iteh.ai/catalog/standards/sist/a61206d9-33fa-45f2-ac99-7784128ac6/sist-ets-300-977-e2-2003>
- [17] GSM 09.91 (ETR 174): "Digital cellular telecommunications system (Phase 2); Interworking aspects of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface between Phase 1 and Phase 2".
- [18] CCITT Recommendation E.118: "The international telecommunication charge card".
- [19] CCITT Recommendation E.164: "Numbering plan for the ISDN era".
- [20] CCITT Recommendation T.50: "International Alphabet No. 5". (ISO 646: 1983, Information processing - ISO 7-bits coded characters set for information interchange).
- [21] ISO/IEC 7810 (1995): "Identification cards - Physical characteristics".
- [22] ISO/IEC 7811-1 (1995): "Identification cards - Recording technique - Part 1: Embossing".
- [23] ISO/IEC 7811-3 (1995): "Identification cards - Recording technique - Part 3: Location of embossed characters on ID-1 cards".
- [24] ISO 7816-1 (1987): "Identification cards - Integrated circuit(s) cards with contacts, Part 1: Physical characteristics".
- [25] ISO 7816-2 (1988): "Identification cards - Integrated circuit(s) cards with contacts, Part 2: Dimensions and locations of the contacts".
- [26] ISO/IEC 7816-3 (1989): "Identification cards - Integrated circuit(s) cards with contacts, Part 3: Electronic signals and transmission protocols".

- [27] GSM 11.14: "Digital cellular telecommunications system (Phase 2+); Specification of the SIM Application Toolkit for the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [28] GSM 11.12 (ETS 300 641): "Digital cellular telecommunications system (Phase 2); Specification of the 3 Volt Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [29] GSM 02.22: "Digital cellular telecommunications system (Phase 2+); Personalization of GSM Mobile Equipment (ME) Mobile functionality specification".

3 Definitions, abbreviations and symbols

3.1 Definitions

For the purposes of this ETS, the following definitions apply. For further information and definitions refer to GSM 01.02 [1].

access conditions: A set of security attributes associated with a file.

application: An application consists of a set of security mechanisms, files, data and protocols (excluding transmission protocols).

application protocol: The set of procedures required by the application.

card session: A link between the card and the external world starting with the ATR and ending with a subsequent reset or a deactivation of the card.

current directory: The latest MF or DF selected.

current EF: The latest EF selected.

data field: Obsolete term for Elementary File.

Dedicated File (DF): A file containing access conditions and, optionally, Elementary Files (EFs) or other Dedicated Files (DFs).

directory: General term for MF and DF.

Elementary File (EF): A file containing access conditions and data and no other files.

file: A directory or an organized set of bytes or records in the SIM.

file identifier: The 2 bytes which address a file in the SIM.

GSM or DCS 1 800 application: Set of security mechanisms, files, data and protocols required by GSM or DCS 1 800.

GSM session: That part of the card session dedicated to the GSM operation.

IC card SIM: Obsolete term for ID-1 SIM.

ID-1 SIM: The SIM having the format of an ID-1 card (see ISO 7816-1 [24]).

Master File (MF): The unique mandatory file containing access conditions and optionally DFs and/or EFs.

normal GSM operation: Relating to general, CHV related, GSM security related and subscription related procedures.

padding: One or more bits appended to a message in order to cause the message to contain the required number of bits or bytes.

plug-in SIM: A Second format of SIM (specified in clause 4).

proactive SIM: A SIM which is capable of issuing commands to the ME. Part of SIM Application Toolkit (see clause 11).

record: A string of bytes within an EF handled as a single entity (see clause 6).

record number: The number which identifies a record within an EF.

record pointer: The pointer which addresses one record in an EF.

root directory: Obsolete term for Master File.

SIM application toolkit procedures: Defined in GSM 11.14 [27].

3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply, in addition to those listed in GSM 01.04 [2]:

A3	Algorithm 3, authentication algorithm; used for authenticating the subscriber
A5	Algorithm 5, cipher algorithm; used for enciphering/deciphering data
A8	Algorithm 8, cipher key generator; used to generate K_C
A38	A single algorithm performing the functions of A3 and A8
ACM	Accumulated Call Meter
ADN	Abbreviated Dialling Number
ADM	Access condition to an EF which is under the control of the authority which creates this file
ALW	ALWays
AoC	Advice of Charge
APDU	Application Protocol Data Unit
ATR	Answer To Reset
BCCH	Broadcast Control Channel
BCD	Binary Coded Decimal
BDN	Barred Dialling Number
BTS	Base Transmitter Station
CB	Cell Broadcast
CBMI	Cell Broadcast Message Identifier
CCITT	The International Telegraph and Telephone Consultative Committee (now also known as the ITU Telecommunications Standardization sector)
CCP	Capability/Configuration Parameter
CHV	Card Holder Verification information; access condition used by the SIM for the verification of the identity of the user
CLA	CLAss
CNL	Co-operative Network List
DCK	De-personalization Control Keys
DCS	Digital Cellular System
DF	Dedicated File (abbreviation formerly used for Data Field)
DTMF	Dual Tone Multiple Frequency
ECC	Emergency Call Code
EF	Elementary File
ETSI	European Telecommunications Standards Institute
eMLPP	enhanced Multi-Level Precedence and Pre-emption Service
etu	elementary time unit
FDN	Fixed Dialling Number
GSM	Global System for Mobile communications
HPLMN	Home PLMN
IC	Integrated Circuit
ICC	Integrated Circuit(s) Card
ID	IDentifier
IEC	International Electrotechnical Commission

IMSI	International Mobile Subscriber Identity
ISO	International Organization for Standardization
Kc	Cryptographic key; used by the cipher A5
Ki	Subscriber authentication key; the cryptographic key used by the authentication algorithm, A3, and cipher key generator, A8
LAI	Location Area Information; information indicating a cell or a set of cells
lgth	The (specific) length of a data unit
LND	Last Number Dialed
LSB	Least Significant Bit
MCC	Mobile Country Code
ME	Mobile Equipment
MF	Master File
MMI	Man Machine Interface
MNC	Mobile Network Code
MS	Mobile Station
MSISDN	Mobile Station international ISDN number
MSB	Most Significant Bit
NET	NETwork
NEV	NEVer
NPI	Numbering Plan Identifier
PIN/PIN2	Personal Identification Number / Personal Identification Number 2 (obsolete terms for CHV1 and CHV2, respectively)
PLMN	Public Land Mobile Network
PTS	Protocol Type Select (response to the ATR)
PUK/PUK2	PIN Unblocking Key / PIN2 Unblocking Key (obsolete terms for UNBLOCK CHV1 and UNBLOCK CHV2, respectively)
RAND	A RANDom challenge issued by the network
RFU	Reserved for Future Use
SDN	Service Dialling Number
SIM	Subscriber Identity Module
SMS	Short Message Service
SRES	Signed REsponse calculated by a SIM
SSC	Supplementary Service Control string
SW1/SW2	Status Word 1 / Status Word 2
TMSI	Temporary Mobile Subscriber Identity
TON	Type Of Number
TP	Transfer layer Protocol
TPDU	Transfer Protocol Data Unit
TS	Technical Specification
UNBLOCK CHV1/2	value to unblock CHV1/CHV2
VBS	Voice Broadcast Service
VGCS	Voice Group Call Service
VPLMN	Visited PLMN

3.3 Symbols

Vcc	Supply voltage
Vpp	Programming voltage
'0' to '9' and 'A' to 'F'	The sixteen hexadecimal digits

4 Physical characteristics

Two physical types of SIM are specified. These are the "ID-1 SIM" and the "Plug-in SIM".

The physical characteristics of both types of SIM shall be in accordance with ISO 7816-1, 2 [24, 25] unless otherwise specified. The following additional requirements shall be applied to ensure proper operation in the GSM environment.

4.1 Format and layout

The information on the exterior of either SIM should include at least the individual account identifier and the check digit of the IC Card Identification (see clause 10, EF_{ICCID}).