



**Speech and multimedia Transmission Quality (STQ);
Transmission requirements for narrowband
wireless terminals (handset and headset)
from a QoS perspective as perceived by the user**

*Full Standard (TS) for free-bd15-
17-2018-10*
ITeH is AVAILABLE FOR PREVIEW
(standard@itih.ai)
*Full Standard (TS) for free-bd15-
17-2018-10*
<https://standards.itih.ai/catalog/standards/sis/4aa4-9893-c81d6dae8fc/etsi-103-737-v1-3-1>

Reference

RTS/STQ-272-1

Keywords

speech, terminal

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	5
Introduction	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references.....	7
3 Definitions and abbreviations.....	8
3.1 Definitions.....	8
3.2 Abbreviations	8
4 Configurations and interfaces.....	9
4.0 Introduction	9
4.1 Access networks.....	9
4.2 Additional (radio) links between the terminal and external electroacoustical devices.....	9
5 Test Configurations	10
5.1 Set-up interface	10
5.2 Set-up for terminals.....	10
5.2.0 General.....	10
5.2.1 Setup for handsets and headsets.....	11
5.2.2 Setup of variable echo path.....	11
5.2.3 Setup for testing positional robustness of handsets.....	12
5.3 Acoustical environment.....	13
5.4 Test signals.....	13
5.5 Calibration.....	14
5.6 Environmental conditions for tests.....	16
5.7 Accuracy of test equipment.....	16
5.8 Power feeding conditions	16
5.9 Influence of terminal delay on measurements	16
6 Codec independent requirements and associated Measurement Methodologies.....	17
6.1 Send and receive frequency response.....	17
6.1.1 Send frequency response	17
6.1.2 Receive frequency response.....	18
6.1.3 Positional Robustness of Frequency Response	21
6.1.3.1 Send.....	21
6.1.3.2 Receive.....	21
6.2 Send and receive loudness ratings.....	21
6.2.1 Send Loudness Rating (SLR).....	21
6.2.2 Microphone (Mic) mute	22
6.2.3 Receive Loudness Rating (RLR)	22
6.2.4 Positional Robustness of LR.....	23
6.2.4.1 SLR	23
6.2.4.2 RLR.....	23
6.3 Sidetone parameters	23
6.3.0 Introduction.....	23
6.3.1 Sidetone Masking Rating (STMR)	24
6.3.2 Sidetone delay.....	24
6.4 Send and receive noise	25
6.4.1 Send noise.....	25
6.4.2 Receive noise.....	25
6.5 Send and receive distortion	26
6.5.0 Introduction.....	26

6.5.1	Send Distortion	26
6.5.2	Receive distortion	27
6.6	Stability loss and TCLw	27
6.6.1	Stability loss.....	27
6.6.2	Terminal Coupling Loss weighted (TCLw).....	28
6.7	Double talk performance	29
6.7.0	Introduction.....	29
6.7.1	Attenuation Range in Send Direction during Double Talk $A_{H,S,dt}$	29
6.7.2	Attenuation Range in Receive Direction during Double Talk $A_{H,R,dt}$	30
6.7.3	Detection of echo components during double Talk	31
6.7.4	Minimum activation level and sensitivity of double talk detection	32
6.8	Switching parameters	32
6.8.1	Activation in Send Direction	32
6.8.2	Minimum activation level and sensitivity in receive direction	33
6.8.3	Automatic level control	33
6.8.4	Silence Suppression and Comfort Noise Generation	33
6.9	Background noise performance	33
6.9.1	Performance in send direction in the presence of background noise	33
6.9.2	Speech Quality in the Presence of Background Noise	34
6.9.3	Quality of Background Noise Transmission (with Far End Speech)	35
6.9.4	Positional Robustness of Speech Quality in the Presence of Background Noise.....	36
6.10	Quality of echo cancellation	36
6.10.1	Temporal echo effects.....	36
6.10.2	Spectral Echo Attenuation	37
6.10.3	Occurrence of Artifacts.....	37
6.11	Send and receive delay - round trip delay	37
6.12	Void.....	39
6.13	Variable echo path.....	39
7	Codec dependent requirements and associated Measurement Methodologies.....	39
7.1	Speech Coders	39
7.2	Objective listening speech quality.....	40
7.2.0	Introduction.....	40
7.2.1	Objective listening speech quality MOS-LQO in send direction.....	40
7.2.2	Objective listening quality MOS-LQO in receive direction	40
7.2.2.1	Jitter- and Error-Free Condition	40
7.2.2.2	Packet Impairments	41
Annex A (informative): Bibliography		44
History		45

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Speech and multimedia Transmission Quality (STQ).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Introduction

The present document covers wireless speech terminals. It aims to enhance the interoperability and end-to-end quality with all other types of terminals.

The advanced signal processing of terminals is targeted to speech signals. Therefore, wherever possible speech signals are used for testing in order to achieve mostly realistic test conditions and meaningful results.

1 Scope

The present document provides speech transmission performance requirements for wireless terminals; it addresses all types of wireless terminals, including softphones. The present document addresses handset and headset functions of narrow-band wireless terminals.

In contrast to other standards which define minimum performance requirements it is the intention of the present document to specify terminal equipment requirements which enable manufacturers and service providers to enable good quality end-to-end speech performance as perceived by the user, whatever be the radio link (terminals may implement different radio links with the access network).

When an additional radio link between the terminal and external electroacoustical devices is used (e.g. Bluetooth[®] link), the standard will address the overall quality.

In the present document objective measurement methodologies and requirements for wireless speech terminals are given.

In addition to basic testing procedures, the present document describes advanced testing procedures taking into account further quality parameters as perceived by the user.

The requirements available in the present document will ensure a high compatibility across access networks with all types of terminals.

It is the aim to optimize the listening and talking quality, conversational performance, as well as the use in noisy environment. Related requirements and test methods will be defined in the present document.

For all the functions, the standard will consider the limitations in audio performance due to different form factors (e.g. size, shape).

Terminals which are not intended to be connected to public networks are outside the scope of the present document.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] Recommendation ITU-T P.50: "Artificial voices".
- [2] Recommendation ITU-T P.56: "Objective measurement of active speech level".
- [3] Recommendation ITU-T P.57: "Artificial ears".
- [4] Recommendation ITU-T P.58: "Head and torso simulator for telephony".
- [5] Recommendation ITU-T P.64: "Determination of sensitivity/frequency characteristics of local telephone systems".
- [6] Recommendation ITU-T P.79: "Calculation of loudness ratings for telephone sets".
- [7] Recommendation ITU-T P.310: "Transmission characteristics for telephone band (300-3400 Hz) digital telephones".

- [8] Recommendation ITU-T P.340: "Transmission characteristics and speech quality parameters of hands-free terminals".
- [9] Recommendation ITU-T P.380: "Electro-acoustic measurements on headsets".
- [10] Recommendation ITU-T P.501 (2012): "Test signals for use in telephony".
- [11] Recommendation ITU-T P.502: "Objective test methods for speech communication systems using complex test signals".
- [12] Recommendation ITU-T P.581: "Use of head and torso simulator (HATS) for hands-free terminal testing".
- [13] Recommendation ITU-T G.122: "Influence of national systems on stability and talker echo in international connections".
- [14] IEC 61260-1: "Electroacoustics - Octave-band and fractional-octave-band filters. - Part 1: Specification".
- [15] IEC 61672-1: "Electroacoustics - Sound level meters - Part 1: Specifications".
- [16] ETSI TS 126 171: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); AMR speech codec, wideband; General description (3GPP TS 26.171)".
- [17] Recommendation ITU-T G.729.1: "G.729 based Embedded Variable bit-rate coder: An 8-32 kbit/s scalable wideband coder bitstream interoperable with G.729".
- [18] Recommendation ITU-T G.711: "Pulse code modulation (PCM) of voice frequencies".
- [19] Recommendation ITU-T G.726: "40, 32, 24, 16 kbit/s Adaptive Differential Pulse Code Modulation (ADPCM)".
- [20] Recommendation ITU-T G.729: "Coding of speech at 8 kbit/s using conjugate-structure algebraic-code-excited linear prediction (CS-ACELP)".
- [21] ETSI TS 146 060: "Digital cellular telecommunications system (Phase 2+); (GSM); Enhanced Full Rate (EFR) speech transcoding (3GPP TS 46.060)".
- [22] ETSI TS 146 010: "Digital cellular telecommunications system (Phase 2+); (GSM); Full rate speech; Transcoding (3GPP TS 46.010)".
- [23] Recommendation ITU-T P.863: "Perceptual objective listening quality prediction".
- [24] Recommendation ITU-T P.863.1: "Application Guide for Recommendation ITU-T P.863".
- [25] ETSI TS 103 106: "Speech and multimedia Transmission Quality (STQ); Speech quality performance in the presence of background noise: Background noise transmission for mobile terminals-objective test methods".
- [26] ETSI TS 103 224: "Speech and multimedia Transmission Quality (STQ); A sound field reproduction method for terminal testing including a background noise database".
- [27] Recommendation ITU-T P.1010: "Fundamental voice transmission objectives for VoIP terminals and gateways".
- [28] ETSI TS 126 441: "Universal Mobile Telecommunications System (UMTS); LTE; EVS Codec General Overview (3GPP TS 26.441)".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EG 201 377-1: "Speech and multimedia Transmission Quality (STQ); Specification and measurement of speech transmission quality; Part 1: Introduction to objective comparison measurement methods for one-way speech quality across networks".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

artificial ear: device for the calibration of earphones incorporating an acoustic coupler and a calibrated microphone for the measurement of the sound pressure and having an overall acoustic impedance similar to that of the median adult human ear over a given frequency band

codec: combination of an analogue-to-digital encoder and a digital-to-analogue decoder operating in opposite directions of transmission in the same equipment

diffuse field equalization: equalization of the HATS sound pick-up, equalization of the difference, in dB, between the spectrum level of the acoustic pressure at the ear Drum Reference Point (DRP) and the spectrum level of the acoustic pressure at the HATS Reference Point (HRP) in a diffuse sound field with the HATS absent by applying the reverse nominal curve of table 3 of Recommendation ITU-T P.58 [4]

echo loss: semi-loop loss averaged with 1/f power weighting over the telephone band, in accordance with Recommendation ITU-T G.122 [13], clause 4

Head And Torso Simulator (HATS) for telephonometry: manikin extending downward from the top of the head to the waist, designed to simulate the sound pick-up characteristics and the acoustic diffraction produced by a median human adult and to reproduce the acoustic field generated by the human mouth

Mouth Reference Point (MRP): measurement point on axis and 25 mm in front of the lip plane of a mouth simulator

nominal setting of the volume control: setting of receive volume control of a device, which obtains a RLR value close to 2 dB

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AM-FM	Amplitude Modulation - Frequency Modulation
AMR-NB	Adaptive Multi-Rate - NarrowBand
CDMA	Code Division Multiple Access
CS	Composite Source
CSS	Composite Source Signal
D	D-Value of Terminal
DECT	Digital Enhanced Cordless Telecommunications
DRP	ear Drum Reference Point
DUT	Device Under Test
EC	Echo Cancellation
ECRP	Earcap reference point
EL	Echo Loss
ERP	Ear Reference Point
EVS-NB	Enhanced Voice Services - NarrowBand
FFT	Fast Fourier Transform
G-MOS	Global Mean Opinion Score

G-MOS-LQOn	Overall transmission quality narrowband
GSM	Global Service for Mobile communication
HATS	Head And Torso Simulator
HRP	HATS Reference Point
IEC	International Electrotechnical Commission
ITU-T	International Telecommunications Union - Telecom
LQO	Listening Quality Objective
LR	Loudness Rating
LTE	Long Term Evolution (3GPP)
MOS	Mean Opinion Score
MRP	Mouth Reference Point
N-MOS	Noise Mean Opinion Score
N-MOS-LQOn	Transmission quality of the background noise narrowband
OTT	Over The Top
PLC	Packet Loss Concealment
PN	Pink Noise
POI	Point Of Interconnect
QoS	Quality of Service
RF	Radio Frequency
RLR	Receive Loudness Rating
SLR	Send Loudness Rating
S-MOS	Speech Mean Opinion Score
S-MOS-LQOn	Transmission quality of the speech narrowband
STD	Standard (handset position)
STMR	SideTone Masking Rating
TCL	Terminal Coupling Loss
TCLw	Terminal Coupling Loss (weighted)
TOSQA	Telecommunications Objective Speech Quality Assessment
UE	User Equipment
UMTS	Universal Mobile Telecommunications System
VAD	Voice Activity Detection
VoLTE	Voice over LTE
WIFI	Wireless Fidelity
WIMAX™	Worldwide Interoperability Microwave Access

4 Configurations and interfaces

4.0 Introduction

The present document is intended to be applicable for different wireless access networks and for additional radio links.

4.1 Access networks

The present document applies to any wireless terminal whatever the network access, e.g. GSM, UMTS, VoLTE, DECT, Bluetooth®, WIFI, WIMAX™, CDMA.


4.2 Additional (radio) links between the terminal and external electroacoustical devices

The whole terminal may include additional (radio) links. The most of the requirements and test methods apply to the whole terminal. Specific requirements and test methods on additional links are for further study.

5 Test Configurations

5.1 Set-up interface

The generic schematic as defined in figure 5.1-1 is applicable to any wireless link.

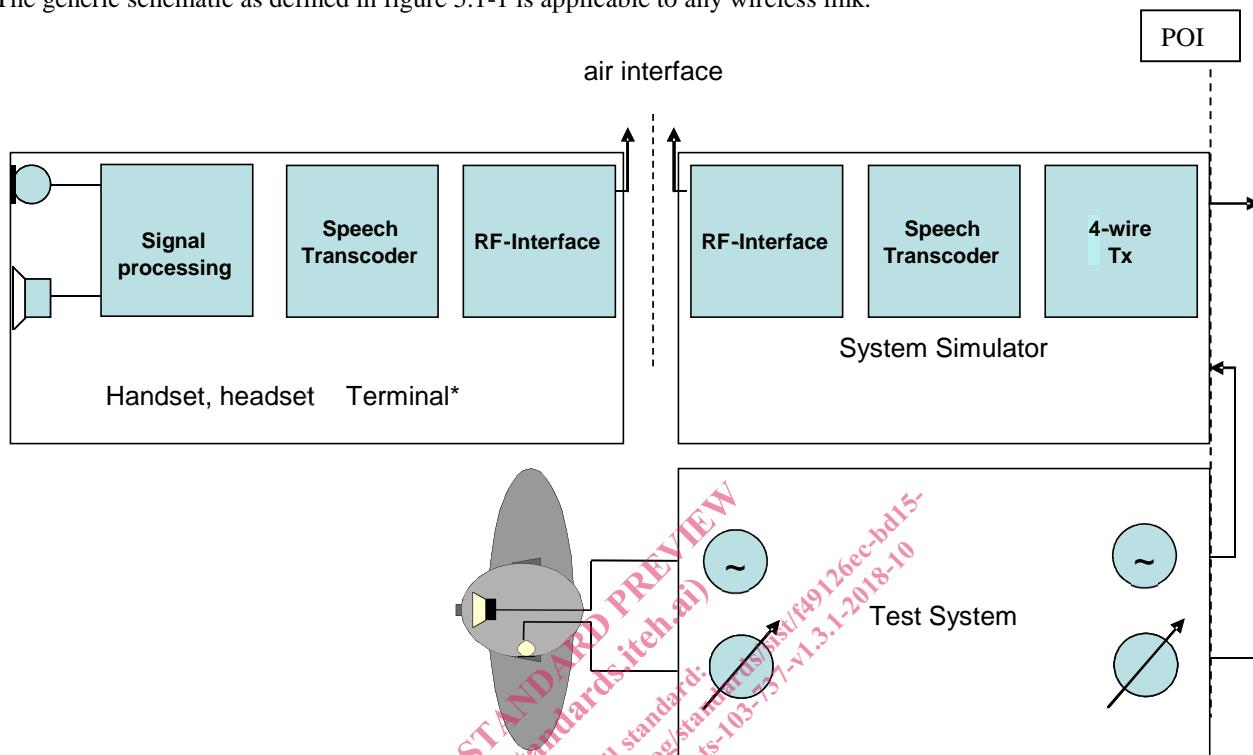

NOTE: The "whole" terminal includes all the components from "RF interface" to the transducers and may include an additional (radio) link. The air interface considered in the figure is not the additional radio link.

Figure 5.1-1: Set-up interface

5.2 Set-up for terminals

5.2.0 General

The acoustical access to terminals is the most realistic simulation of the "average" subscriber. This can be made by using HATS (Head And Torso Simulator) with appropriate ear simulation and appropriate means to fix handset and headset terminals in a realistic and reproducible way to the HATS. HATS is described in Recommendation ITU-T P.58 [4], appropriate ears are described in Recommendation ITU-T P.57 [3] (type 3.3 and type 3.4 ear), a proper positioning of handsets under realistic conditions is to be found in Recommendation ITU-T P.64 [5].

The preferred way of testing a terminal is to connect it to a network simulator with exact defined settings and access points. The test sequences are fed in either electrically, using a reference codec or using the direct signal processing approach and acoustically using the HATS.

When a coder with variable bit rate is used for testing terminal electroacoustical parameters, the bit rate giving the best characteristics or the most commonly used should be selected, e.g.:

- AMR-NB (ETSI TS 126 171 [16]): 12,2 kbit/s;
- Recommendation ITU-T G.729.1 [17]: 32 kbit/s.

5.2.1 Setup for handsets and headsets

When using a handset telephone the handset is placed in the HATS position as described in Recommendation ITU-T P.64 [5]. The artificial mouth shall be conform with Recommendation ITU-T P.58 [4]. The artificial ear shall be conform with Recommendation ITU-T P.57 [3], either type 3.3 or type 3.4 ears shall be used. In case of testing a flat handset (e.g. smartphone) with artificial ear of:

- Type 3.4, the *flat handset position* according to Annex D.3 of Recommendation ITU-T P.64 [5] shall be used ($A=0^\circ$, $B=5^\circ$ and $C=0^\circ$).
- Type 3.3, the *alternative handset position* according to Annex E.2 of Recommendation ITU-T P.64 [5] shall be used with the definition $A=0^\circ$, $B=5^\circ$ and $C=0^\circ$. This aligns measurements using artificial ears of type 3.3 and 3.4, where the flat handset position is explicitly specified (Annex D.3 of Recommendation ITU-T P.64 [5]).

Unless stated otherwise, the application force of 8N is used for handset testing. No application force is used for headset.

Recommendations for positioning headsets are given in Recommendation ITU-T P.380 [9]. If not stated otherwise headsets shall be placed in their recommended wearing position. Further information about setup and the use of HATS can be found in Recommendation ITU-T P.380 [9].

Unless stated otherwise if a volume control is provided the setting is chosen such that the nominal RLR is met as close as possible.

5.2.2 Setup of variable echo path

The handset is positioned $d = 3$ cm above a horizontal hard surface, facing the surface with speaker and microphone. The surface shall be at least 35×35 cm. The handset is fixed like a pendulum with a non-elastic cord 3 cm above the centre of the horizontal surface, see figure 5.2.2-1. The pivot is 55 ± 1 cm above the hard plate.

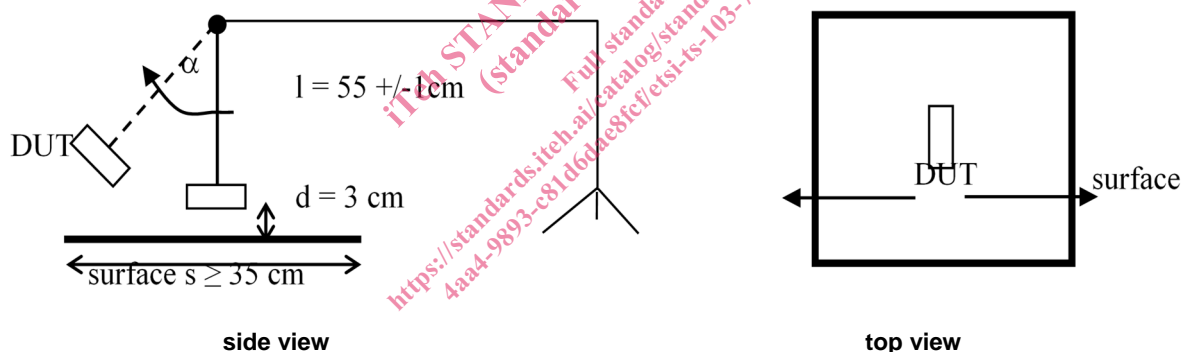


Figure 5.2.2-1: Positioning of handset under test

The "handset-pendulum" is displaced at least to the edge of the hard surface. The test signal playback shall start with the release of the displaced handset under test.

For headsets the same measurement arrangement is used as described above. However, it has to be assured that the echo path (audio path between speaker output and microphone input) changes significantly. If the pendular motion across the base surface is not producing a sufficient change in echo path, another hard surface perpendicular to the base surface can be added. The dimension and position of the additional surface should be chosen such that it is positioned within the echo path when crossed by the pendulous headset but not within the echo path when the headset reaches the turning point of the pendulous motion. At the lowest point of pendular motion, the headset speaker and microphone should not exceed a distance of 3 cm from either of the surfaces.

NOTE: Depending on the geometry of the headset (monaural / binaural, microphone integrated into earpiece/earplug with microphone on short arm / microphone on long arm) a stable pendular motion has to be established. This may require two cords fixed with respect to the headset's balance point in order to avoid tumbling motion. Alternatively, the headset may be attached to a fixed radial arm to achieve a stable pendular motion.

Figure 5.2.2-2 shows an exemplary setup for a binaural headset with long microphone arm and vertical surface to increase echo path variation by changing the coupling between speaker and microphone during pendular motion. During one pendular period, the DUT is exposed to four sudden changes in echo path when passing the vertical surface.

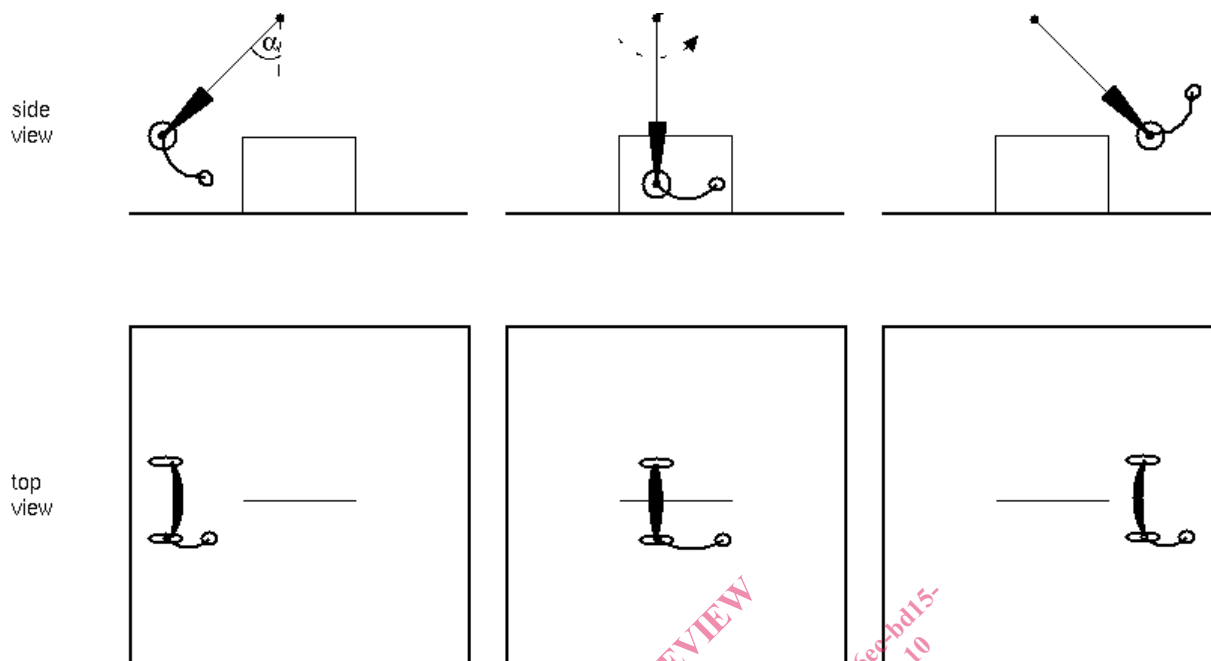


Figure 5.2.2-2: Example for positioning of a headset under test

5.2.3 Setup for testing positional robustness of handsets

In order to investigate the robustness of certain measurements against non-default positions as described in clause 5.2.1, three modified positions are defined for the sending and receiving side. Tables 5.2.3-1 and 5.2.3-2 provide a description of these positions, which are derived from typical user behaviour. Figure 5.2.3-1 illustrates the different axes and coordinate system. More detailed explanations are provided in Recommendation ITU-T P.64 [5]. All measurements regarding positioning are only applicable for handset testing.

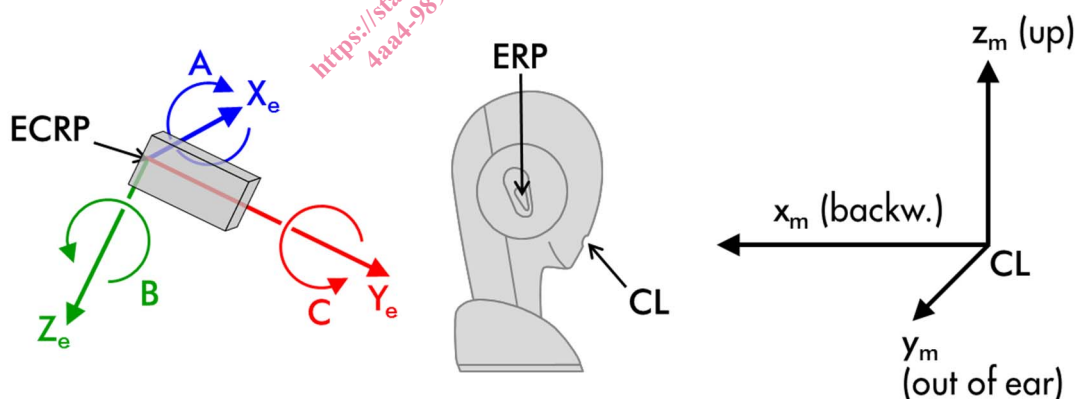


Figure 5.2.3-1: Schematic overview over positioning coordinate system

Table 5.2.3-1 provides the different angles for the positions in sending direction. With these shifts, distance and direction between MRP and microphone input of the DUT is varied.