



**Digital cellular telecommunications system (Phase 2+) (GSM);
Universal Mobile Telecommunications System (UMTS);**

LTE;

**AT command set for User Equipment (UE)
(3GPP TS 27.007 version 12.12.0 Release 12)**



ReferenceRTS/TSGC-0127007vcc0

Keywords

GSM,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.

All rights reserved.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and LTE™ are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	9
1 Scope	10
2 References	10
3 Definitions and abbreviations.....	17
3.1 Definitions	17
3.2 Abbreviations	17
4 AT command syntax	18
4.0 General	18
4.1 Command line	18
4.2 Information responses and result codes.....	19
4.3 ITU-T Recommendation V.250 [14] TE-TA interface commands	19
5 General commands.....	20
5.0 General	20
5.1 Request manufacturer identification +CGMI	20
5.2 Request model identification +CGMM	21
5.3 Request revision identification +CGMR	21
5.4 Request product serial number identification +CGSN	22
5.5 Select TE character set +CSCS	23
5.6 Request international mobile subscriber identity +CIMI	24
5.7 Multiplexing mode +CMUX	25
5.8 ITU-T Recommendation V.250 [14] generic TA control commands.....	27
5.9 PCCA STD-101 [17] select wireless network +WS46.....	27
5.10 Informative examples	28
6 Call control commands and methods	29
6.0 General	29
6.1 Select type of address +CSTA.....	29
6.2 ITU-T Recommendation V.250 [14] dial command D	30
6.3 Direct dialling from phonebooks.....	30
6.4 Call mode +CMOD	32
6.4A Voice call mode +CVMOD.....	32
6.5 Hangup call +CHUP.....	33
6.6 Alternating mode call control method	33
6.7 Select bearer service type +CBST.....	35
6.8 Radio link protocol +CRLP.....	37
6.9 Service reporting control +CR.....	38
6.10 Extended error report +CEER	39
6.11 Cellular result codes +CRC	40
6.12 HSCSD device parameters +CHSD	41
6.13 HSCSD transparent call configuration +CHST	42
6.14 HSCSD non-transparent call configuration +CHSN	43
6.15 HSCSD current call parameters +CHSC	44
6.16 HSCSD parameters report +CHSR	44
6.17 HSCSD automatic user initiated upgrading +CHSU.....	45
6.18 HSCSD non-transparent asymmetry configuration +CHSA	46
6.19 Single numbering scheme +CSNS	46
6.20 Voice hangup control +CVHU.....	47
6.21 CCITT V.120 [36] rate adaption protocol +CV120	48
6.22 Settings date format +CSDF.....	49
6.23 Silence command +CSIL.....	50

6.24	Settings time format +CSTF.....	50
6.25	ITU-T Recommendation V.250 [14] call control commands.....	52
6.26	ITU-T Recommendation V.250 [14] data compression commands	52
6.27	Initiate eCall +CECALL	52
6.28	Informative examples	53
7	Network service related commands	54
7.0	General	54
7.1	Subscriber number +CNUM	54
7.2	Network registration +CREG	55
7.3	PLMN selection +COPS	57
7.4	Facility lock +CLCK	59
7.5	Change password +CPWD	61
7.6	Calling line identification presentation +CLIP.....	61
7.7	Calling line identification restriction +CLIR.....	63
7.8	Connected line identification presentation +COLP.....	64
7.9	Called line identification presentation +CDIP.....	65
7.10	Closed user group +CCUG.....	66
7.11	Call forwarding number and conditions +CCFC.....	67
7.12	Call waiting +CCWA	68
7.13	Call related supplementary services +CHLD	70
7.14	Call deflection +CTFR	71
7.15	Unstructured supplementary service data +CUSD	72
7.16	Advice of charge +CAOC	73
7.17	Supplementary service notifications +CSSN	74
7.18	List current calls +CLCC	76
7.19	Preferred PLMN list +CPOL.....	77
7.20	Selection of preferred PLMN list +CPLS.....	79
7.21	Read operator names +COPN	80
7.22	eMLPP priority registration and interrogation +CAEMLPP	80
7.23	eMLPP subscriptions +CPPS	81
7.24	Fast call setup conditions +CFCS.....	81
7.25	Automatic answer for eMLPP service +CAAP	82
7.26	User to user signalling service 1 +CUUS1	82
7.27	Preferred network indication +CPNET	84
7.28	Preferred network status +CPNSTAT	85
7.29	Current packet switched bearer +CPSB	85
7.30	Calling name identification presentation +CNAP	87
7.31	Connected line identification restriction status +COLR.....	88
7.32	Service specific access control restriction status +CSSAC	88
7.33	Network emergency bearer services support +CNEM	90
7.34	Enhanced closed user group +CECUG	91
7.35	Communication forwarding number and conditions with URI support +CCFCU	93
7.36	Message waiting indication control +CMWI	94
7.37	Session start and stop for smart congestion mitigation +CSCM	95
7.38	Power Saving Mode Setting +CPSMS	96
7.39	Informative examples	97
8	Mobile termination control and status commands.....	99
8.0	General	99
8.1	Phone activity status +CPAS.....	100
8.2	Set phone functionality +CFUN	101
8.3	Enter PIN +CPIN	102
8.4	Battery charge +CBC	104
8.5	Signal quality +CSQ.....	104
8.6	Mobile termination control mode +CMEC	105
8.7	Keypad control +CKPD	106
8.8	Display control +CDIS.....	107
8.9	Indicator control +CIND	108
8.10	Mobile termination event reporting +CMER	109
8.11	Select phonebook memory storage +CPBS.....	112
8.12	Read phonebook entries +CPBR.....	113

8.13	Find phonebook entries +CPBF	114
8.14	Write phonebook entry +CPBW	117
8.15	Clock +CCLK	118
8.16	Alarm +CALA.....	119
8.17	Generic SIM access +CSIM	120
8.18	Restricted SIM access +CRSM	121
8.19	Secure control command +CSCC.....	122
8.20	Alert sound mode +CALM.....	123
8.21	Ringer sound level +CRSL.....	123
8.22	Vibrator mode +CVIB.....	124
8.23	Loudspeaker volume level +CLVL	125
8.24	Mute control +CMUT	125
8.25	Accumulated call meter +CACM.....	126
8.26	Accumulated call meter maximum +CAMM.....	126
8.27	Price per unit and currency table +CPUC	127
8.28	Call meter maximum event +CCWE.....	127
8.29	Power class +CPWC	128
8.30	Set language +CLAN	129
8.31	Language event +CLAE.....	130
8.32	Set greeting text +CSGT	130
8.33	Set voice mail number +CSVN	131
8.34	Ring melody control +CRMC	132
8.35	Ring melody playback +CRMP.....	133
8.36	Master reset +CMAR	133
8.37	List all available AT commands +CLAC	134
8.38	Delete alarm +CALD	134
8.39	Postpone or dismiss an alarm +CAPD	135
8.40	Automatic time zone update +CTZU	135
8.41	Time zone reporting +CTZR.....	136
8.42	Enter protocol mode+CPROT	137
8.43	Generic UICC logical channel access +CGLA	138
8.44	Restricted UICC logical channel access +CRLA	139
8.45	Open logical channel +CCHO.....	140
8.46	Close logical channel +CCHC.....	141
8.47	EAP authentication +CEAP	141
8.48	EAP retrieve parameters +CERP.....	143
8.49	UICC application discovery +CUAD.....	143
8.50	Mobile originated location request +CMOLR.....	144
8.51	Backlight +CBKLT	148
8.52	Command touch screen action +CTSA	149
8.53	Command screen orientation +CSO	151
8.54	Command screen size +CSS.....	153
8.54A	Command display screen boundary +CDSB	154
8.55	Positioning control +CPOS	154
8.56	Positioning reporting +CPOSR	170
8.57	Mobile terminated location request notification +CMTLR.....	171
8.58	Mobile terminated location request disclosure allowance +CMTLRA	172
8.59	Battery capacity +CBCAP.....	173
8.60	Battery connection status +CBCON.....	174
8.61	Battery charger status +CBCHG	174
8.62	Printing IP address format +CGPIAF.....	175
8.63	IMS single radio voice call continuity +CISRVCC	177
8.64	IMS network reporting +CIREP.....	177
8.65	Remaining PIN retries +CPINR	178
8.66	Set card slot +CSUS.....	179
8.67	Emergency numbers +CEN.....	180
8.68	Availability for voice calls with IMS +CAVIMS.....	181
8.69	Extended signal quality +CESQ.....	181
8.70	Primary notification event reporting +CPNER	183
8.71	IMS registration information +CIREG.....	184
8.72	Availability for SMS using IMS +CASIMS.....	185
8.73	Monitor of current calls +CMCCS	186

8.74	List of current calls +CLCCS	192
8.75	Supported radio accesses +CSRA	195
8.76	Circuit switched fallback +CCSFB	197
8.77	Informative examples	198
9	Mobile termination errors.....	202
9.1	Report mobile termination error +CMEE.....	202
9.1A	Report mobile originated location request error +CMOLRE	202
9.1B	Report network error codes +CNEC	203
9.2	Mobile termination error result code +CME ERROR	204
9.2.0	General.....	204
9.2.1	General errors	205
9.2.2	GPRS and EPS-related errors	206
9.2.2.1	Errors related to a failure to perform an attach.....	206
9.2.2.2	Errors related to a failure to activate a context.....	206
9.2.2.3	Errors related to a failure to disconnect a PDN.....	207
9.2.2.4	Other GPRS errors	207
9.2.3	VBS, VGCS and eMLPP-related errors.....	207
9.3	Mobile termination error result code +CMOLRE	207
9.3.1	General.....	207
9.3.2	Errors	208
9.4	Informative examples	208
10	Commands for packet domain.....	208
10.0	General	208
10.1	Commands specific to MTs supporting the packet domain.....	209
10.1.0	General remark about EPS bearer contexts and PDP contexts	209
10.1.1	Define PDP context +CGDCONT	210
10.1.2	Define secondary PDP context +CGDSCONT	213
10.1.3	Traffic flow template +CGTFT	215
10.1.4	Quality of service profile (requested) +CGQREQ.....	218
10.1.5	Quality of service profile (minimum acceptable) +CGQMIN	220
10.1.6	3G quality of service profile (requested) +CGEQREQ	221
10.1.7	3G quality of service profile (minimum acceptable) +CGEQMIN.....	224
10.1.8	3G quality of service profile (negotiated) +CGEQNEG	228
10.1.9	PS attach or detach +CGATT	230
10.1.10	PDP context activate or deactivate +CGACT	230
10.1.11	PDP context modify +CGCMOD.....	231
10.1.12	Enter data state +CGDATA	232
10.1.13	Configure local octet stream PAD parameters +CGCLOSP (Obsolete)	234
10.1.14	Show PDP address(es) +CGPADDR.....	234
10.1.15	Automatic response to a network request for PDP context activation +CGAUTO	235
10.1.16	Manual response to a network request for PDP context activation +CGANS	236
10.1.17	GPRS mobile station class +CGCLASS.....	237
10.1.18	Configure local triple-X PAD parameters +CGCLPAD (GPRS only) (Obsolete)	238
10.1.19	Packet domain event reporting +CGEREP	238
10.1.20	GPRS network registration status +CGREG	242
10.1.21	Select service for MO SMS messages +CGSMS.....	244
10.1.22	EPS network registration status +CEREG	245
10.1.23	PDP context read dynamic parameters +CGCONTRDP	247
10.1.24	Secondary PDP context read dynamic parameters +CGSCONTRDP	249
10.1.25	Traffic flow template read dynamic parameters +CGTFTRDP	250
10.1.26	Define EPS quality of service +CGEQOS	252
10.1.27	EPS quality of service read dynamic parameters +CGEQOSRDP	253
10.1.28	UE modes of operation for EPS +CEMODE.....	254
10.1.29	Delete non-active PDP contexts +CGDEL	255
10.1.30	Signalling connection status +CSCON	255
10.1.31	Define PDP context authentication parameters +CGAUTH.....	256
10.1.32	Initial PDP context activation +CIPCA	257
10.1.33	No more PS data +CNMPSD.....	258
10.1.34	UE's usage setting for EPS +CEUS	258
10.1.35	UE's Voice Domain Preference E-UTRAN +CEVDP	259

10.1.36	UE's Voice Domain Preference UTRAN +CVDP	260
10.1.37	UE's Mobility Management IMS Voice Termination +CMMIVT	260
10.1.38	Power Preference Indication for EPS +CEPPI	261
10.2	Modem compatibility commands	261
10.2.0	General	261
10.2.1	MT originated PDP context activation	261
10.2.1.0	General	261
10.2.1.1	Request packet domain service 'D'	262
10.2.1.2	Request packet domain IP service 'D'	263
10.2.2	Network requested PDP context activation	264
10.2.2.0	General	264
10.2.2.1	Automatic response to a network request for PDP context activation 'S0'	264
10.2.2.2	Manual acceptance of a network request for PDP context activation 'A'	264
10.2.2.3	Manual rejection of a network request for PDP context activation 'H'	264
11	Commands for VGCS and VBS	265
11.0	General	265
11.1	Commands specific to MTs supporting the VGCS and VBS	265
11.1.1	Accept an incoming voice group or voice broadcast call +CAJOIN	265
11.1.2	Reject an incoming voice group or voice broadcast call +CAREJ	266
11.1.3	Leave an ongoing voice group or voice broadcast call +CAHLD	266
11.1.4	Talker access for voice group call +CAPTT	267
11.1.5	Voice group call uplink status presentation +CAULEV	267
11.1.6	List current voice group and voice broadcast calls +CALCC	268
11.1.7	Voice group or voice broadcast call state attribute presentation +CACSP	269
11.1.8	NCH support indication +CANCHEV	270
11.1.9	Originator to dispatcher information +COTDI	271
11.1.10	Short data transmission during ongoing VGCS +CEPTT	272
11.1.11	Group Id prefixes capability +CGIPC	273
11.2	Modem compatibility commands	273
11.2.0	General	273
11.2.1	Request VGCS or VBS service 'D'	273
11.2.2	Termination of an voice group or voice broadcast call 'H'	274
11.3.1	VGCS subscriptions and GId status +CGCS	274
11.3.2	VBS subscriptions and GId status +CBCS	275
11.4	Informative examples	276
12	Commands for USIM application toolkit	276
12.1	General	276
12.2	Commands specific to MTs supporting USAT	277
12.2.1	Read USAT profile +CUSATR	277
12.2.2	Write USAT profile +CUSATW	277
12.2.3	Profile download upon start-up +CUSATD	278
12.2.4	Activate USAT profile +CUSATA	280
12.2.5	Send USAT terminal response +CUSATT	281
12.2.6	Send USAT envelope command +CUSATE	282
12.3	Informative examples	282
13	Commands for enhanced support of dialling	284
13.1	General	284
13.2	Commands for dialling	285
13.2.1	Dial URI +CDU	285
13.2.2	Dial URI from phonebook +CDUP	287
13.2.3	Hangup of current calls +CHCCS	288
13.2.4	Define media profile +CDEFMP	289
13.2.5	Control and modify media description +CCMMD	291
13.3	Informative examples	292
Annex A (normative):	Summary of commands from other standards	296
Annex B (normative):	Summary of result codes	298
Annex C (informative):	Commands from TIA IS-101	300

C.1	Introduction	300
C.2	Commands	301
C.2.1	Select mode +FCLASS	301
C.2.2	Buffer threshold setting +VBT	301
C.2.3	Calling number ID presentation +VCID	302
C.2.4	Receive gain selection +VGR	302
C.2.5	Transmit gain selection +VGT	302
C.2.6	Initialise voice parameters +VIP	303
C.2.7	Inactivity timer +VIT	303
C.2.8	Line selection +VLS	303
C.2.9	Receive data state +VRX	305
C.2.10	Select compression method +VSM	305
C.2.11	DTMF and tone generation +VTS	306
C.2.12	Tone duration +VTD	306
C.2.13	Transmit data state +VTX	307
Annex D (informative):	Bibliography	308
Annex E (informative):	Mobile originated alternating voice/data call example	309
Annex F (informative):	Mobile terminated voice followed by data call example	310
Annex G (informative):	Voice call example	311
Annex H (informative):	Change history	312
History		318

ITeH STANDARD PREVIEW
 (standards.iteh.ai)
 Full standard:
<https://standards.iteh.ai/catalog/standards/sist/6916b44f-b560-42bf-a61b-c5617ea82ad5/etsi-ts-127-007-v12.12.0-2018-04>

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

ETSI STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/6916b44f-b56b-42bf-a61b-c5617ea8aad5/etsi-ts-127-007-v12.12.0-2018-04>

1 Scope

The present document specifies a profile of AT commands and recommends that this profile be used for controlling Mobile Termination (MT) functions and GSM/UMTS network services from a Terminal Equipment (TE) through Terminal Adaptor (TA). The command prefix +C is reserved for Digital Cellular in ITU-T Recommendation V.250 [14]. The present document has also the syntax details used to construct these extended GSM/UMTS commands. Commands from ITU-T Recommendation V.250 [14] and existing digital cellular standards (TIA IS-99 [15] and TIA IS-135 [16]) are used whenever applicable. Some of the new commands are defined such way that they can be easily applied to MT of networks other than GSM/UMTS. ITU-T Recommendation T.31 [11] and ITU-T Recommendation T.32 [12] fax AT commands may be used for GSM/UMTS fax transmission from TE. GSM/UMTS Short Message Service AT commands are defined in 3GPP TS 27.005 [24]. AT commands for GPRS and EPC are defined in clause 10 of this specification. The present document assumes an abstract architecture comprising a TE (e.g. a computer) and a MT interfaced by a TA (see figure 1). The span of control of the defined commands should allow handling of any physical implementation that this abstract architecture may lead to:

- TA, MT and TE as three separate entities;
- TA integrated under the MT cover, and the TE implemented as a separate entity;
- TA integrated under the TE cover, and the MT implemented as a separate entity; and
- TA and MT integrated under the TE cover as a single entity.

The commands described in the present document may be observed on the link between the TE and the TA. However, most of the commands retrieve information about the MT, not about the TA.

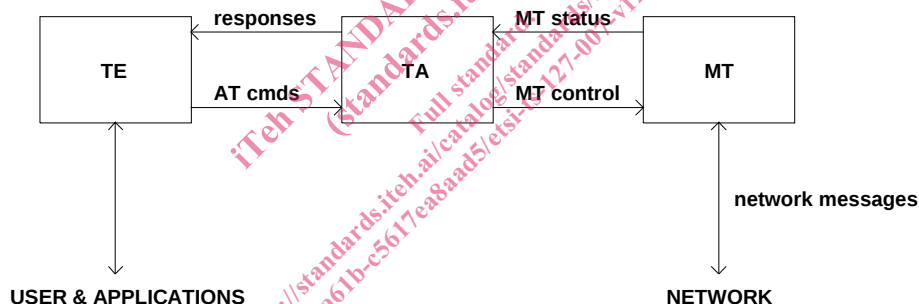


Figure 1: Setup

Interface between TE and TA is intended to operate over existing serial (ITU-T Recommendation V.24) cables, infrared link, and all link types with similar behaviour. For correct operation many of the defined commands require eight bit data and therefore it is recommended that TE-TA link is set to eight bits/ byte mode. (For infrared operation implementation, refer informative references IrDA. For embedding AT commands and data during on-line data state, refer TIA-617/ITU-T V.80.) Interface between TA and MT is dependent on the interface in the MT.

The functional blocks shown in figure 1, using AT commands, shall follow the principles described in the interactions handling framework 3GPP TS 23.227 [63].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.

- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 22.002: "Bearer Services (BS) supported by a GSM Public Land Mobile Network (PLMN)".
- [2] 3GPP TS 22.003: "Teleservices supported by a GSM Public Land Mobile Network (PLMN)".
- [3] 3GPP TS 22.081: "Line identification supplementary services - Stage 1".
- [4] 3GPP TS 22.082: "Call Forwarding (CF) supplementary services - Stage 1".
- [5] 3GPP TS 22.083: "Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 1".
- [6] 3GPP TS 22.088: "Call Barring (CB) supplementary services - Stage 1".
- [7] 3GPP TS 23.003: "Numbering, addressing and identification".
- [8] 3GPP TS 24.008: "Mobile Radio Interface Layer 3 specification; Core Network Protocols- Stage 3".
- [9] GSM MoU SE.13, GSM MoU Permanent Reference Document SE.13: "GSM Mobile Network Codes and Names".
- [10] ITU-T Recommendation E.212: "Identification plan for land mobile stations".
- [11] ITU-T Recommendation T.31: "Asynchronous facsimile DCE control, service class 1".
- [12] ITU-T Recommendation T.32: "Asynchronous facsimile DCE control, service class 2".
- [13] ITU-T Recommendation T.50: "International Reference Alphabet (IRA) (Formerly International Alphabet No. 5 or IA5) - Information technology 7-bit coded character set for information exchange".
- [14] ITU-T Recommendation V.250: "Serial asynchronous automatic dialling and control".
- [15] TIA IS-99: "Data Services Option Standard for Wideband Spread Spectrum Digital Cellular System".
- [16] TIA IS-135: "800 MHz Cellular Systems, TDMA Services, Async Data and Fax".
- [17] PCCA STD-101 Data Transmission Systems and Equipment: "Serial Asynchronous Automatic Dialling and Control for Character Mode DCE on Wireless Data Services".
- [18] 3GPP TS 24.022: "Radio Link Protocol (RLP) for data and telematic services on the Mobile Station - Base Station System (MS - BSS) interface and the Base Station System - Mobile-services Switching Centre (BSS - MSC) interface".
- [19] 3GPP TS 22.030: "Man Machine Interface (MMI) of the Mobile Station (MS)".
- [20] 3GPP TS 45.008: "Radio subsystem link control".
- [21] 3GPP TS 22.085: "Closed User Group (CUG) supplementary services - Stage 1".
- [22] 3GPP TS 22.084: "MultiParty (MPY) supplementary services - Stage 1".
- [23] 3GPP TS 22.090: "Unstructured Supplementary Service Data (USSD) - Stage 1".
- [24] 3GPP TS 27.005: "Use of Data Terminal Equipment - Data Circuit terminating Equipment (DTE - DCE) interface for Short Message Service (SMS) and Cell Broadcast Service (CBS)".
- [25] 3GPP TS 23.038: "Alphabet and language specific information".
- [26] 3GPP TS 22.024: "Description of Charge Advice Information (CAI)".
- [27] 3GPP TS 22.086: "Advice of Charge (AoC) supplementary services - Stage 1".

- [28] 3GPP TS 51.011: "Specification of the Subscriber Identity Module - Mobile Equipment (SIM-ME) interface".
- [29] 3GPP TS 22.034: "High Speed Circuit Switched Data (HSCSD) - Stage 1".
- [30] 3GPP TS 22.091: "Explicit Call Transfer (ECT) supplementary service - Stage 1".
- [31] 3GPP TS 22.072: "Call Deflection (CD) supplementary service - Stage 1".
- [32] ISO/IEC 10646: "Universal Multiple-Octet Coded Character Set (UCS)"; UCS2, 16 bit coding.
- [33] 3GPP TS 22.022: "Personalization of GSM Mobile Equipment (ME) Mobile functionality specification".
- [34] 3GPP TS 27.060: "General requirements on Mobile Stations (MS) supporting General Packet Radio Bearer Service (GPRS)".
- [35] Void.
- [36] CCITT Recommendation V.120: "Support by an ISDN of data terminal equipment with V-Series type interfaces with provision for statistical multiplexing".
- [37] Void.
- [38] 3GPP TS 45.005: "Radio transmission and reception".
- [39] 3GPP TS 29.061: "Interworking between the Public Land Mobile Network (PLMN) supporting GPRS and Packet Data Networks (PDN)".
- [40] 3GPP TS 23.081: "Line identification supplementary services - Stage 2".
- [41] 3GPP TS 27.001: "General on Terminal Adaptation Functions (TAF) for Mobile Stations (MS)".
- [42] 3GPP TS 29.007: "General requirements on interworking between the Public Land Mobile Network (PLMN) and the Integrated Services Digital Network (ISDN) or Public Switched Telephone Network (PSTN)".
- [43] Infrared Data Association; Specification of Ir Mobile Communications (IrMC).
- [44] IrDA Object Exchange Protocol.
- [45] 3GPP TS 27.010: "Terminal Equipment to User Equipment (TE-UE) multiplexer protocol User Equipment (UE)".
- [46] 3GPP TS 23.107: "Quality of Service, Concept and Architecture".
- [47] 3GPP TS 23.060: "General Packet Radio Service (GPRS) Service description; Stage 2".
- [48] Void.
- [49] 3GPP TS 43.068: "Voice Group Call service (VGCS) - Stage 2".
- [50] 3GPP TS 43.069: "Voice Broadcast Service (VBS) - Stage 2".
- [51] Void.
- [52] 3GPP TS 44.068: "Voice Group Call service (VGCS) - Stage 3".
- [53] 3GPP TS 44.069: "Voice Broadcast Service (VBS) - Stage 3".
- [54] 3GPP TS 22.067: "enhanced Multi-Level Precedence and Pre-emption service (eMLPP) - Stage 1".
- [55] 3GPP TS 42.068: "Voice Group Call service (VGCS) - Stage 1".
- [56] 3GPP TS 42.069: "Voice Broadcast Service (VBS) - Stage 1".
- [57] Void.