
**Geometrical product specifications
(GPS) — ISO code system for tolerances
on linear sizes —**

**Part 2:
Tables of standard tolerance classes and
limit deviations for holes and shafts**

iTeh STANDARD PREVIEW

(standards.iteh.ai)

*Spécification géométrique des produits (GPS) — Système de
codification ISO pour les tolérances sur les tailles linéaires —*

*Partie 2: Tableaux des classes de tolérance normalisées et des écarts
limites des alésages et des arbres*

<https://standards.iteh.ai/catalog/standards/sist/ea02e880-259a-40c5-9a58-022dc3cb4694/iso-286-2-2010>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 286-2:2010

<https://standards.iteh.ai/catalog/standards/sist/ea02e880-259a-40c5-9a58-022dc3cb4694/iso-286-2-2010>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

| | |
|---|-----------|
| Foreword | iv |
| Introduction | v |
| 1 Scope | 1 |
| 2 Normative references | 3 |
| 3 Standard tolerances | 3 |
| 4 Limit deviations for holes | 4 |
| 5 Limit deviations for shafts | 4 |
| 6 Presentation of Tables 2 to 32 | 4 |
| Annex A (informative) Graphical review of tolerance intervals for holes and shafts | 45 |
| Annex B (informative) Relationship to the GPS matrix model | 50 |
| Bibliography | 52 |

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 286-2:2010

<https://standards.iteh.ai/catalog/standards/sist/ea02e880-259a-40c5-9a58-022dc3cb4694/iso-286-2-2010>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 286-2 was prepared by Technical Committee ISO/TC 213, *Dimensional and geometrical product specifications and verification*.

This second edition cancels and replaces the first edition (ISO 286-2:1988), which has been technically revised. It also incorporates the Technical Corrigendum ISO 286-2:1988/Cor.1:2006.

ISO 286 consists of the following parts, under the general title *Geometrical product specifications (GPS) — ISO code system for tolerances on linear sizes*:

- *Part 1: Basis of tolerances, deviations and fits*
- *Part 2: Tables of standard tolerance classes and limit deviations for holes and shafts*

Introduction

This part of ISO 286 is a geometrical product specification (GPS) standard and is to be regarded as a general GPS standard (see ISO/TR 14638). It influences chain links 1 and 2 of the chain of standards on size in the general GPS matrix.

For more detailed information on the relationship of this part of ISO 286 to the GPS matrix model, see Annex B.

The need for limits and fits for machined workpieces was brought about mainly by the requirement for interchangeability between mass-produced parts and the inherent inaccuracy of manufacturing methods, coupled with the fact that “exactness” of size was found to be unnecessary for most workpiece features. In order that the fit function could be satisfied, it was found sufficient to manufacture a given workpiece so that its size lay within two permissible limits, i.e. a tolerance, this being the variation in size acceptable in manufacture while ensuring the functional fit requirements of the product.

Similarly, where a specific fit condition is required between mating features of two different workpieces, it is necessary to ascribe an allowance, either positive or negative, to the nominal size to achieve the required clearance or interference. ISO 286 gives the internationally accepted code system for tolerances on linear sizes. It provides a system of tolerances and deviations suitable for two types of feature: “cylinder” and “two parallel opposite surfaces”. The main intention of this code system is the fulfilment of the function fit.

The terms “hole”, “shaft” and “diameter” are used to designate the types of feature of cylinders (e.g. for the tolerancing of the diameter of a hole or shaft). For simplicity, they are also used for two parallel opposite surfaces (e.g. for the tolerancing of the thickness of a key or the width of a slot).

The pre-condition for the application of the ISO code system for tolerances on linear sizes for the features forming a fit is that the nominal sizes of the hole and the shaft are identical.

The previous edition of ISO 286-2 (published in 1988) had the envelope criterion as the default association criterion for the size of a feature; however, ISO 14405-1 changes this default association criterion to the two-point size criterion. This means that form is no longer controlled by the default specification of size.

In many cases, the diameter tolerances specified in this part of ISO 286 are not sufficient for effective control of the intended function of the fit. The envelope criterion specified in ISO 14405-1 may be required. In addition, the use of geometrical form tolerances and surface texture requirements may improve the control of the intended function.

A general graphical representation of the relationship between the respective tolerance classes and their deviations is given in Annex A.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 286-2:2010

<https://standards.iteh.ai/catalog/standards/sist/ea02e880-259a-40c5-9a58-022dc3cb4694/iso-286-2-2010>

Geometrical product specifications (GPS) — ISO code system for tolerances on linear sizes —

Part 2: Tables of standard tolerance classes and limit deviations for holes and shafts

1 Scope

This part of ISO 286 gives values of the limit deviations for commonly used tolerance classes for holes and shafts calculated from the tables given in ISO 286-1. This part of ISO 286 covers values for the upper limit deviations ES (for holes) and es (for shafts), and the lower limit deviations EI (for holes) and ei (for shafts) (see Figures 1 and 2).

NOTE In the tables of limit deviations, the values of the upper limit deviation ES or es are shown above the values of the lower limit deviation EI or ei except for tolerance classes JS and js which are symmetrical about the zero line.


The ISO system for tolerances on linear size provides a system of tolerances and deviations suitable for features of the following types:

- [ISO 286-2:2010](https://standards.iteh.ai/catalog/standards/sist/ea02e880-259a-40c5-9a58-022dc3cb4694/iso-286-2-2010)
(standards.iteh.ai)
- a) cylinders; <https://standards.iteh.ai/catalog/standards/sist/ea02e880-259a-40c5-9a58-022dc3cb4694/iso-286-2-2010>
 - b) two parallel opposite surfaces.

For simplicity, and also because of the importance of cylindrical workpieces of circular section, only these are referred to explicitly. It should be clearly understood, however, that the tolerances and deviations given in this part of ISO 286 equally apply to workpieces of other than circular sections.

In particular, the term “hole” or “shaft” is used to designate features of the cylinder type (e.g. for the tolerancing of the diameter of a hole or shaft) and, for simplicity, these terms are also used for two parallel opposite surfaces (e.g. for the tolerancing of the thickness of a key or the width of a slot).

For further information on terminology, symbols, the basis of the system, etc., see ISO 286-1.

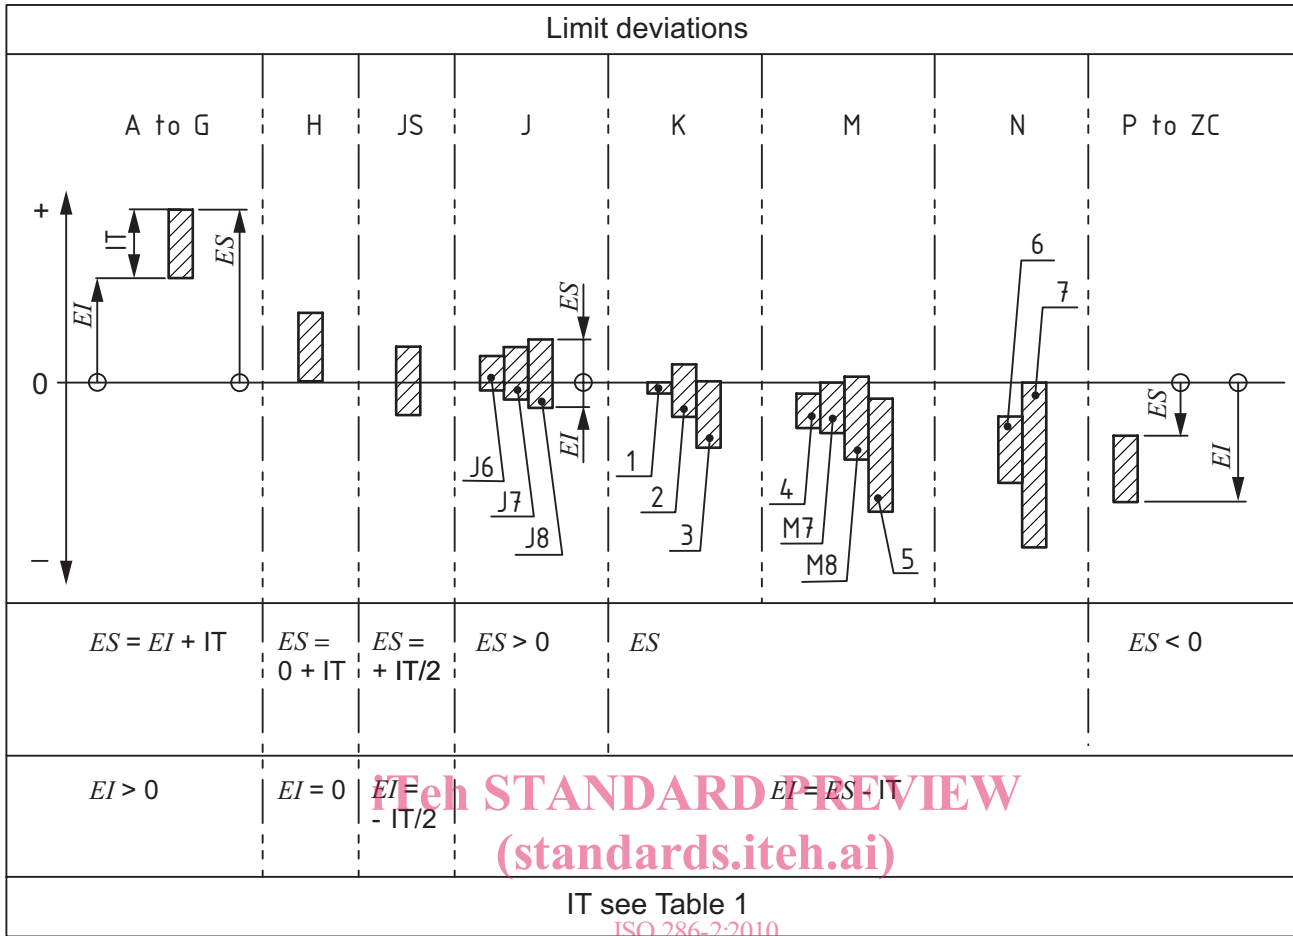


Iteh STANDARD PREVIEW
(standards.iteh.ai)

Key

- 1 K1 to K3, and also K4 to K8 for sizes for which $\text{—} < \text{nominal size} \leq 3 \text{ mm}$ (for the significance of the dash, see e.g. footnote “b” to Table 2)
- 2 K4 to K8 for sizes for which $3 \text{ mm} < \text{nominal size} \leq 500 \text{ mm}$
- 3 K9 to K18
- 4 M1 to M6
- 5 M9 to M18
- 6 N1 to N8
- 7 N9 to N18

Figure 1 — Upper and lower limit deviations for holes (internal features)

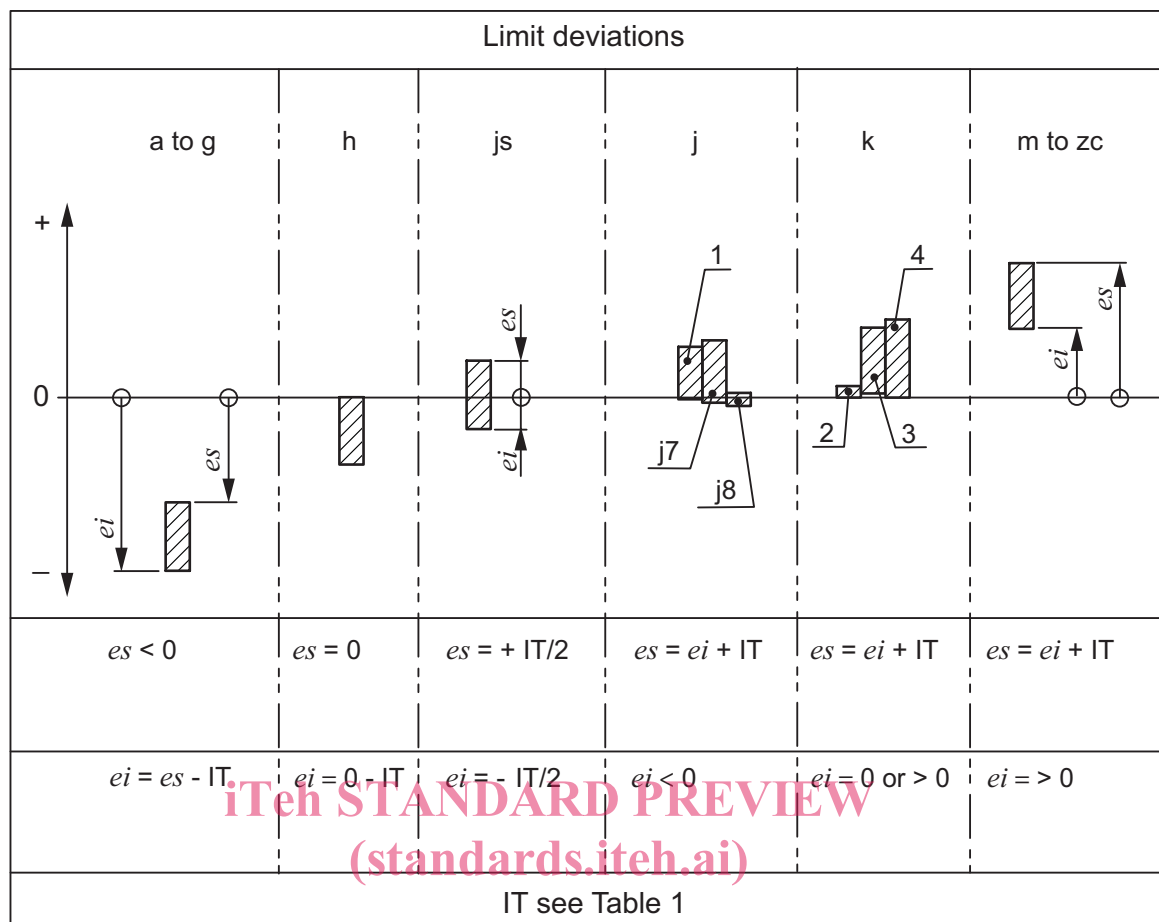

ISO 286-2:2010

Key

- 1 j5, j6
- 2 k1 to k3, and k4 to k7 for sizes for which $— < \text{nominal size} \leq 3 \text{ mm}$ (for the significance of the dash, see e.g. footnote “b” to Table 2)
- 3 k4 to k7 for sizes for which $3 \text{ mm} < \text{nominal size} \leq 500 \text{ mm}$
- 4 k8 to k18

Figure 2 — Upper and lower limit deviations for shafts (external features)

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 286-1:2010, *Geometrical product specifications (GPS) — ISO code system for tolerances of linear sizes — Part 1: Basis of tolerances, deviations and fits*

3 Standard tolerances

The values of standard tolerance grades IT01 to IT18, inclusive, are given in Table 1.

4 Limit deviations for holes

A synoptic representation of the tolerance classes for holes, as given in this part of ISO 286, is shown in Figures 3 and 4.

Attention is drawn to the fact that the tolerance classes shown in Figures 3 and 4, and their limit deviations given in Tables 2 to 16, are not intended to give detailed directives on the selection of tolerance classes for any purpose. Recommendations for the selection of tolerance classes are given in ISO 286-1:2010, Subclause 4.4 and Clause 5.

NOTE Some tolerance classes are only provided for a restricted number of nominal size ranges. For further information, see 6.1.

5 Limit deviations for shafts

A synoptic representation of the tolerance classes for shafts, as given in this part of ISO 286, is shown in Figures 5 and 6.

Attention is drawn to the fact that the tolerance classes shown in Figures 5 and 6, and their limit deviations given in Tables 17 to 32, are not intended to give detailed directives on the selection of tolerance classes for any purpose. Recommendations for the selection of tolerance classes are given in ISO 286-1:2010, Subclause 4.4 and Clause 5.

NOTE Some tolerance classes are only provided for a restricted number of nominal size ranges. For further information, see 6.1.

iteh STANDARD PREVIEW
(standards.iteh.ai)

6 Presentation of Tables 2 to 32

ISO 286-2:2010

6.1 Values may be calculated from the tables given in ISO 286-1, for fundamental deviations used for tolerance classes for which there is no entry in the tables but for which the space has been left blank.

6.2 A small horizontal separation has been inserted in the tables, where appropriate, to distinguish between values for nominal sizes less than or equal to 500 mm and those greater than 500 mm.

Table 1 — Values of standard tolerance grades for nominal sizes up to 3 150 mm

NOTE This table, taken from ISO 286-1:2010, has been included in this part of ISO 286 to facilitate the use and understanding of the tables for limit deviations and of Figures 1 and 2.

| Nominal size | | Standard tolerance grades | | | | | | | | | | | | | | | | | | | |
|--------------|---------------------|---------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-------|------|------|------|------|------|------|------|
| mm | | IT01 | IT0 | IT1 | IT2 | IT3 | IT4 | IT5 | IT6 | IT7 | IT8 | IT9 | IT10 | IT11 | IT12 | IT13 | IT14 | IT15 | IT16 | IT17 | IT18 |
| Above | Up to and including | Standard tolerance values | | | | | | | | | | | | | | | | | | | |
| | | µm | | | | | | | | | | mm | | | | | | | | | |
| — | 3 | 0,3 | 0,5 | 0,8 | 1,2 | 2 | 3 | 4 | 6 | 10 | 14 | 25 | 40 | 60 | 0,1 | 0,14 | 0,25 | 0,4 | 0,6 | 1 | 1,4 |
| 3 | 6 | 0,4 | 0,6 | 1 | 1,5 | 2,5 | 4 | 5 | 8 | 12 | 18 | 30 | 48 | 75 | 0,12 | 0,18 | 0,3 | 0,48 | 0,75 | 1,2 | 1,8 |
| 6 | 10 | 0,4 | 0,6 | 1 | 1,5 | 2,5 | 4 | 6 | 9 | 15 | 22 | 36 | 58 | 90 | 0,15 | 0,22 | 0,36 | 0,58 | 0,9 | 1,5 | 2,2 |
| 10 | 18 | 0,5 | 0,8 | 1,2 | 2 | 3 | 5 | 8 | 11 | 18 | 27 | 43 | 70 | 110 | 0,18 | 0,27 | 0,43 | 0,7 | 1,1 | 1,8 | 2,7 |
| 18 | 30 | 0,6 | 1 | 1,5 | 2,5 | 4 | 6 | 9 | 13 | 21 | 33 | 52 | 84 | 130 | 0,21 | 0,33 | 0,52 | 0,84 | 1,3 | 2,1 | 3,3 |
| 30 | 50 | 0,6 | 1 | 1,5 | 2,5 | 4 | 7 | 11 | 16 | 25 | 39 | 62 | 100 | 160 | 0,25 | 0,39 | 0,62 | 1 | 1,6 | 2,5 | 3,9 |
| 50 | 80 | 0,8 | 1,2 | 2 | 3 | 5 | 8 | 13 | 19 | 30 | 46 | 74 | 120 | 190 | 0,3 | 0,46 | 0,74 | 1,2 | 1,9 | 3 | 4,6 |
| 80 | 120 | 1 | 1,5 | 2,5 | 4 | 6 | 10 | 15 | 22 | 35 | 54 | 87 | 140 | 220 | 0,35 | 0,54 | 0,87 | 1,4 | 2,2 | 3,5 | 5,4 |
| 120 | 180 | 1,2 | 2 | 3,5 | 5 | 8 | 12 | 18 | 25 | 40 | 63 | 100 | 160 | 250 | 0,4 | 0,63 | 1 | 1,6 | 2,5 | 4 | 6,3 |
| 180 | 250 | 2 | 3 | 4,5 | 7 | 10 | 14 | 20 | 29 | 46 | 72 | 115 | 185 | 290 | 0,46 | 0,72 | 1,15 | 1,85 | 2,9 | 4,6 | 7,2 |
| 250 | 315 | 2,5 | 4 | 6 | 8 | 12 | 16 | 23 | 32 | 52 | 81 | 130 | 210 | 320 | 0,52 | 0,81 | 1,3 | 2,1 | 3,2 | 5,2 | 8,1 |
| 315 | 400 | 3 | 5 | 7 | 9 | 13 | 18 | 25 | 36 | 57 | 89 | 140 | 230 | 360 | 0,57 | 0,89 | 1,4 | 2,3 | 3,6 | 5,7 | 8,9 |
| 400 | 500 | 4 | 6 | 8 | 10 | 15 | 20 | 27 | 40 | 63 | 97 | 155 | 250 | 400 | 0,63 | 0,97 | 1,55 | 2,5 | 4 | 6,3 | 9,7 |
| 500 | 630 | | | 9 | 11 | 16 | 22 | 32 | 44 | 70 | 110 | 175 | 280 | 440 | 0,7 | 1,1 | 1,75 | 2,8 | 4,4 | 7 | 11 |
| 630 | 800 | | | 10 | 13 | 18 | 25 | 36 | 50 | 80 | 125 | 200 | 320 | 500 | 0,8 | 1,25 | 2 | 3,2 | 5 | 8 | 12,5 |
| 800 | 1 000 | | | 11 | 15 | 21 | 28 | 40 | 56 | 90 | 140 | 230 | 360 | 560 | 0,9 | 1,4 | 2,3 | 3,6 | 5,6 | 9 | 14 |
| 1 000 | 1 250 | | | 13 | 18 | 24 | 33 | 47 | 66 | 105 | 165 | 260 | 420 | 660 | 1,05 | 1,65 | 2,6 | 4,2 | 6,6 | 10,5 | 16,5 |
| 1 250 | 1 600 | | | 15 | 21 | 29 | 39 | 55 | 78 | 125 | 195 | 310 | 500 | 780 | 1,25 | 1,95 | 3,1 | 5 | 7,8 | 12,5 | 19,5 |
| 1 600 | 2 000 | | | 18 | 25 | 35 | 46 | 65 | 92 | 150 | 230 | 370 | 600 | 920 | 1,5 | 2,3 | 3,7 | 6 | 9,2 | 15 | 23 |
| 2 000 | 2 500 | | | 22 | 30 | 41 | 55 | 78 | 110 | 175 | 280 | 440 | 700 | 1 100 | 1,75 | 2,8 | 4,4 | 7 | 11 | 17,5 | 28 |
| 2 500 | 3 150 | | | 26 | 36 | 50 | 68 | 96 | 135 | 210 | 330 | 540 | 860 | 1 350 | 2,1 | 3,3 | 5,4 | 8,6 | 13,5 | 21 | 33 |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|----------|----------|----------|----------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----|-----|-----|-----|----|-----|----|-----|-----|------|------|------|------|--|
| | | | | | H1 | JS1 | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | H2 | JS2 | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | EF3 | F3 | FG3 | G3 | | H3 | JS3 | K3 | M3 | N3 | P3 | R3 | S3 | | | | | | | | | | | | |
| | | | | E5 | EF4 | F4 | FG4 | G4 | | H4 | JS4 | K4 | M4 | N4 | P4 | R4 | S4 | | | | | | | | | | | | |
| | | | | CD6 | D6 | E6 | EF5 | F5 | FG5 | G5 | H5 | JS5 | K5 | M5 | N5 | P5 | R5 | S5 | T5 | U5 | V5 | X5 | | | | | | | |
| | | | | CD7 | D7 | E7 | EF6 | F6 | FG6 | G6 | H6 | JS6 | J6 | K6 | M6 | N6 | P6 | R6 | S6 | T6 | U6 | V6 | X6 | Y6 | Z6 | ZA6 | | | |
| | | | | CD8 | D8 | E8 | EF7 | F7 | FG7 | G7 | H7 | JS7 | J7 | K7 | M7 | N7 | P7 | R7 | S7 | T7 | U7 | V7 | X7 | Y7 | Z7 | ZA7 | ZB7 | ZC7 | |
| | | B8 | C8 | CD9 | D9 | E9 | EF8 | F8 | FG8 | G8 | H8 | JS8 | J8 | K8 | M8 | N8 | P8 | R8 | S8 | T8 | U8 | V8 | X8 | Y8 | Z8 | ZA8 | ZB8 | ZC8 | |
| A9 | B9 | C9 | | CD10 | D10 | E10 | EF9 | F9 | FG9 | G9 | H9 | JS9 | | K9 | M9 | N9 | P9 | R9 | S9 | | U9 | | X9 | Y9 | Z9 | ZA9 | ZB9 | ZC9 | |
| A10 | B10 | C10 | | D11 | | | EF10 | F10 | FG10 | G10 | H10 | JS10 | | K10 | M10 | N10 | P10 | R10 | S10 | | U10 | | X10 | Y10 | Z10 | ZA10 | ZB10 | ZC10 | |
| A11 | B11 | C11 | | D12 | | | | | | | H11 | JS11 | | | | N11 | | | | | | | | Z11 | ZA11 | ZB11 | ZC11 | | |
| A12 | B12 | C12 | | D13 | | | | | | | H12 | JS12 | | | | | | | | | | | | | | | | | |
| A13 | B13 | C13 | | | | | | | | | H13 | JS13 | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | H14 | JS14 | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | H15 | JS15 | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | H16 | JS16 | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | H17 | JS17 | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | H18 | JS18 | | | | | | | | | | | | | | | | | |
| | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | | | | | | | | | | | | | | |

Figure 3 — Synoptic representation of tolerance classes for holes of nominal sizes less than or equal to 500 mm

| | | | | | | | | | | | | | | | | | | | | | | |
|--|----------|----------|----------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|----|----|----|----|----|--|--|--|--|--|--|
| | | | | | H1 | JS1 | | | | | | | | | | | | | | | | |
| | | | | | H2 | JS2 | | | | | | | | | | | | | | | | |
| | | | | | H3 | JS3 | | | | | | | | | | | | | | | | |
| | | | | | H4 | JS4 | | | | | | | | | | | | | | | | |
| | | | | | H5 | JS5 | | | | | | | | | | | | | | | | |
| | D6 | E6 | | F6 | | G6 | H6 | JS6 | K6 | M6 | N6 | P6 | R6 | S6 | T6 | U6 | | | | | | |
| | D7 | E7 | | F7 | | G7 | H7 | JS7 | K7 | M7 | N7 | P7 | R7 | S7 | T7 | U7 | | | | | | |
| | D8 | E8 | | F8 | | G8 | H8 | JS8 | K8 | M8 | N8 | P8 | R8 | S8 | T8 | U8 | | | | | | |
| | D9 | E9 | | F9 | | | H9 | JS9 | | | | N9 | P9 | | | | | | | | | |
| | D10 | E10 | | | | | H10 | JS10 | | | | | | | | | | | | | | |
| | D11 | | | | | | H11 | JS11 | | | | | | | | | | | | | | |
| | D12 | | | | | | H12 | JS12 | | | | | | | | | | | | | | |
| | D13 | | | | | | H13 | JS13 | | | | | | | | | | | | | | |
| | | | | | | | H14 | JS14 | | | | | | | | | | | | | | |
| | | | | | | | H15 | JS15 | | | | | | | | | | | | | | |
| | | | | | | | H16 | JS16 | | | | | | | | | | | | | | |
| | | | | | | | H17 | JS17 | | | | | | | | | | | | | | |
| | | | | | | | H18 | JS18 | | | | | | | | | | | | | | |
| | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | | | | | | | | | | | |

Figure 4 — Synoptic representation of tolerance classes for holes of nominal sizes greater than 500 mm and less than or equal to 3 150 mm

Table 2 — Limit deviations for holes (fundamental deviations A, B and C)^a

Upper limit deviation = *ES*

Lower limit deviation = *EI*

Deviations in micrometres

| Nominal size mm | | A ^b | | | | | B ^b | | | | | | C | | | | | |
|--------------------|---------------------|------------------|------------------|------------------|------------------|------------------|----------------|--------------|----------------|----------------|----------------|----------------|--------------|--------------|--------------|--------------|----------------|----------------|
| Above | Up to and including | 9 | 10 | 11 | 12 | 13 | 8 | 9 | 10 | 11 | 12 | 13 | 8 | 9 | 10 | 11 | 12 | 13 |
| — | 3 ^b | +295 +270 | +310 +270 | +330 +270 | +370 +270 | +410 +270 | +154 +140 | +165 +140 | +180 +140 | +200 +140 | +240 +140 | +280 +140 | +74 +60 | +85 +60 | +100 +60 | +120 +60 | +160 +60 | +200 +60 |
| 3 | 6 | +300 +270 | +318 +270 | +345 +270 | +390 +270 | +450 +270 | +158 +140 | +170 +140 | +188 +140 | +215 +140 | +260 +140 | +320 +140 | +88 +70 | +100 +70 | +118 +70 | +145 +70 | +190 +70 | +250 +70 |
| 6 | 10 | +316 +280 | +338 +280 | +370 +280 | +430 +280 | +500 +280 | +172 +150 | +186 +150 | +208 +150 | +240 +150 | +300 +150 | +370 +150 | +102 +80 | +116 +80 | +138 +80 | +170 +80 | +230 +80 | +300 +80 |
| 10 | 18 | +333 +290 | +360 +290 | +400 +290 | +470 +290 | +560 +290 | +177 +150 | +193 +150 | +220 +150 | +260 +150 | +330 +150 | +420 +150 | +122 +95 | +138 +95 | +165 +95 | +205 +95 | +275 +95 | +365 +95 |
| 18 | 30 | +352 +300 | +384 +300 | +430 +300 | +510 +300 | +630 +300 | +193 +160 | +212 +160 | +244 +160 | +290 +160 | +370 +160 | +490 +160 | +143 +110 | +162 +110 | +194 +110 | +240 +110 | +320 +110 | +440 +110 |
| 30 | 40 | +372 +310 | +410 +310 | +470 +310 | +560 +310 | +700 +310 | +209 +170 | +232 +170 | +270 +170 | +330 +170 | +420 +170 | +560 +170 | +159 +120 | +182 +120 | +220 +120 | +280 +120 | +370 +120 | +510 +120 |
| 40 | 50 | +382 +320 | +420 +320 | +480 +320 | +570 +320 | +710 +320 | +219 +180 | +242 +180 | +280 +180 | +340 +180 | +430 +180 | +570 +180 | +169 +130 | +192 +130 | +230 +130 | +290 +130 | +380 +130 | +520 +130 |
| 50 | 65 | +414 +340 | +460 +340 | +530 +340 | +640 +340 | +800 +340 | +236 +190 | +264 +190 | +310 +190 | +380 +190 | +490 +190 | +650 +190 | +186 +140 | +214 +140 | +260 +140 | +330 +140 | +440 +140 | +600 +140 |
| 65 | 80 | +434 +360 | +480 +360 | +550 +360 | +660 +360 | +820 +360 | +246 +200 | +274 +200 | +320 +200 | +390 +200 | +500 +200 | +660 +200 | +196 +150 | +224 +150 | +270 +150 | +340 +150 | +450 +150 | +610 +150 |
| 80 | 100 | +467 +380 | +520 +380 | +600 +380 | +730 +380 | +920 +380 | +274 +220 | +307 +220 | +360 +220 | +440 +220 | +570 +220 | +760 +220 | +224 +170 | +257 +170 | +310 +170 | +390 +170 | +520 +170 | +710 +170 |
| 100 | 120 | +497 +410 | +550 +410 | +630 +410 | +760 +410 | +950 +410 | +294 +240 | +327 +240 | +380 +240 | +460 +240 | +590 +240 | +780 +240 | +234 +180 | +267 +180 | +320 +180 | +400 +180 | +530 +180 | +720 +180 |
| 120 | 140 | +560 +460 | +620 +460 | +710 +460 | +860 +460 | +1 090 +460 | +323 +260 | +360 +260 | +420 +260 | +510 +260 | +660 +260 | +890 +260 | +263 +200 | +300 +200 | +360 +200 | +450 +200 | +600 +200 | +830 +200 |
| 140 | 160 | +620 +520 | +680 +520 | +770 +520 | +920 +520 | +1 150 +520 | +343 +280 | +380 +280 | +440 +280 | +530 +280 | +680 +280 | +910 +280 | +273 +210 | +310 +210 | +370 +210 | +460 +210 | +610 +210 | +840 +210 |
| 160 | 180 | +680 +580 | +740 +580 | +830 +580 | +980 +580 | +1 210 +580 | +373 +310 | +410 +310 | +470 +310 | +560 +310 | +710 +310 | +940 +310 | +293 +230 | +330 +230 | +390 +230 | +480 +230 | +630 +230 | +860 +230 |
| 180 | 200 | +775 +60 | +845 +660 | +950 +660 | +1 120 +660 | +1 380 +660 | +412 +340 | +455 +340 | +525 +340 | +630 +340 | +800 +340 | +1 060 +340 | +312 +240 | +355 +240 | +425 +240 | +530 +240 | +700 +240 | +960 +240 |
| 200 | 225 | +855 +740 | +925 +740 | +1 030 +740 | +1 200 +740 | +1 460 +740 | +452 +380 | +495 +380 | +565 +380 | +670 +380 | +840 +380 | +1 100 +380 | +332 +260 | +375 +260 | +445 +260 | +550 +260 | +720 +260 | +980 +260 |
| 225 | 250 | +935 +820 | +1 005 +820 | +1 110 +820 | +1 280 +820 | +1 540 +820 | +492 +420 | +535 +420 | +605 +420 | +710 +420 | +880 +420 | +1 140 +420 | +352 +280 | +395 +280 | +465 +280 | +570 +280 | +740 +280 | +1 000 +280 |
| 250 | 280 | +1 050 +920 | +1 130 +920 | +1 240 +920 | +1 440 +920 | +1 730 +920 | +561 +480 | +610 +480 | +690 +480 | +800 +480 | +1 000 +480 | +1 290 +480 | +381 +300 | +430 +300 | +510 +300 | +620 +300 | +820 +300 | +1 110 +300 |
| 280 | 315 | +1 180 +1 050 | +1 260 +1 050 | +1 370 +1 050 | +1 570 +1 050 | +1 860 +1 050 | +621 +540 | +670 +540 | +750 +540 | +860 +540 | +1 060 +540 | +1 350 +540 | +411 +330 | +460 +330 | +540 +330 | +650 +330 | +850 +330 | +1 140 +330 |
| 315 | 355 | +1 340 +1 200 | +1 430 +1 200 | +1 560 +1 200 | +1 770 +1 200 | +2 090 +1 200 | +689 +600 | +740 +600 | +830 +600 | +960 +600 | +1 170 +600 | +1 490 +600 | +449 +360 | +500 +360 | +590 +360 | +720 +360 | +930 +360 | +1 250 +360 |
| 355 | 400 | +1 490 +1 350 | +1 580 +1 350 | +1 710 +1 350 | +1 920 +1 350 | +2 240 +1 350 | +769 +680 | +820 +680 | +910 +680 | +1 040 +680 | +1 250 +680 | +1 570 +680 | +489 +400 | +540 +400 | +630 +400 | +760 +400 | +970 +400 | +1 290 +400 |
| 400 | 450 | +1 655 +1 500 | +1 750 +1 500 | +1 900 +1 500 | +2 130 +1 500 | +2 470 +1 500 | +857 +760 | +915 +760 | +1 010 +760 | +1 160 +760 | +1 390 +760 | +1 730 +760 | +537 +440 | +595 +440 | +690 +440 | +840 +440 | +1 070 +440 | +1 410 +440 |
| 450 | 500 | +1 805 +1 650 | +1 900 +1 650 | +2 050 +1 650 | +2 280 +1 650 | +2 620 +1 650 | +937 +840 | +995 +840 | +1 090 +840 | +1 240 +840 | +1 470 +840 | +1 810 +840 | +577 +480 | +635 +480 | +730 +480 | +880 +480 | +1 110 +480 | +1 450 +480 |

^a Fundamental deviations A, B and C are not provided for nominal sizes greater than 500 mm.

^b Fundamental deviations A and B shall not be used for any standard tolerances in nominal sizes less than or equal to 1 mm.

Table 3 — Limit deviations for holes (fundamental deviations CD, D and E)

Upper limit deviation = *ES*

Lower limit deviation = *EI*

Deviations in micrometres

| Nominal size mm | | CD ^a | | | | | D | | | | | | | | E | | | | | |
|--------------------|---------------------|-----------------|------------|------------|------------|-------------|--------------|--------------|--------------|----------------|----------------|----------------|----------------|----------------|--------------|--------------|--------------|--------------|----------------|--------------|
| Above | Up to and including | 6 | 7 | 8 | 9 | 10 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 5 | 6 | 7 | 8 | 9 | 10 |
| — | 3 | +40 +34 | +44 +34 | +48 +34 | +59 +34 | +74 +34 | +26 +20 | +30 +20 | +34 +20 | +45 +20 | +60 +20 | +80 +20 | +120 +20 | +160 +20 | +18 +14 | +20 +14 | +24 +14 | +28 +14 | +39 +14 | +54 +14 |
| 3 | 6 | +54 +46 | +58 +46 | +64 +46 | +76 +46 | +94 +46 | +38 +30 | +42 +30 | +48 +30 | +60 +30 | +78 +30 | +105 +30 | +150 +30 | +210 +30 | +25 +20 | +28 +20 | +32 +20 | +38 +20 | +50 +20 | +68 +20 |
| 6 | 10 | +65 +56 | +71 +56 | +78 +56 | +92 +56 | +114 +56 | +49 +40 | +55 +40 | +62 +40 | +76 +40 | +98 +40 | +130 +40 | +190 +40 | +260 +40 | +31 +25 | +34 +25 | +40 +25 | +47 +25 | +61 +25 | +83 +25 |
| 10 | 18 | | | | | | +61 +50 | +68 +50 | +77 +50 | +93 +50 | +120 +50 | +160 +50 | +230 +50 | +320 +50 | +40 +32 | +43 +32 | +50 +32 | +59 +32 | +75 +32 | +102 +32 |
| 18 | 30 | | | | | | +78 +65 | +86 +65 | +98 +65 | +117 +65 | +149 +65 | +195 +65 | +275 +65 | +395 +65 | +49 +40 | +53 +40 | +61 +40 | +73 +40 | +92 +40 | +124 +40 |
| 30 | 50 | | | | | | +96 +80 | +105 +80 | +119 +80 | +142 +80 | +180 +80 | +240 +80 | +330 +80 | +470 +80 | +61 +50 | +66 +50 | +75 +50 | +89 +50 | +112 +50 | +150 +50 |
| 50 | 80 | | | | | | +119 +100 | +130 +100 | +146 +100 | +174 +100 | +220 +100 | +290 +100 | +400 +100 | +560 +100 | +73 +60 | +79 +60 | +90 +60 | +106 +60 | +134 +60 | +180 +60 |
| 80 | 120 | | | | | | +142 +120 | +155 +120 | +174 +120 | +207 +120 | +260 +120 | +340 +120 | +470 +120 | +660 +120 | +87 +72 | +94 +72 | +107 +72 | +126 +72 | +159 +72 | +212 +72 |
| 120 | 180 | | | | | | +170 +145 | +185 +145 | +208 +145 | +245 +145 | +305 +145 | +395 +145 | +545 +145 | +775 +145 | +103 +85 | +110 +85 | +125 +85 | +148 +85 | +185 +85 | +245 +85 |
| 180 | 250 | | | | | | +199 +170 | +216 +170 | +242 +170 | +285 +170 | +355 +170 | +460 +170 | +630 +170 | +890 +170 | +120 +100 | +129 +100 | +146 +100 | +172 +100 | +215 +100 | +285 +100 |
| 250 | 315 | | | | | | +222 +190 | +242 +190 | +271 +190 | +320 +190 | +400 +190 | +510 +190 | +710 +190 | +1 000 +190 | +133 +110 | +142 +110 | +162 +110 | +191 +110 | +240 +110 | +320 +110 |
| 315 | 400 | | | | | | +246 +210 | +267 +210 | +299 +210 | +350 +210 | +440 +210 | +570 +210 | +780 +210 | +1 100 +210 | +150 +125 | +161 +125 | +182 +125 | +214 +125 | +265 +125 | +355 +125 |
| 400 | 500 | | | | | | +270 +230 | +293 +230 | +327 +230 | +385 +230 | +480 +230 | +630 +230 | +860 +230 | +1 200 +230 | +162 +135 | +175 +135 | +198 +135 | +232 +135 | +290 +135 | +385 +135 |
| 500 | 630 | | | | | | +304 +260 | +330 +260 | +370 +260 | +435 +260 | +540 +260 | +700 +260 | +960 +260 | +1 360 +260 | +189 +145 | +215 +145 | +255 +145 | +320 +145 | +425 +145 | |
| 630 | 800 | | | | | | +340 +290 | +370 +290 | +415 +290 | +490 +290 | +610 +290 | +790 +290 | +1 090 +290 | +1 540 +290 | +210 +160 | +240 +160 | +285 +160 | +360 +160 | +480 +160 | |
| 800 | 1 000 | | | | | | +376 +320 | +410 +320 | +460 +320 | +550 +320 | +680 +320 | +880 +320 | +1 220 +320 | +1 720 +320 | +226 +170 | +260 +170 | +310 +170 | +400 +170 | +530 +170 | |
| 1 000 | 1 250 | | | | | | +416 +350 | +455 +350 | +515 +350 | +610 +350 | +770 +350 | +1 010 +350 | +1 400 +350 | +2 000 +350 | +261 +195 | +300 +195 | +360 +195 | +455 +195 | +615 +195 | |
| 1 250 | 1 600 | | | | | | +468 +390 | +515 +390 | +585 +390 | +700 +390 | +890 +390 | +1 170 +390 | +1 640 +390 | +2 340 +390 | +298 +220 | +345 +220 | +415 +220 | +530 +220 | +720 +220 | |
| 1 600 | 2 000 | | | | | | +522 +430 | +580 +430 | +660 +430 | +800 +430 | +1 030 +430 | +1 350 +430 | +1 930 +430 | +2 730 +430 | +332 +240 | +390 +240 | +470 +240 | +610 +240 | +840 +240 | |
| 2 000 | 2 500 | | | | | | +590 +480 | +655 +480 | +760 +480 | +920 +480 | +1 180 +480 | +1 580 +480 | +2 230 +480 | +3 280 +480 | +370 +260 | +435 +260 | +540 +260 | +700 +260 | +960 +260 | |
| 2 500 | 3 150 | | | | | | +655 +520 | +730 +520 | +850 +520 | +1 060 +520 | +1 380 +520 | +1 870 +520 | +2 620 +520 | +3 820 +520 | +425 +290 | +500 +290 | +620 +290 | +830 +290 | +1 150 +290 | |

^a The intermediate fundamental deviation CD is provided primarily for fine mechanisms and horology. If tolerance classes involving this fundamental deviation in other nominal sizes are required, they may be calculated in accordance with ISO 286-1.