

---

---

**Road vehicles — Connection interface for  
pyrotechnic devices, two-way and three-  
way connections —**

Part 3:  
**Pyrotechnic device and harness  
connector assembly - type 1**

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

*Véhicules routiers — Interface de raccordement pour dispositifs  
pyrotechniques, deux voies et trois voies —*

*Partie 3: Assemblage du dispositif pyrotechnique et du connecteur  
faisceau - type 1*

<https://standards.iteh.ai/catalog/standards/sist/6ff1d656-80c3-4e20-add9-c8c6b8221928/iso-ts-19072-3-2012>



## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/TS 19072-3:2012](https://standards.iteh.ai/catalog/standards/sist/6ff1d656-80c3-4e20-add9-c8c6b8221928/iso-ts-19072-3-2012)

<https://standards.iteh.ai/catalog/standards/sist/6ff1d656-80c3-4e20-add9-c8c6b8221928/iso-ts-19072-3-2012>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

In other circumstances, particularly when there is an urgent market requirement for such documents, a technical committee may decide to publish other types of document:

- an ISO Publicly Available Specification (ISO/PAS) represents an agreement between technical experts in an ISO working group and is accepted for publication if it is approved by more than 50 % of the members of the parent committee casting a vote;
- an ISO Technical Specification (ISO/TS) represents an agreement between the members of a technical committee and is accepted for publication if it is approved by 2/3 of the members of the committee casting a vote.

An ISO/PAS or ISO/TS is reviewed after three years in order to decide whether it will be confirmed for a further three years, revised to become an International Standard or withdrawn. If the ISO/PAS or ISO/TS is confirmed, it is reviewed again after a further three years, at which time it must either be transformed into an International Standard or be withdrawn.

ISO/TS 19072-3 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

This second edition cancels and replaces the first edition (ISO/TS 19072-3:2008), which has been technically revised.

ISO 19072 consists of the following parts, under the general title *Road vehicles — Connection interface for pyrotechnic devices, two-way and three-way connections*:

- *Part 1: Pocket interface definition*
- *Part 2: Test methods and general performance requirements*
- *Part 3: Pyrotechnic device and harness connector assembly - type 1* [Technical Specification]

The following parts are under preparation:

- *Part 4: Pyrotechnic device and harness connector assembly - type 2* [Technical Specification]

## Introduction

Road vehicles integrate an increasing number of pyrotechnic devices contributing to occupant safety in vehicles, e.g. frontal and side air bag, safety belt pretensioner.

To build the complete system providing the function requires a supply of various components from several different equipment makers. Vehicle manufacturers need to define a common specification to ensure that connectors designed and produced for the various equipment makers can be mated without any difficulty.

In the current design of this vehicle equipment, three areas of connection have been identified:

- connection between the pyrotechnic device (e.g. initiator) and the harness connector;
- connection between the tab holder and the clip holder of the harness connector;
- connection between the harness connector and the electronic control module.

The connection between the pyrotechnic device and the harness connector is the only connection that can be standardized and it forms the subject of this Technical Specification. Due to the location of the safety device in the vehicle, the connector design could be right angle or straight.

Due to the fact that several electrostatic discharge (ESD) protection levels are requested by vehicle manufacturers, a two-way without ground option of the pyrotechnic device/initiator and harness connector assembly is also defined.

The International Organization for Standardization (ISO) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent.

ISO takes no position concerning the evidence, validity or scope of this patent right.

The holder of this patent right has assured ISO that he is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ISO. Information may be obtained from:

FCI  
145, rue Yves-Le-Coz  
78000 Versailles  
France

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO shall not be held responsible for identifying any or all such patent rights.

# Road vehicles — Connection interface for pyrotechnic devices, two-way and three-way connections —

## Part 3: Pyrotechnic device and harness connector assembly - type 1

### 1 Scope

This Technical Specification defines the general minimum specifications of a type 1 three-way connection interface, including ground connection, linking the pyrotechnic device and harness connector built into a road vehicle.

A two-way without ground variant of the pyrotechnic device/initiator and harness connector assembly is also defined. All requirements apply also to the two-way design, except all items related to ground connection.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 178, *Plastics — Determination of flexural properties*

ISO 8092-2, *Road vehicles — Connections for on-board electrical wiring harnesses — Part 2: Definitions, test methods and general performance requirements*

ISO 14647, *Metallic coatings — Determination of porosity in gold coatings on metal substrates — Nitric acid vapour test*

ISO 19072-1, *Road vehicles — Connection interface for pyrotechnic devices, two-way and three-way connections — Part 1: Pocket interface definition*

ISO 19072-2, *Road vehicles — Connection interface for pyrotechnic devices, two-way and three-way connections — Part 2: Test methods and general performance requirements*

ISO 27874, *Metallic and other inorganic coatings — Electrodeposited gold and gold alloy coatings for electrical, electronic and engineering purposes — Specification and test methods*

RAL German Institute for Quality Assurance and Certification e.V., RAL Colours homepage, <https://www.ral-farben.de/ral-farben.html>

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 8092-2 and the following apply.

#### 3.1

##### connector

assembly of contact and housing that terminates conductors for the purpose of providing connection and disconnection to a suitable mating connector

NOTE A male (female) connector is a housing containing male (female) contacts and accessory items. A male connector can be permanently fixed to a wiring harness or to an appliance, e.g. an electronic control unit (ECU). A female connector is, in general, permanently fixed to a wiring harness.

**3.2 housing**  
connector without its contacts

**3.3 initiator**  
part of the pyrotechnical device holding the two male contacts

**3.4 retainer**  
ring, generally made of plastic, holding an optional shorting clip and providing coding and electrical insulation

NOTE The shorting clip may be omitted on agreement between manufacturer and supplier.

**3.5 shorting clip shunt**  
metallic bar of the retainer providing the electrical connection between two male contacts

**3.6 squib holder**  
part of the pyrotechnical device holding the initiator and the retainer

## 4 Dimensional features and performance requirements

### 4.1 General

The female connector shall be designed to avoid damage to male contacts and the initiator in the case of improper mating.

The connector, retainer and squib holder assembly shall comply with the requirements in ISO 19072-1 and ISO 19072-2.

### 4.2 Retainer and squib holder assembly

The dimensions of the retainer shall comply with Figure 1. The dimensions of the squib holder interface are defined in ISO 19072-1.

### 4.3 Codings and polarization



Coding and polarization are determined by the dimensions and position of the coding keys, each of which has its own colour code (see Figure 2 and Table 1).

The colour code shall be in accordance with RAL<sup>1)</sup>; however, there needs to be an agreement about the range between the customer and supplier.

---

1) RAL colour space system developed by Reichsausschuß für Lieferbedingungen und Gütesicherung (German Institute for Quality Assurance and Certification e.V.); see Clause 2.

Dimensions in millimetres

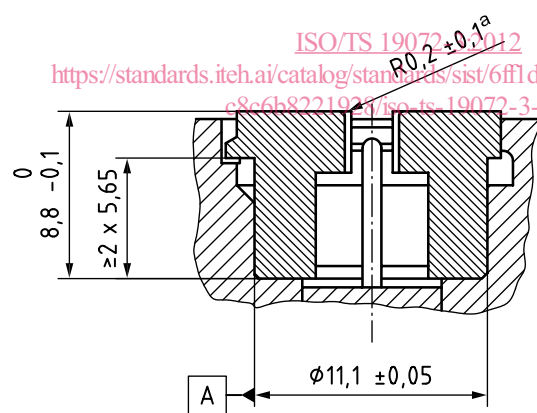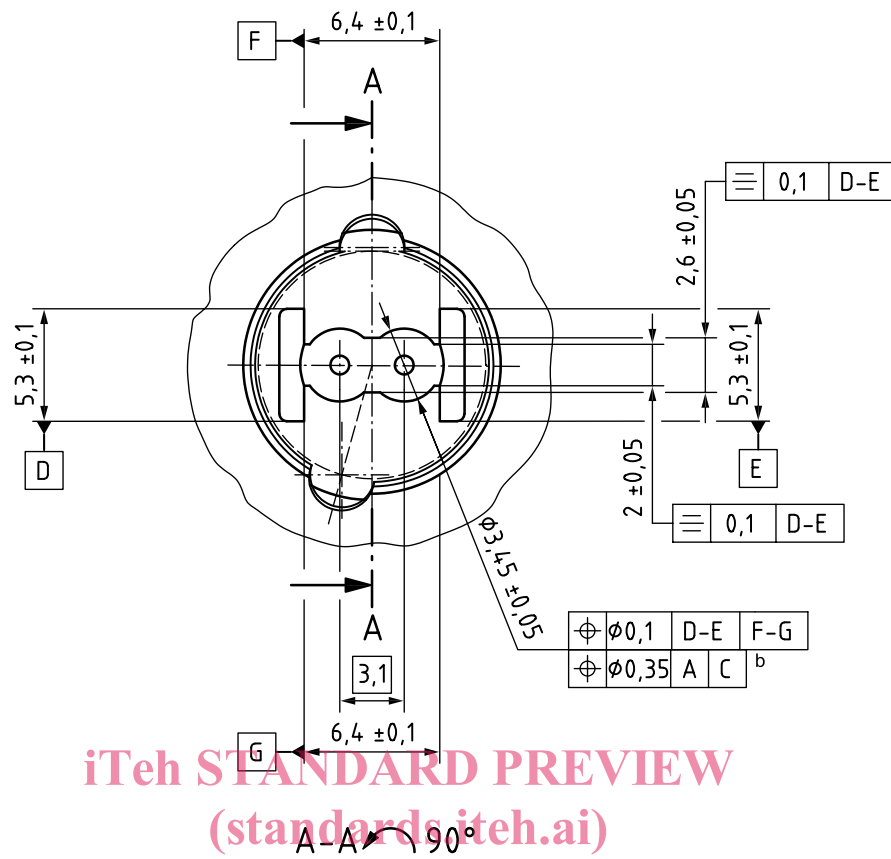

- <sup>a</sup> The radius also applies to the complete top edge, including coding features.
- <sup>b</sup> Datum A and datum C are defined in ISO 19072-1.

Figure 1 — Retainer and squib holder assembly

Dimensions in millimetres

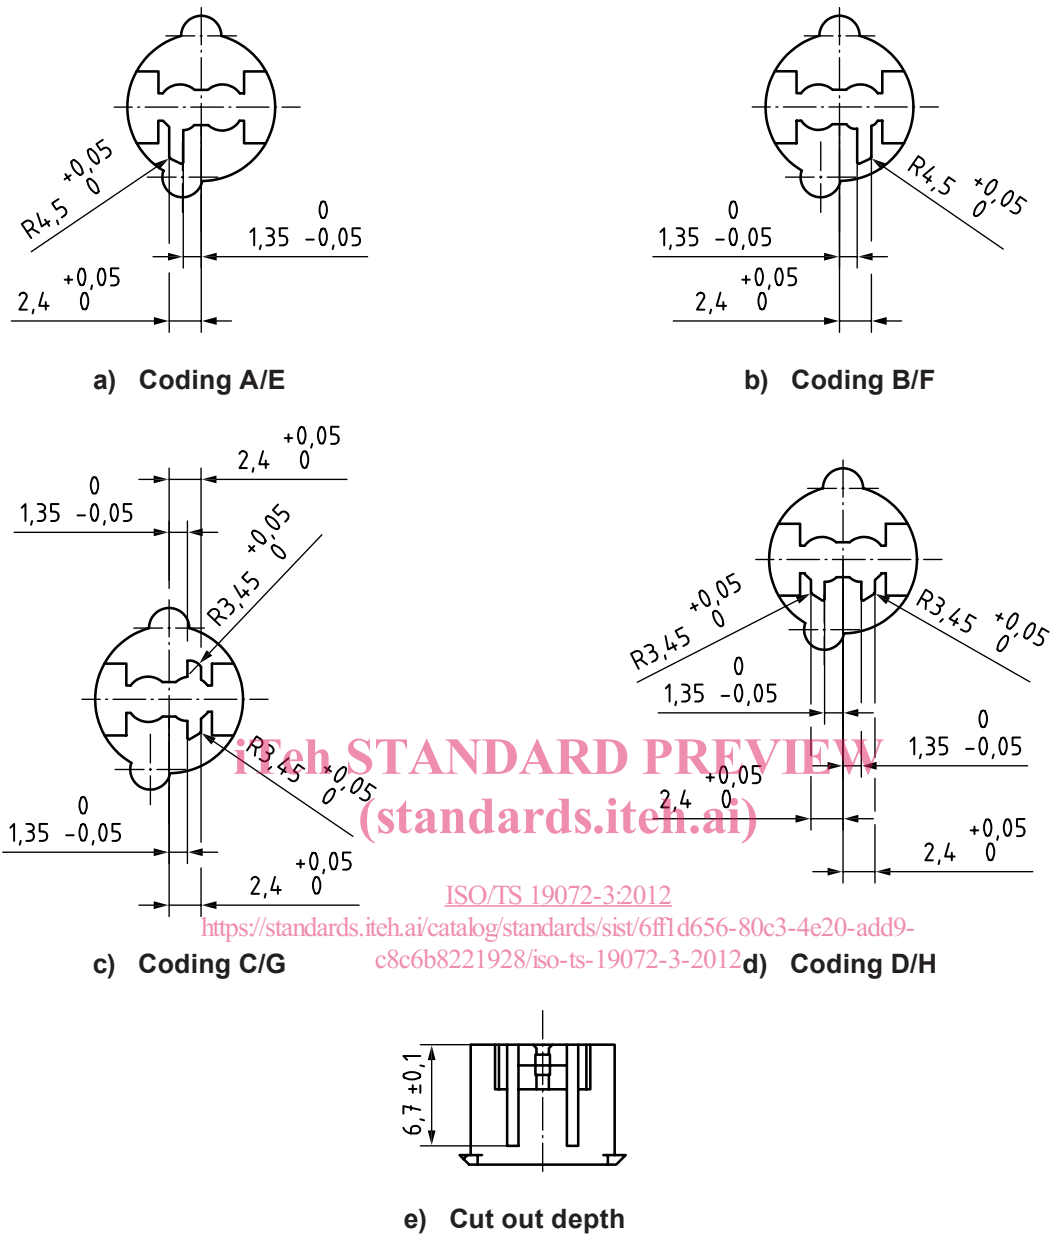


Figure 2 — Dimensions and position of coding keys



Table 1 — Type of coding used and assigned colour code

Colours RAL		Connection							
No.	Colour description	Three-way			Two-way				
		A	B	C	D	E	F	G	H
9011	graphite black	X							
6017	may green		X						
2007	luminous bright orange			X					
4008	signal violet				X				
4006	traffic purple					X			
9003	signal white						X		
6027	light green							X	
1018	zinc yellow								X

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/TS 19072-3:2012](https://standards.iteh.ai/catalog/standards/sist/6ff1d656-80c3-4e20-add9-c8c6b8221928/iso-ts-19072-3-2012)

<https://standards.iteh.ai/catalog/standards/sist/6ff1d656-80c3-4e20-add9-c8c6b8221928/iso-ts-19072-3-2012>