
**Road vehicles — Unified diagnostic
services (UDS) —**

**Part 1:
Specification and requirements**

Véhicules routiers — Services de diagnostic unifiés (SDU) —

Partie 1: Spécification et exigences

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 14229-1:2013

<https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 14229-1:2013](https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013)

<https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	vi
Introduction.....	vii
1 Scope	1
2 Normative references	1
3 Terms, definitions, symbols and abbreviated terms	1
3.1 Terms and definitions	1
3.2 Abbreviated terms	4
4 Conventions	5
5 Document overview.....	6
6 Application layer services	7
6.1 General	7
6.2 Format description of application layer services	9
6.3 Format description of service primitives	9
6.4 Service data unit specification.....	12
7 Application layer protocol	15
7.1 General definition	15
7.2 Protocol data unit specification	16
7.3 Application protocol control information	16
7.4 Negative response/confirmation service primitive	18
7.5 Server response implementation rules	18
8 Service description conventions	29
8.1 Service description	29
8.2 Request message	30
8.3 Positive response message	33
8.4 Supported negative response codes (NRC_)	34
8.5 Message flow examples.....	34
9 Diagnostic and Communication Management functional unit	35
9.1 Overview.....	35
9.2 DiagnosticSessionControl (0x10) service.....	36
9.3 ECUReset (0x11) service	43
9.4 SecurityAccess (0x27) service	47
9.5 CommunicationControl (0x28) service.....	53
9.6 TesterPresent (0x3E) service	58
9.7 AccessTimingParameter (0x83) service.....	61
9.8 SecuredDataTransmission (0x84) service	66
9.9 ControlDTCSetting (0x85) service	71
9.10 ResponseOnEvent (0x86) service.....	75
9.11 LinkControl (0x87) service.....	99
10 Data Transmission functional unit	106
10.1 Overview.....	106
10.2 ReadDataByIdentifier (0x22) service	106
10.3 ReadMemoryByAddress (0x23) service	113
10.4 ReadScalingDataByIdentifier (0x24) service	119
10.5 ReadDataByPeriodicIdentifier (0x2A) service	126
10.6 DynamicallyDefinedDataIdentifier (0x2C) service.....	140
10.7 WriteDataByIdentifier (0x2E) service.....	162
10.8 WriteMemoryByAddress (0x3D) service	167

11	Stored Data Transmission functional unit	174
11.1	Overview	174
11.2	ClearDiagnosticInformation (0x14) Service	175
11.3	ReadDTCInformation (0x19) Service.....	178
12	InputOutput Control functional unit.....	245
12.1	Overview	245
12.2	InputOutputControlByIdentifier (0x2F) service	245
13	Routine functional unit.....	259
13.1	Overview	259
13.2	RoutineControl (0x31) service.....	260
14	Upload Download functional unit.....	270
14.1	Overview	270
14.2	RequestDownload (0x34) service.....	270
14.3	RequestUpload (0x35) service.....	275
14.4	TransferData (0x36) service.....	280
14.5	RequestTransferExit (0x37) service.....	285
14.6	RequestFileTransfer (0x38) service	295
15	Non-volatile server memory programming process	303
15.1	General information.....	303
15.2	Detailed programming sequence	307
15.3	Server reprogramming requirements	315
15.4	Non-volatile server memory programming message flow examples.....	319
Annex A	(normative) Global parameter definitions	325
A.1	Negative response codes	325
Annex B	(normative) Diagnostic and communication management functional unit data-parameter definitions	333
B.1	communicationType parameter definition	333
B.2	eventWindowTime parameter definition	334
B.3	linkControlModelIdentifier parameter definition	334
B.4	nodeIdentificationNumber parameter definition	335
Annex C	(normative) Data transmission functional unit data-parameter definitions	337
C.1	DID parameter definitions	337
C.2	scalingByte parameter definitions	343
C.3	scalingByteExtension parameter definitions.....	345
C.4	transmissionMode parameter definitions	351
C.5	Coding of UDS version number	352
Annex D	(normative) Stored data transmission functional unit data-parameter definitions	353
D.1	groupOfDTC parameter definition.....	353
D.2	DTCStatusMask and statusOfDTC bit definitions	353
D.3	DTC severity and class definition	366
D.4	DTCFormatIdentifier definition.....	369
D.5	FunctionalGroupIdentifier definition	369
D.6	DTCFaultDetectionCounter operation implementation example.....	371
D.7	DTC AgingCounter example	372
Annex E	(normative) Input output control functional unit data-parameter definitions	374
E.1	InputOutputControlParameter definitions	374
Annex F	(normative) Routine functional unit data-parameter definitions.....	375
F.1	RoutineIdentifier (RID) definition	375
Annex G	(normative) Upload and download functional unit data-parameter	376
G.1	Definition of modeOfOperation values.....	376
Annex H	(informative) Examples for addressAndLengthFormatIdentifier parameter values	377
H.1	addressAndLengthFormatIdentifier example values.....	377
Annex I	(normative) Security access state chart.....	379

I.1	General	379
I.2	Disjunctive normal form based state transition definitions.....	379
Annex J (informative) Recommended implementation for multiple client environments		385
J.1	Introduction.....	385
J.2	Implementation specific limitations	385
J.3	Use cases relevant for system design	386
J.4	Use Case Evaluation:	388
J.5	Multiple client server level implementation	389
Bibliography.....		391

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 14229-1:2013](https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013)

<https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14229-1 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

This second edition cancels and replaces the first edition (ISO 14229-1:2006), which has been technically revised.

ISO 14229 consists of the following parts, under the general title *Road vehicles — Unified diagnostic services (UDS)*:

- <https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013>
- *Part 1: Specification and requirements*
 - *Part 2: Session layer services*
 - *Part 3: Unified diagnostic services on CAN implementation (UDSonCAN)*
 - *Part 4: Unified diagnostic services on FlexRay implementation (UDSonFR)*
 - *Part 5: Unified diagnostic services on Internet Protocol implementation (UDSonIP)*
 - *Part 6: Unified diagnostic services on K-Line implementation (UDSonK-Line)*

The following part is under preparation:

- *Part 7: Unified diagnostic services on Local Interconnect Network implementation (UDSonLIN)*

The titles of future parts will be drafted as follows:

- *Part n: Unified diagnostic services on ... implementation (UDSon...)*

Introduction

ISO 14229 has been established in order to define common requirements for diagnostic systems, whatever the serial data link is.

To achieve this, ISO 14229 is based on the Open Systems Interconnection (OSI) Basic Reference Model in accordance with ISO 7498-1 and ISO/IEC 10731, which structures communication systems into seven layers. When mapped on this model, the services used by a diagnostic tester (client) and an Electronic Control Unit (ECU, server) are broken into the following layers in accordance with Table 1:

- Application layer (layer 7), unified diagnostic services specified in ISO 14229-1, ISO 14229-3 UDSONCAN, ISO 14229-4 UDSONFR, ISO 14229-5 UDSONIP, ISO 14229-6 UDSONK-Line, ISO 14229-7 UDSONLIN, further standards and ISO 27145-3 WWH-OBD.
- Presentation layer (layer 6), vehicle manufacturer specific, ISO 27145-2 WWH-OBD.
- Session layer services (layer 5) specified in ISO 14229-2.
- Transport layer services (layer 4), specified in ISO 15765-2 DoCAN, ISO 10681-2 Communication on FlexRay, ISO 13400-2 DoIP, ISO 17987-2 LIN, ISO 27145-4 WWH-OBD.
- Network layer services (layer 3), specified in ISO 15765-2 DoCAN, ISO 10681-2 Communication on FlexRay, ISO 13400-2 DoIP, ISO 17987-2 LIN, ISO 27145-4 WWH-OBD.
- Data link layer (layer 2), specified in ISO 11898-1, ISO 11898-2, ISO 17458-2, ISO 13400-3, IEEE 802.3, ISO 14230-2, ISO 17987-3 LIN and further standards, ISO 27145-4 WWH-OBD.
- Physical layer (layer 1), specified in ISO 11898-1, ISO 11898-2, ISO 17458-4, ISO 13400-3, IEEE 802.3, ISO 14230-1, ISO 17987-4 LIN and further standards, ISO 27145-4 WWH-OBD.

NOTE The diagnostic services in this standard are implemented in various applications e.g. Road vehicles – Tachograph systems, Road vehicles – Interchange of digital information on electrical connections between towing and towed vehicles, Road vehicles – Diagnostic systems, etc. It is required that future modifications to this standard provide long-term backward compatibility with the implementation standards as described above.

Table 1 — Example of diagnostic/programming specifications applicable to the OSI layers

Applicability	OSI seven layer	Enhanced diagnostics services						WWH-OBD
Seven layer according to ISO/IEC 7498-1 and ISO/IEC 10731	Application (layer 7)	ISO 14229-1, ISO 14229-3 UDSONCAN, ISO 14229-4 UDSONFR, ISO 14229-5 UDSONIP, ISO 14229-6 UDSONK-Line, ISO 14229-7 UDSONLIN, further standards						ISO 27145-3
	Presentation (layer 6)	vehicle manufacturer specific						ISO 27145-2
	Session (layer 5)	ISO 14229-2						
	Transport (layer 4)	ISO 15765-2	ISO 10681-2	ISO 13400-2	Not applicable	ISO 17987-2	further standards	ISO 27145-4
	Network (layer 3)						further standards	
	Data link (layer 2)	ISO 11898-1, ISO 11898-2	ISO 17458-2	ISO 13400-3, IEEE 802.3	ISO 14230-2	ISO 17987-3	further standards	
	Physical (layer 1)		ISO 17458-4		ISO 14230-1	ISO 17987-4	further standards	

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 14229-1:2013

<https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013>

Road vehicles — Unified diagnostic services (UDS) —

Part 1: Specifications and requirements

1 Scope

This part of ISO 14229 specifies data link independent requirements of diagnostic services, which allow a diagnostic tester (client) to control diagnostic functions in an on-vehicle Electronic Control Unit (ECU, server) such as an electronic fuel injection, automatic gear box, anti-lock braking system, etc. connected to a serial data link embedded in a road vehicle.

It specifies generic services, which allow the diagnostic tester (client) to stop or to resume non-diagnostic message transmission on the data link.

This part of ISO 14229 does not apply to non-diagnostic message transmission on the vehicle's communication data link between two Electronic Control Units. However, this part of ISO 14229 does not restrict an in-vehicle on-board tester (client) implementation in an ECU in order to utilize the diagnostic services on the vehicle's communication data link to perform bidirectional diagnostic data exchange.

This part of ISO 14229 does not specify any implementation requirements.

2 Normative references

ISO 14229-1:2013

<https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73->

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14229-2, *Road vehicles — Unified diagnostic services (UDS) — Part 2: Session layer services*

3 Terms, definitions, symbols and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1.1

boot manager

part of the boot software that executes immediately after an ECU power on or reset whose primary purpose is to check whether a valid application is available to execute as compared to transferring control to the reprogramming software

NOTE The boot manager may also take into account other conditions for transitioning control to the reprogramming software.

3.1.2

boot memory partition

area of the server memory in which the boot software is located

3.1.3

boot software

software which is executed in a special part of server memory which is used primarily to boot the ECU and perform server programming

NOTE 1 This area of memory is not erased during a normal programming sequence and must execute when the server application is missing or otherwise deemed invalid to always ensure the capability to reprogram the server.

NOTE 2 See also 3.1.1 and 3.1.17.

3.1.4

client

function that is part of the tester and that makes use of the diagnostic services

NOTE A tester normally makes use of other functions such as data base management, specific interpretation, human-machine interface.

3.1.5

diagnostic data

data that is located in the memory of an electronic control unit which may be inspected and/or possibly modified by the tester

NOTE 1 Diagnostic data includes analogue inputs and outputs, digital inputs and outputs, intermediate values and various status information.

NOTE 2 Examples of diagnostic data are vehicle speed, throttle angle, mirror position, system status, etc. Three types of values are defined for diagnostic data:

- the current value: the value currently used by (or resulting from) the normal operation of the electronic control unit;
- a stored value: an internal copy of the current value made at specific moments (e.g. when a malfunction occurs or periodically); this copy is made under the control of the electronic control unit;
- a static value: e.g. VIN. <https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013>

The server is not obliged to keep internal copies of its data for diagnostic purposes, in which case the tester may only request the current value.

NOTE 3 Defining a repair shop or development testing session selects different server functionality (e.g. access to all memory locations may only be allowed in the development testing session).

3.1.6

diagnostic routine

routine that is embedded in an electronic control unit and that may be started by a server upon a request from the client

NOTE It could either run instead of a normal operating program, or could be enabled in this mode and executed with the normal operating program. In the first case, normal operation for the server is not possible. In the second case, multiple diagnostic routines may be enabled that run while all other parts of the electronic control unit are functioning normally.

3.1.7

diagnostic service

information exchange initiated by a client in order to require diagnostic information from a server or/and to modify its behaviour for diagnostic purpose

3.1.8

diagnostic session

state within the server in which a specific set of diagnostic services and functionality is enabled

3.1.9**diagnostic trouble code****DTC**

numerical common identifier for a fault condition identified by the on-board diagnostic system

3.1.10**ECU**

electronic control unit, containing at least one server

NOTE Systems considered as Electronic Control Units include Anti-lock Braking System (ABS) and Engine Management System.

3.1.11**functional unit**

set of functionally close or complementary diagnostic services

3.1.12**integer type**

simple type with distinguished values which are the positive and the negative whole numbers, including zero

NOTE The range of type integer is not specified within this part of ISO 14229.

3.1.13**local client**

client that is connected to the same local network as the server and is part of the same address space as the server

iTeh STANDARD PREVIEW
(standards.iteh.ai)

3.1.14**local server**

server that is connected to the same local network as the client and is part of the same address space as the client

[ISO 14229-1:2013](https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013)

<https://standards.iteh.ai/catalog/standards/sist/ac63536f-06e8-4626-aa73-827453da54e3/iso-14229-1-2013>

3.1.15**OSI**

open systems interconnection

3.1.16**permanent DTC**

diagnostic trouble code (DTC) that remains in non-volatile memory, even after a clear DTC request, until other criteria (typically regulatory) are met (e.g. the appropriate monitors for each DTC have successfully passed)

NOTE Refer to the relevant legislation for all necessary requirements.

3.1.17**record**

one or more diagnostic data elements that are referred to together by a single means of identification

NOTE A snapshot including various input/output data and trouble codes is an example of a record.

3.1.18**remote server**

server that is not directly connected to the main diagnostic network

NOTE 1 A remote server is identified by means of a remote address. Remote addresses represent an own address space that is independent from the addresses on the main network.

NOTE 2 A remote server is reached via a local server on the main network. Each local server on the main network can act as a gate to one independent set of remote servers. A pair of addresses must therefore always identify a remote server: one local address that identifies the gate to the remote network and one remote address identifying the remote server itself.

3.1.19

remote client

client that is not directly connected to the main diagnostic network

NOTE 1 A remote client is identified by means of a remote address.

NOTE 2 Remote addresses represent an own address space that is independent from the addresses on the main network.

3.1.20

reprogramming software

part of the boot software that allows for reprogramming of the electronic control unit

3.1.21

security

mechanism for protecting vehicle modules from "unauthorized" intrusion through a vehicle diagnostic data link

3.1.22

server

function that is part of an electronic control unit and that provides the diagnostic services

NOTE This international standard differentiates between the server (i.e. the function) and the electronic control unit so that this standard remains independent from the implementation.

3.1.23

supported DTC

diagnostic trouble code which is currently configured/calibrated and enabled to execute under pre-defined vehicle conditions

iTeh STANDARD PREVIEW
(standards.iteh.ai)

3.1.24

tester

system that controls functions such as test, inspection, monitoring, or diagnosis of an on-vehicle electronic control unit and may be dedicated to a specific type of operator (e.g. an off-board scan tool dedicated to garage mechanics, an off-board test tool dedicated to assembly plants, or an on-board tester)

ISO 14229-1:2013

<https://standards.iteh.ai/catalog/standards/sist/35761201/iso-14229-1-2013>

NOTE The tester is also referenced as the client.

3.2 Abbreviated terms

.con	service primitive .confirmation
.ind	service primitive .indication
.req	service primitive .request
A_PCI	application layer protocol control information
ECU	electronic control unit
EDR	event data recorder
N/A	not applicable
NR_SI	negative response service identifier
NRC	negative response code
OSI	open systems interconnection

RA	remote address
SA	source address
SI	service identifier
TA	target address
TA_type	target address type

4 Conventions

This part of ISO 14229 is based on the conventions discussed in the OSI Service Conventions (ISO/IEC 10731:1994) as they apply for diagnostic services.

These conventions specify the interactions between the service user and the service provider. Information is passed between the service user and the service provider by service primitives, which may convey parameters.

The distinction between service and protocol is summarised in Figure 1.

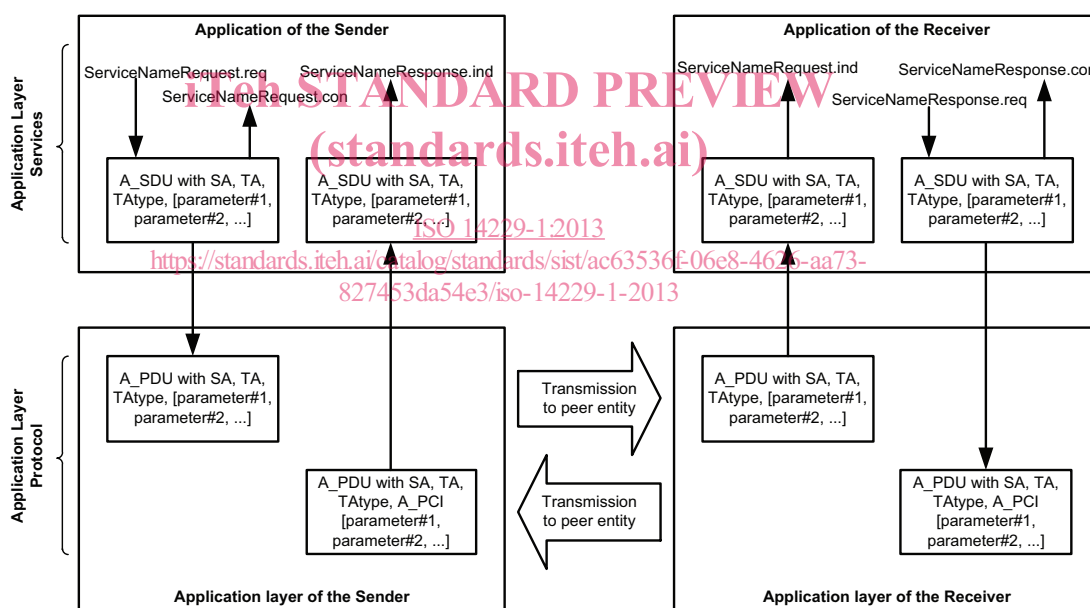


Figure 1 — The services and the protocol

This part of ISO 14229 defines both confirmed and unconfirmed services.

The confirmed services use the six service primitives request, req_confirm, indication, response, rsp_confirm and confirmation.

The unconfirmed services use only the request, req_confirm and indication service primitives.

For all services defined in this part of ISO 14229 the request and indication service primitives always have the same format and parameters. Consequently for all services the response and confirmation service primitives (except req_confirm and rsp_confirm) always have the same format and parameters. When the service primitives are defined in this International Standard, only the request and response service primitives are listed.

5 Document overview

Figure 2 depicts the implementation of UDS document reference according to OSI model.

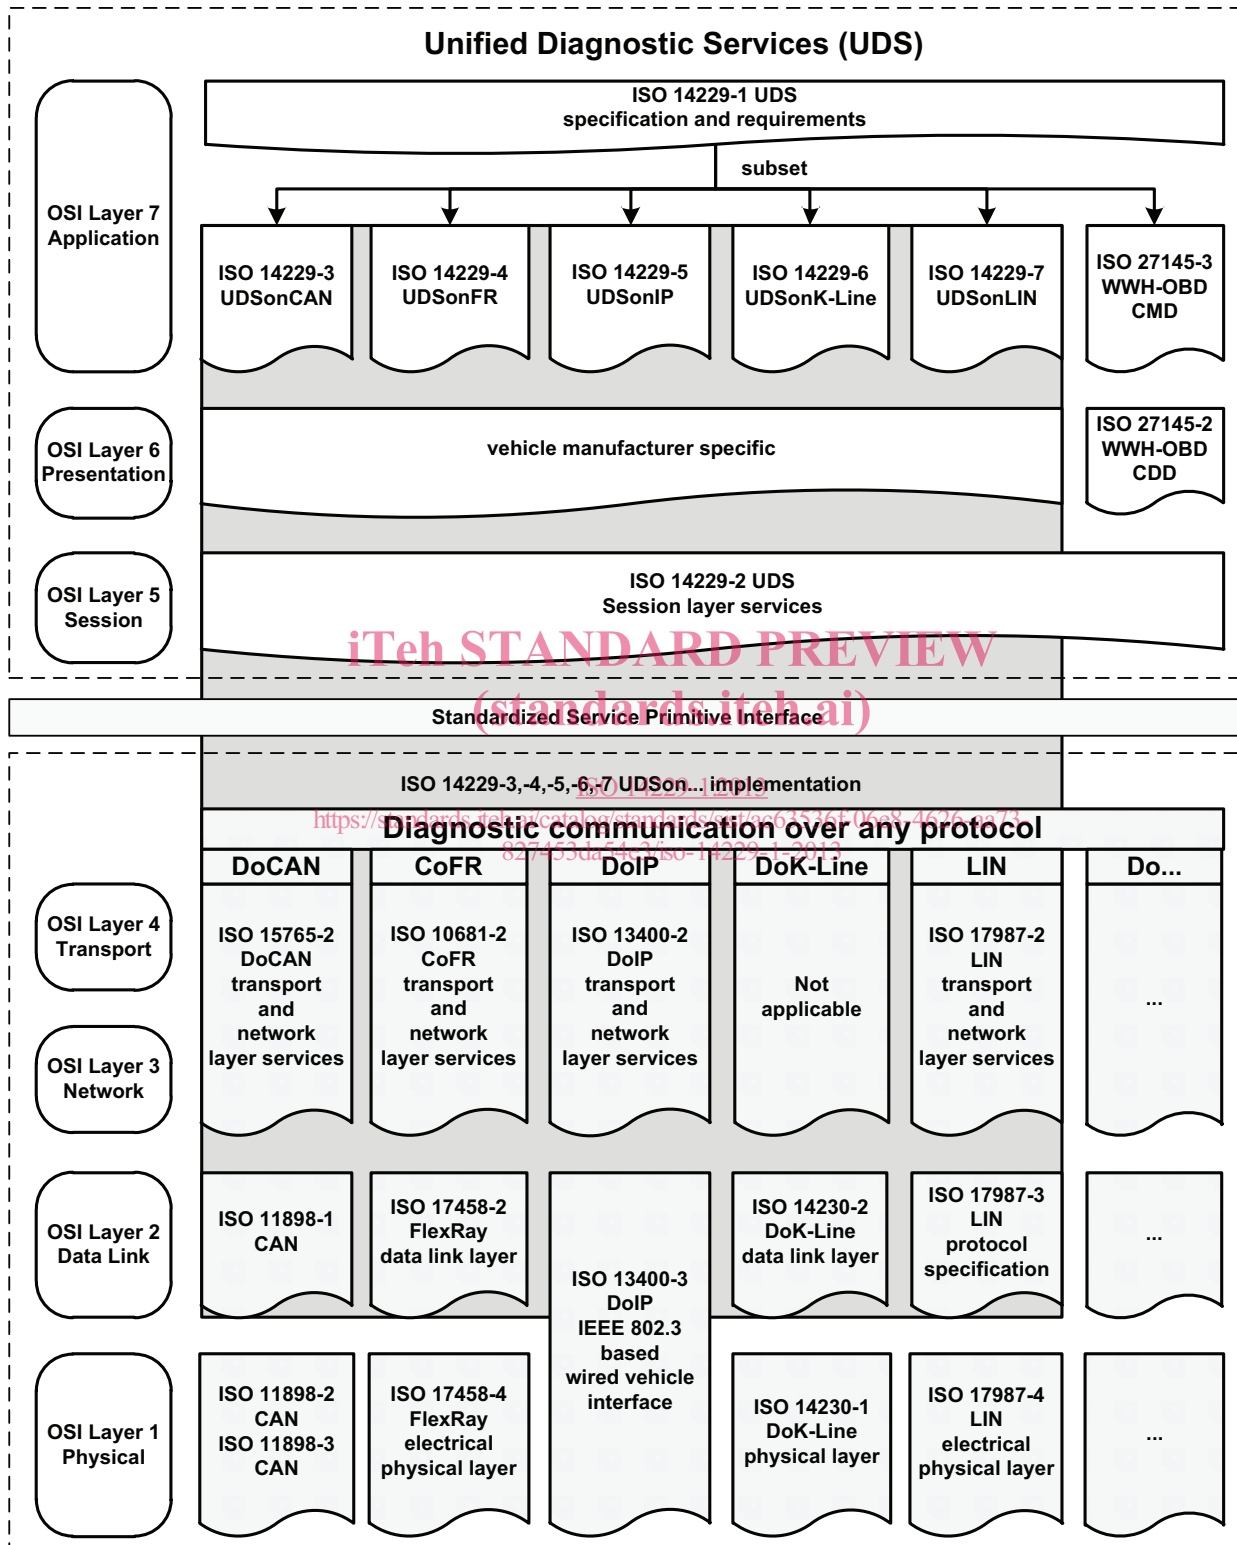


Figure 2 — Implementation of UDS document reference according to OSI model

6 Application layer services

6.1 General

Application layer services are usually referred to as diagnostic services. The application layer services are used in client-server based systems to perform functions such as test, inspection, monitoring or diagnosis of on-board vehicle servers. The client, usually referred to as external test equipment, uses the application layer services to request diagnostic functions to be performed in one or more servers. The server, usually a function that is part of an ECU, uses the application layer services to send response data, provided by the requested diagnostic service, back to the client. The client is usually an off-board tester, but can in some systems also be an on-board tester. The usage of application layer services is independent from the client being an off-board or on-board tester. It is possible to have more than one client in the same vehicle system.

The service access point of the diagnostics application layer provides a number of services that all have the same general structure. For each service, six service primitives are specified: a **service request primitive**, used by the client function in the diagnostic tester application, to pass data about a requested diagnostic service to the diagnostics application layer;

- a **service request primitive**, used by the client function in the diagnostic tester application, to pass data about a requested diagnostic service to the diagnostics application layer;
- a **service request-confirmation primitive**, used by the client function in the diagnostic tester application, to indicate that the data passed in the service request primitive is successfully sent on the vehicle communication bus the diagnostic tester is connected to
- a **service indication primitive**, used by the diagnostics application layer, to pass data to the server function of the ECU diagnostic application;
- a **service response primitive**, used by the server function in the ECU diagnostic application, to pass response data provided by the requested diagnostic service to the diagnostics application layer;
- a **service response-confirmation primitive**, used by the server function in the ECU diagnostic application, to indicate that the data passed in the service response primitive is successfully sent on the vehicle communication bus the ECU received the diagnostic request on;
- a **service confirmation primitive** used by the diagnostics application layer to pass data to the client function in the diagnostic tester application.