



DRAFT INTERNATIONAL STANDARD ISO/DIS 16126

ISO/TC 20/SC 14

Secretariat: **ANSI**

Voting begins on
2012-03-28

Voting terminates on
2012-08-28

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Space systems — Assessment of survivability of unmanned spacecraft against space debris and meteoroid impacts to ensure successful post-mission disposal

ICS 49.140

iTeh STANDARD PREVIEW
(standards.itih.ai)
Full standard:
<https://standards.itih.ai/catalog/standards/sist/3b36a3c8-890540e-8076-10ad41e5173b/iso-16126-2014>

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.

Pour accélérer la distribution, le présent document est distribué tel qu'il est parvenu du secrétariat du comité. Le travail de rédaction et de composition de texte sera effectué au Secrétariat central de l'ISO au stade de publication.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/3b36a3c8-8905-4d9e-8076-10ad41e5173b/iso-16126-2014>

Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

Contents

Page

1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	3
5 Impact survivability assessment requirements	3
6 Impact survivability assessment procedure	3
6.1 General	3
6.2 Definition of survivability requirement	3
6.3 Impact risk analysis	3
7 Procedure for performing a simple impact risk analysis	4
7.1 General	4
7.2 Spacecraft operating parameters and architecture design	5
7.3 Identification of critical components and surfaces	5
7.4 Ballistic limits	5
7.5 Failure probability analysis	5
7.6 Completion of analysis	6
8 Procedure for performing a detailed impact risk analysis	6
8.1 General	6
8.2 Spacecraft operating parameters and architecture design	6
8.3 Identification of critical components	6
8.4 Ballistic limits	7
8.5 Failure probability analysis	8
8.6 Iteration of analysis	8
Annex A	9
Annex B	11
Annex C	13
Annex D	15
Annex E	16
Bibliography	17

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 16126 was prepared by Technical Committee ISO/TC 20, AIRCRAFT AND SPACE VEHICLES, Subcommittee SC 14, SPACE SYSTEMS AND OPERATIONS.

Draft
iTech STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/siv/3b26a3c8-8905-4d9e-8076-10ad41e5173b/iso-16126-2014>

DRAFT

Space systems — Assessment of survivability of unmanned spacecraft against space debris and meteoroid impacts to ensure successful post-mission disposal

1 Scope

This International Standard defines requirements and a procedure for assessing the survivability of an unmanned spacecraft against space debris and meteoroid impacts to ensure the survival of critical components required to perform post-mission disposal. This standard also describes two impact risk analysis procedures that may be used to satisfy the requirements. The procedures are consistent with those defined in References [1] and [2].

This International Standard is part of a set of standards that collectively aim to reduce the growth of space debris by ensuring that spacecraft and launch vehicle orbital stages are designed, operated, and disposed of in a manner that prevents them from generating debris throughout their orbital lifetime. All of the primary debris mitigation requirements are contained in a top-level standard^[3]. The remaining standards, of which this is one, provide methods and processes to enable compliance with the primary requirements.

Although this International Standard can be applied during the design of a launch vehicle orbital stage, it is intended for use only during the design of an unmanned spacecraft.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 10795:2011, *Space systems — Programme management — Glossary of terms for use in ISO standards for space systems and operations*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 10795:2011 and the following apply.

3.1

at-risk area

area of those parts of a surface on a component that are most vulnerable to impacts from space debris or meteoroids

NOTE See Annex A.1 for a more detailed explanation of at-risk area.

3.2

ballistic limit

impact-induced threshold of failure of a structure

NOTE A common failure threshold is the critical size of an impacting particle at which perforation occurs. However, depending on the characteristics of the item being hit, failure modes other than perforation are also possible.

3.3

catastrophic collision

collision leading to the destruction by fragmentation of a spacecraft or launch vehicle orbital stage

3.4 critical component
component whose failure would prevent the completion of an essential function on a spacecraft or launch vehicle orbital stage, such as post-mission disposal

3.5 critical surface
<impact survivability> surface of a component which, when damaged by impact, will cause the component to fail

3.6 disposal
the actions performed by a spacecraft or launch vehicle orbital stage to permanently reduce its chance of accidental break-up, and to achieve its required long-term clearance of the protected regions

[ISO 24113:2011, definition 3.4]

3.7 impact survivability
ability of a spacecraft to function after being exposed to the space debris or meteoroid environment

NOTE A measure of impact survivability is the Probability of No Failure (PNF).

3.8 launch vehicle orbital stage
stage of a launch vehicle that is designed to achieve orbit

[ISO 24113:2011, definition 3.9]

3.9 lethal collision
collision leading to the loss of a critical component on a spacecraft or launch vehicle orbital stage

3.10 orbital lifetime
period of time from when a spacecraft or launch vehicle orbital stage achieves Earth orbit to when it commences re-entry

[ISO 24113:2011, definition 3.12]

3.11 protected region
region in space that is protected with regard to the generation of space debris to ensure its safe and sustainable use in the future

[ISO 24113:2011, definition 3.14]

3.12 re-entry
process in which atmospheric drag cascades deceleration of a spacecraft or launch vehicle orbital stage (or any part thereof), leading to its destruction or return to Earth

[ISO 24113:2011, definition 3.15]

3.13 space debris
orbital debris
all man-made objects including fragments and elements thereof, in Earth orbit or re-entering the atmosphere, that are non-functional

[ISO 24113:2011, definition 3.17]

3.14

spacecraft

system designed to perform specific tasks or functions in space

[ISO 24113:2011, definition 3.18]

4 Abbreviated terms

BLE	Ballistic Limit Equation
HVI	Hypervelocity Impact
IADC	Inter Agency Space Debris Coordination Committee
ISO	International Organization for Standardization
M/OD	Meteoroid / Orbital Debris
PNF	Probability of No Failure
PNP	Probability of No Perforation
S/C	Spacecraft

5 Impact survivability assessment requirements

5.1 During the design of a spacecraft, if an assessment is required to determine the survivability of the spacecraft against space debris and meteoroid impacts for the purpose of achieving successful post-mission disposal, then the procedure in Clause 6 shall be followed.

5.2 The results of an impact survivability assessment, the methodology used and any assumptions made, shall be approved by the customer of the spacecraft.

6 Impact survivability assessment procedure

6.1 General

Clauses 6.2 and 6.3 describe a procedure for assessing the space debris and meteoroid impact survivability of a spacecraft.

6.2 Definition of survivability requirement

6.2.1 Specify a requirement for the survivability of the spacecraft against space debris and meteoroid impacts for the purpose of achieving successful post-mission disposal.

6.2.2 Express the survivability requirement in terms of a minimum allowable value of impact-induced Probability of No Failure, PNF_{min} , over the operational phase of the spacecraft.

NOTE The operational phase of a spacecraft can be understood by referring to Annex B in Reference [3].

6.3 Impact risk analysis

6.3.1 Perform an impact risk analysis to determine and compare the impact-induced Probability of No Failure of the spacecraft, $PNF_{s/c}$, with the minimum allowable value, PNF_{min} .

6.3.2 If $PNF_{s/c} < PNF_{min}$, then take appropriate steps to reduce the impact risk.

NOTE Clauses 7 and 8 describe two procedures for analysing and reducing the impact risk.

7 Procedure for performing a simple impact risk analysis

7.1 General

7.1.1 A procedure for performing a simple analysis of the risk that a spacecraft will not be able to complete a successful post-mission disposal, as a result of impacts from space debris and meteoroids, is illustrated in Figure 1. The procedure, which is based on that recommended in Reference [1], is used to determine whether impacts from small size space debris and meteoroids could cause the failure of components that are critical for post-mission disposal. That is, the procedure is concerned with evaluating lethal collisions rather than catastrophic collisions. If the risk analysis shows that there is a significant probability of failure, then this indicates the need for a more rigorous analysis to determine and validate possible protection enhancements to the spacecraft, including the design of shielding. Clause 8 provides such an approach.

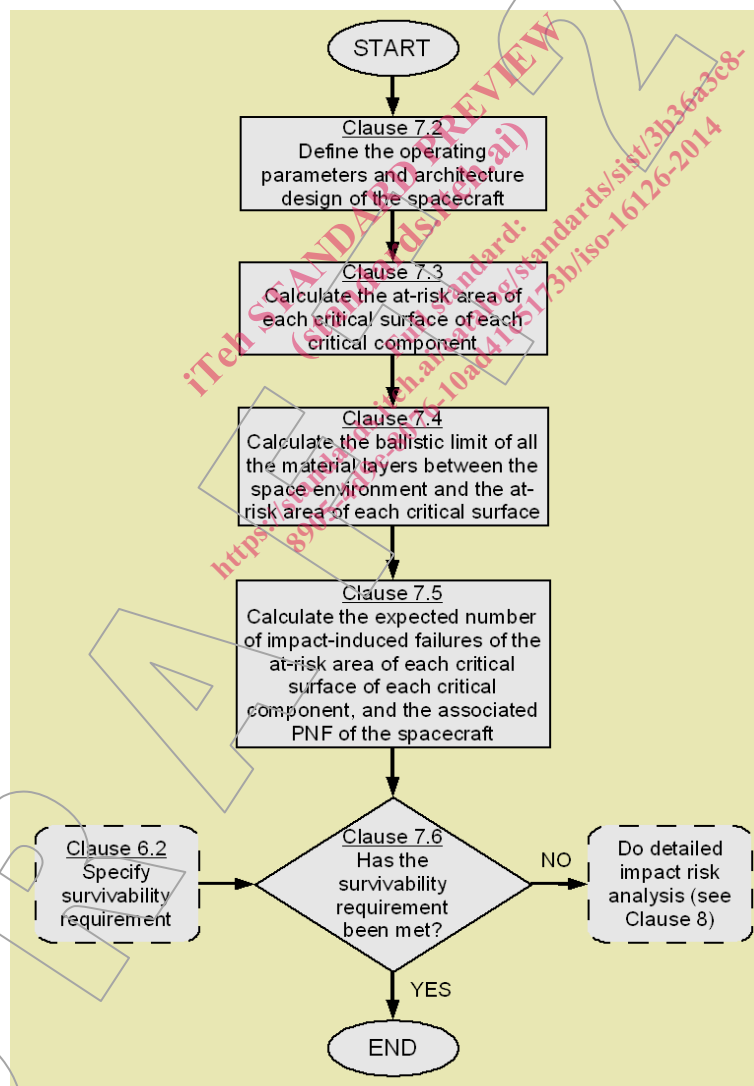


Figure 1 — Procedure for performing a simple analysis of the risk to a spacecraft from space debris and meteoroid impacts

7.1.2 Clauses 7.2 to 7.6 describe each step in the procedure.

7.2 Spacecraft operating parameters and architecture design

7.2.1 Define the operating parameters of the spacecraft, such as its orbit and attitude orientation relative to the direction of motion.

7.2.2 Define the architecture design of the spacecraft, such as its configuration and dimensions, and the material properties of each of its surfaces, including any shielding.

7.3 Identification of critical components and surfaces

7.3.1 Identify every component on the spacecraft that contributes to post-mission disposal.

7.3.2 For each component identified in Clause 7.3.1, determine its redundancy, impact damage modes and failure criteria.

7.3.3 Use a reliability analysis technique, such as Fault Tree Analysis or Failure Modes and Effects Analysis, to identify the system level consequences that might result when each of the components in Clause 7.3.2 is damaged by impact.

7.3.4 Identify the critical components, i.e. those components which, when damaged by impact, would prevent post-mission disposal.

7.3.5 For each critical component, identify its most critical surface.

7.3.6 For each critical component, calculate the at-risk area of its most critical surface.

NOTE Annex A.1 provides additional information on the calculation of at-risk area of a critical surface.

7.4 Ballistic limits

For each critical surface:

- a) identify other elements of the spacecraft, e.g. components and structures, that lie between the at-risk area of the critical surface and the space environment;
- b) in the direction that has the least intervening material protecting the at-risk area of the critical surface from the space environment, identify the thickness and density of each layer of the material and hence its areal density;
- c) in the direction that has the least intervening material protecting the at-risk area of the critical surface from the space environment, sum the areal densities of the material layers to obtain the total areal density between the at-risk area of the critical surface and the environment;
- d) calculate the minimum diameter of space debris or meteoroid impactor that will penetrate the total areal density of material between the at-risk area of the critical surface and the environment.

NOTE Annex A.2 provides additional information on the calculation of areal density and the minimum diameter of impactor that will penetrate a given areal density.

7.5 Failure probability analysis

7.5.1 For each critical surface, determine the expected number of impact-induced failures of the at-risk area of the critical surface.

7.5.2 Sum the expected number of impact-induced failures of the at-risk areas of all the critical surfaces to obtain the expected number of impact-induced failures of all the critical components.

7.5.3 Calculate the probability that one or more of the critical components will fail during the operational phase of the spacecraft as a result of impact with space debris or meteoroids, i.e. determine the impact-induced Probability of No Failure of the spacecraft, $PNF_{s/c}$, to achieve its post-mission disposal.

NOTE Annex A.3 provides additional information on the calculation of the expected number of impact-induced failures and the probability of failure.

7.6 Completion of analysis

7.6.1 If $PNF_{s/c} \geq PNF_{min}$, then end the analysis.

7.6.2 If $PNF_{s/c} < PNF_{min}$, then perform a more rigorous impact risk analysis.

NOTE Clause 8 describes a procedure for performing a detailed impact risk analysis.

8 Procedure for performing a detailed impact risk analysis

8.1 General

8.1.1 A procedure for performing a detailed analysis of the risk that a spacecraft will not be able to complete a successful post-mission disposal, as a result of impacts from small size space debris and meteoroids, is shown in Figure 2. Thus, the procedure is concerned with evaluating lethal collisions rather than catastrophic collisions. The procedure, which is based on that recommended in Reference [2], is used to provide a more accurate determination of the Probability of No Failure of the spacecraft, $PNF_{s/c}$, than that obtained in Clause 7. This is important when making decisions concerning the need for additional protection on the spacecraft and the design of that protection.

8.1.2 Figure 2 provides a simple illustration of the key steps in the procedure and the flow of information required between these steps. It is possible that the implementation of such a procedure in practice may be more complicated than that depicted in the figure.

8.1.3 Clauses 8.2 to 8.6 describe each step in the procedure.

8.2 Spacecraft operating parameters and architecture design

8.2.1 Define the operating parameters of the spacecraft, such as its orbit and attitude orientation relative to the direction of motion.

8.2.2 Define the architecture design of the spacecraft, such as its configuration and dimensions, and the material properties of each of its surfaces, including any shielding.

8.3 Identification of critical components

8.3.1 Identify every component on the spacecraft that contributes to post-mission disposal.

8.3.2 For each component identified in Clause 8.3.1, determine its redundancy, impact damage modes and failure criteria.

8.3.3 Use a reliability analysis technique, such as Fault Tree Analysis or Failure Modes and Effects Analysis, to identify the system level consequences that might result when each of the components in Clause 8.3.2 is damaged by impact.

8.3.4 Identify the critical components, i.e. those components which, when damaged by impact, would prevent post-mission disposal.