



**Wideband data transmission SRD;  
Harmonised Standard for access to radio spectrum;  
Part 2: Wideband data transmission devices:  
terminal node operating in the frequency bands 863 MHz to  
868 MHz and 915,8 MHz to 919,4 MHz**

[ETSI EN 304 220-2 V1.1.0 \(2022-09\)](#)

<https://standards.iteh.ai/catalog/standards/etsi/34789b28-b25d-4be6-9237-378ef2c42c4e/etsi-en-304-220-2-v1-1-0-2022-09>

---

Reference

DEN/ERM-TG28-557

---

Keywords

harmonised standard, SRD

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:  
<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](https://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at  
<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:  
<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:  
<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.  
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.  
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.  
All rights reserved.

---

## Contents

Intellectual Property Rights .....	8
Foreword.....	8
Modal verbs terminology.....	9
1 Scope .....	10
2 References .....	10
2.1 Normative references .....	10
2.2 Informative references.....	11
3 Definition of terms, symbols and abbreviations.....	12
3.1 Terms.....	12
3.2 Symbols.....	14
3.3 Abbreviations .....	14
4 Technical requirements specifications .....	15
4.1 Environmental profile.....	15
4.2 General performance criteria.....	15
4.3 Requirements for transmitters .....	16
4.3.1 Frequency error.....	16
4.3.1.1 Applicability.....	16
4.3.1.2 Description.....	16
4.3.1.3 Limits .....	16
4.3.1.4 Conformance .....	16
4.3.2 Effective radiated power.....	16
4.3.2.1 Applicability.....	16
4.3.2.2 Description .....	16
4.3.2.3 Limits .....	16
4.3.2.4 Conformance .....	16
4.3.3 Occupied bandwidth .....	16
4.3.3.1 Applicability.....	16
4.3.3.2 Description .....	16
4.3.3.3 Limits .....	17
4.3.3.4 Conformance .....	17
4.3.4 Transmitter spectrum emission mask.....	17
4.3.4.1 Applicability.....	17
4.3.4.2 Description .....	17
4.3.4.3 Limits .....	17
4.3.4.4 Conformance .....	18
4.3.5 Transmitter unwanted emissions in the spurious domain .....	18
4.3.5.1 Applicability.....	18
4.3.5.2 Description .....	18
4.3.5.3 Limits .....	18
4.3.5.4 Conformance .....	18
4.3.6 Duty cycle .....	18
4.3.6.1 Applicability.....	18
4.3.6.2 Description .....	18
4.3.6.3 Limits .....	19
4.3.6.4 Conformance .....	19
4.3.7 Transient power .....	19
4.3.7.1 Applicability.....	19
4.3.7.2 Description .....	19
4.3.7.3 Limits .....	19
4.3.7.4 Conformance .....	19
4.4 Requirements for receivers.....	19
4.4.1 Receiver sensitivity.....	19
4.4.1.1 Applicability.....	19
4.4.1.2 Description .....	19

4.4.1.3	Limits .....	20
4.4.1.4	Conformance .....	20
4.4.2	Adjacent channel selectivity .....	20
4.4.2.1	Applicability.....	20
4.4.2.2	Description .....	20
4.4.2.3	Limits .....	20
4.4.2.4	Conformance .....	20
4.4.3	Receiver spurious response rejection.....	20
4.4.3.1	Applicability.....	20
4.4.3.2	Description .....	21
4.4.3.3	Limits .....	21
4.4.3.4	Conformance .....	21
4.4.4	Blocking.....	21
4.4.4.1	Applicability.....	21
4.4.4.2	Description .....	21
4.4.4.3	Limits .....	21
4.4.4.4	Conformance .....	21
4.4.5	Receiver spurious emission .....	21
4.4.5.1	Applicability.....	21
4.4.5.2	Description .....	21
4.4.5.3	Limits .....	22
4.4.5.4	Conformance .....	22
4.4.6	Receiver maximum input signal level.....	22
4.4.6.1	Applicability.....	22
4.4.6.2	Description .....	22
4.4.6.3	Limits .....	22
4.4.6.4	Conformance .....	22
4.5	Requirements for spectrum access .....	22
4.5.1	Clear channel assessment threshold.....	22
4.5.1.1	Applicability.....	22
4.5.1.2	Description .....	22
4.5.1.3	Limits .....	23
4.5.1.4	Conformance.....	23
4.5.2	Listen Before Talk .....	23
4.5.2.1	Applicability.....	23
4.5.2.2	Description .....	23
4.5.2.3	Limits .....	23
4.5.2.4	Conformance .....	24
4.6	Functional Requirements.....	24
4.6.1	Operation under Master Network Access Point (NAP) control.....	24
4.6.1.1	Applicability.....	24
4.6.1.2	Description .....	24
4.6.1.3	Limits .....	24
4.6.1.4	Conformance .....	24
5	Testing for compliance with technical requirements.....	24
5.1	Environmental conditions for testing .....	24
5.2	General conditions for testing .....	25
5.2.1	General considerations.....	25
5.2.2	Presentation of equipment for testing purposes .....	25
5.2.2.1	General Considerations .....	25
5.2.2.2	Choice of model for testing.....	25
5.2.2.2.1	General considerations .....	25
5.2.2.2.2	EUT with an external RF connector .....	25
5.2.2.2.3	EUT without an external RF connector .....	25
5.2.2.3	Testing of modular equipment .....	26
5.2.3	Test power source .....	26
5.2.3.1	General.....	26
5.2.3.2	External test power source .....	26
5.2.3.3	Internal test power source .....	26
5.2.4	Thermal test conditions.....	26
5.2.5	Conducted measurements .....	26

5.2.5.1	Artificial antenna.....	26
5.2.6	Radiated measurements .....	27
5.2.7	Applicable measurement methods .....	27
5.2.8	Test signals for data .....	28
5.2.9	Measuring receiver .....	28
5.2.9.1	Description .....	28
5.2.9.2	Reference bandwidth.....	29
5.3	Conformance methods of measurement for transmitters.....	29
5.3.1	Frequency error.....	29
5.3.1.1	Test conditions .....	29
5.3.1.2	Radiated measurement .....	30
5.3.1.3	Conducted measurement .....	30
5.3.1.4	Measurement procedure for D-M1 test signal.....	30
5.3.1.5	Measurement procedure for other test signal .....	30
5.3.2	Effective radiated power .....	31
5.3.2.1	Effective Radiated Power (conducted measurement).....	31
5.3.2.1.0	General .....	31
5.3.2.1.1	Test conditions .....	31
5.3.2.1.2	Measurement procedure .....	31
5.3.2.2	Effective radiated power (radiated measurement).....	32
5.3.2.2.0	General .....	32
5.3.2.2.1	Test conditions .....	32
5.3.2.2.2	Measurement procedure .....	32
5.3.3	Occupied bandwidth .....	32
5.3.3.1	Test conditions .....	32
5.3.3.2	Radiated measurement .....	33
5.3.3.3	Conducted measurement .....	33
5.3.3.4	Measurement procedure .....	33
5.3.4	Transmitter spectrum emission mask.....	34
5.3.4.1	Test conditions .....	34
5.3.4.2	Radiated measurement .....	34
5.3.4.3	Conducted measurement .....	34
5.3.4.4	Measurement procedure .....	34
5.3.5	Transmitter unwanted emission in the spurious domain.....	34
5.3.5.1	Test conditions .....	34
5.3.5.2	Radiated measurement .....	35
5.3.5.3	Conducted measurement .....	35
5.3.5.4	Measurement procedure .....	35
5.3.5.4.1	Pre-scan .....	35
5.3.5.4.2	Measurement of the emissions identified during the pre-scan.....	36
5.3.6	Duty cycle.....	37
5.3.6.1	Test conditions .....	37
5.3.6.2	Radiated measurement .....	37
5.3.6.3	Conducted measurement .....	37
5.3.6.4	Measurement procedure .....	38
5.3.7	Transient power .....	38
5.3.7.1	Test conditions .....	38
5.3.7.2	Radiated measurement .....	38
5.3.7.3	Conducted measurement .....	38
5.3.7.4	Measurement procedure .....	39
5.4	Conformance test suites for receivers.....	40
5.4.1	Receiver sensitivity.....	40
5.4.1.1	Test Conditions .....	40
5.4.1.2	Radiated measurement .....	40
5.4.1.3	Conducted measurement .....	40
5.4.1.4	Measurement procedure .....	40
5.4.2	Adjacent channel selectivity .....	41
5.4.2.1	Test conditions .....	41
5.4.2.2	Radiated measurement .....	41
5.4.2.3	Conducted measurement .....	41
5.4.2.4	Measurement procedure .....	41
5.4.3	Receiver spurious response rejection.....	42

5.4.3.1	Test conditions .....	42
5.4.3.2	Radiated measurement .....	42
5.4.3.3	Conducted measurement .....	42
5.4.3.4	Measurement procedure .....	43
5.4.4	Blocking .....	43
5.4.4.1	Test conditions .....	43
5.4.4.2	Radiated measurement .....	44
5.4.4.3	Conducted measurement .....	44
5.4.4.4	Measurement procedure .....	44
5.4.5	Receiver spurious emission .....	45
5.4.5.1	Test conditions .....	45
5.4.5.2	Radiated measurement .....	45
5.4.5.3	Conducted measurement .....	45
5.4.5.4	Measurement procedure .....	45
5.4.5.4.1	Conducted measurement .....	45
5.4.5.4.2	Radiated measurement .....	46
5.4.6	Receiver maximum input signal level .....	46
5.4.6.1	Test conditions .....	46
5.4.6.2	Radiated measurement .....	46
5.4.6.3	Conducted measurement .....	47
5.4.6.4	Measurement procedure .....	47
5.5	Conformance test suites for spectrum access .....	48
5.5.1	Clear channel assessment threshold .....	48
5.5.1.1	Test conditions .....	48
5.5.1.2	Radiated measurement .....	48
5.5.1.3	Conducted measurement .....	48
5.5.1.4	Measurement procedure .....	49
5.5.2	Listen Before Talk .....	50
5.5.2.1	Test conditions .....	50
5.5.2.2	Radiated measurement .....	50
5.5.2.3	Conducted measurement .....	50
5.5.2.4	Measurement procedure .....	50
5.6	Operation under Master Network Access Point (NAP) control .....	52
5.6.1	Test conditions .....	52
5.6.2	Radiated measurement .....	52
5.6.3	Conducted measurement .....	53
5.6.4	Measurement procedure .....	53

<b>Annex A (informative):</b>	<b>Relationship between the present document and the essential requirements of Directive 2014/53/EU .....</b>	<b>55</b>
-------------------------------	---	-----------

<b>Annex B (normative):</b>	<b>Test sites and arrangements for radiated measurement .....</b>	<b>57</b>
-----------------------------	---	-----------

B.1	General considerations .....	57
B.2	Radiation test sites .....	57
B.2.1	Open Area Test Site (OATS) .....	57
B.2.2	Semi Anechoic Room .....	58
B.2.3	Fully Anechoic Room (FAR) .....	59
B.2.4	Measurement Distance .....	60
B.3	Antenna .....	61
B.3.1	General considerations .....	61
B.3.2	Measurement antenna .....	61
B.3.3	Substitution antenna .....	61
B.4	Guidance on the use of radiation test sites .....	62
B.4.1	General considerations .....	62
B.4.2	Power supplies for the battery powered EUT .....	62
B.4.3	Site preparation .....	62
B.5	Coupling of signals .....	62
B.5.1	General .....	62
B.5.2	Data signals .....	63

B.6	Measurement procedures for radiated measurement .....	63
B.6.1	General considerations .....	63
B.6.2	Radiated measurements in an OATS or SAR.....	63
B.6.3	Radiated measurements in a FAR .....	64
B.6.4	Substitution measurement .....	64
B.6.5	Radiated measurement methods for receivers .....	64
B.7	Guidance for testing radiated technical requirements .....	64
B.7.0	General .....	64
B.7.1	Radio test suites and corresponding test sites.....	65
<b>Annex C (informative):</b>	<b>Selection of receiver parameters.....</b>	<b>66</b>
C.0	Introduction .....	66
C.1	Receiver sensitivity .....	66
C.2	Receiver co-channel rejection .....	66
C.3	Receiver adjacent signal selectivity .....	66
C.4	Receiver spurious response rejection .....	66
C.5	Receiver blocking.....	66
C.6	Receiver radio-frequency intermodulation.....	67
C.7	Receiver dynamic range .....	67
C.8	Desensitization .....	67
C.9	Receiver unwanted emissions in the spurious domain .....	67
<b>Annex D (normative):</b>	<b>(<math>T_{on}</math> time measurements / / standards. it D o c u m e n t i e P w r)</b>	<b>68</b>
D.1	Measurement procedure .....	68
D.2	$T_{Disregard}$ procedure .....	68
<b>Annex E (normative):</b>	<b>Test fixture .....</b>	<b>70</b>
E.1	: General considerations .....	70
E.2	Validation of the test-fixture in the temperature chamber.....	71
E.3	Mode of use .....	72
<b>Annex F (informative):</b>	<b>Properties of EUT .....</b>	<b>73</b>
<b>Annex G (informative):</b>	<b>Maximum Measurement Uncertainty.....</b>	<b>74</b>
<b>Annex H (informative):</b>	<b>Bibliography .....</b>	<b>75</b>
	History .....	76

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™, PLUGTESTS™, UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the **GSM** logo are trademarks registered and owned by the GSM Association.

---

## Foreword

(<https://standards.iten.ai>)

### Document Preview

This draft Harmonised European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Vote phase of the Standardisation Request deliverable Approval Procedure.

<https://standards.iten.ai> | ETSI EN 304 220-2 V1.1.0 (2022-09)

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.3] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.1].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in Table A-1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

The present document is part 2 of a multi-part deliverable covering Wideband data transmission SRD; Harmonised Standard for access to radio spectrum, as identified below:

Part 1: "Wideband data transmission devices: network access points operating in the frequency range 863 MHz to 868 MHz and 915,8 MHz to 919,4 MHz".

Part 2: "Wideband data transmission devices: terminal node operating in designated bands 863 MHz to 868 MHz and 915,8 MHz to 919,4 MHz".

<b>Proposed national transposition dates</b>	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

## Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are NOT allowed in ETSI deliverables except when used in direct citation.

i T h S t a n d a r d s  
( [h t t p s : / / s t a n d a r d s . i t e h . a i / c a t a l o g / s t a n d a r d s . i t](https://standards.itelai.cat/) )  
D o c u m e e P w r

[E T S I E N 1 3 0 4 0 2 \( 2 0 0 - 2 2 - 0 9 \)](https://standards.itelai.cat/)

h t t p s : / / s t a n d a r d s . i t e h . a i / c a t a l o g / s t a n d a r d s . i t

# 1 Scope

The present document specifies technical characteristics and test methods to be used in the conformance assessment of wideband data transmission Short Range Device (SRD) terminal node equipment in the frequency range 863 MHz to 868 MHz and 915,8 MHz to 919,4 MHz. The wideband data transmission device category covers radio devices that use wideband modulation techniques to access the spectrum. The present document specifies technical characteristics and methods of measurements for equipment operated in the following designated frequency bands given in Table 1-1.

**Table 1-1: Designated frequency bands**

<b>SRD frequency bands</b>	
863 MHz to 868 MHz	According to band no 84 of Commission Implementing Decision (EU) 2022/180 [i.7] and Annex 3 band a1 of CEPT/ERC/REC 70 03 [i.2].
915,8 MHz to 919,4 MHz	According to band a2 of Annex 3 of CEPT/ERC/REC 70 03 [i.2].
917,4 MHz to 919,4 MHz	According to band no 2 of Commission Implementing Decision (EU) 2022/172 [i.8].

In the designated bands the following types of equipment are defined:

Type 1: Wideband Data Transmission Terminal Node (TN) in data networks in 863,0 MHz to 868,0 MHz.

Type 2: Wideband Data Transmission Terminal Node (TN) in data network in 915,8 MHz to 919,4 MHz and in 917,4 MHz to 919,4 MHz:

1) Type 2a: Nomadic Terminal Node (TN) of Type 2 or Mobile Terminal Node (TN) of Type 2.

NOTE 1: The availability of the frequency bands for type 2 equipment in the European Union and CEPT countries can be obtained from EFIS (<https://efis.cept.org/>) and is also listed in Appendices 1 and 3 of CEPT/ERC/REC 70 03 [i.2].

In addition, it should be noted that, in some countries, part or all of the bands for type 2 equipment may be unavailable, and/or other frequency bands may be available, for networked and/or network based short range devices. See National Radio Interfaces (NRI) as relevant for additional guidance.

NOTE 2: The relationship between the present document and essential requirements of article 3.2 of Directive 2014/53/EU [i.1] is given annex A.

# 2 References

## 2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

Not applicable.

## 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] [Directive 2014/53/EU](#) of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.
- [i.2] [CEPT/ERC/REC 70-03 \(12 February 2022\)](#): "Relating to the use of Short Range Devices (SRD)".
- [i.3] [Commission Implementing Decision C\(2015\) 5376 final of 4.8.2015](#) on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.
- [i.4] [ECC Report 261 \(01-2017\)](#): "Short Range Devices in the frequency range 862-870 MHz".
- [i.5] [ECC Report 246 \(01-2017\)](#): "Wideband and Higher DC Short Range Devices in 870-875.8 MHz and 915.2-920.8 MHz (companion to ECC Report 200)".
- [i.6] Recommendation ITU-T O.153 (10/92): "Basic parameters for the measurement of error performance at bit rates below the primary rate".
- [i.7] [Commission Implementing Decision \(EU\) 2022/180](#) amending Decision 2006/771/EC on harmonisation of the radio spectrum for use by short-range devices and repealing Decision 2006/804/EC.
- [i.8] [Commission Implementing Decision \(EU\) 2022/172 of 7 February 2022](#) amending Implementing Decision (EU) 2018/1538 on the harmonisation of radio spectrum for use by short-range devices within the 874-876 and 915-921 MHz frequency bands.
- [i.9] [ERC Recommendation 74-01 \( October 2021\)](#): "Unwanted Emission in the spurious domain".
- [i.10] EN 55016-1-1 (2019): "Specification for radio disturbance and immunity measuring apparatus and methods; Part 1: Radio disturbance and immunity measuring apparatus - Measuring apparatus" (produced by CENELEC).
- [i.11] ETSI TR 100 028 (all parts) (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [i.12] ETSI EN 304 220-1 (V1.1.0): "Wideband data transmission SRD operating in the frequency range 25 MHz to 1 000 MHz; Harmonised Standard for access to radio spectrum; Part 1: Wideband data transmission devices: network access point operating in designated bands".
- [i.13] ETSI TR 102 273-2: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties; Part 2: Anechoic chamber".
- [i.14] ETSI TR 102 273-3: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties; Part 3: Anechoic chamber with a ground plane".
- [i.15] ETSI TR 102 273-4: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties; Part 4: Open area test site".

- [i.16] ETSI EG 203 336 (V1.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Guide for the selection of technical parameters for the production of Harmonised Standards covering article 3.1(b) and article 3.2 of Directive 2014/53/EU".

## 3 Definition of terms, symbols and abbreviations

### 3.1 Terms

For the purposes of the present document, the following terms apply:

**adjacent channel:** frequency range equal to the width of the operating channel immediately above and immediately below the operating channel

NOTE: See Figure 3.1-1.

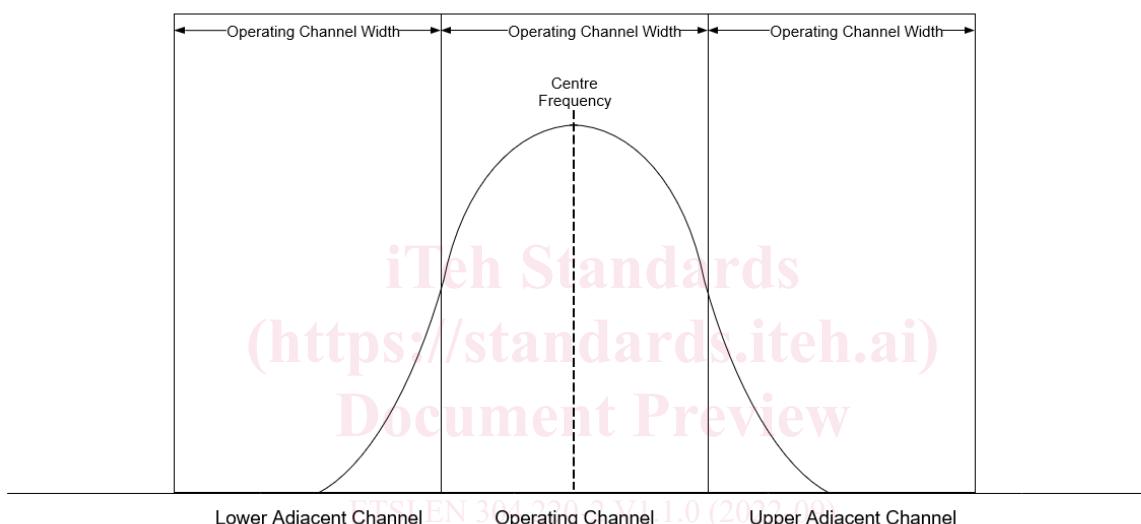


Figure 3.1-1: Adjacent channel definitions

**centre frequency:** centre frequency of the transmitted signal

**Clear Channel Assessment (CCA):** procedure of sensing the operating channel to determine whether or not it is occupied by a transmission

**conducted measurements:** measurements which are made using a direct  $50\ \Omega$  connection to the equipment under test

**continuous transmission:** modulated transmission without interruption for the period of the test

**data network:** group of wirelessly communicating SRDs composed of a network access point and one or more terminal nodes

**dedicated antenna:** removable antenna supplied and tested with the radio equipment, designed as an indispensable part of the equipment

**dialog:** repeated transmit-response cycle between two devices within a transmission

**disregard time ( $T_{Disregard}$ ):** interval below which two separate radio emissions in a channel are considered a single continuous transmitted burst

**duty cycle:** ratio, expressed as a percentage, of the cumulative duration of transmissions in an observation bandwidth within an observation interval divided by the observation interval

**fixed SRD:** SRD able to operate only at a fixed geographical location

**integral antenna:** permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment

**Listen Before Talk (LBT):** mechanism by which an equipment applies Clear Channel Assessment (CCA) before transmission (also known as Listen Before Transmit)

**master NAP:** NAP which enables the operation of nomadic and/or mobile devices

NOTE: Nomadic and mobile terminal nodes (type 2a) are under the control of master NAP in the frequency range of 915,8 MHz to 919,4 MHz and of 917,4 MHz to 919,4 MHz in Europe [i.2] and [i.8].

**maximum transmission duration (T<sub>On-Max</sub>):** longest permitted transmission

**minimum inter-transmission interval (T<sub>Off-Min</sub>):** minimum interval in a channel between two transmissions by the same device

**mobile equipment:** equipment in operation while moving

**Network Access Point (NAP):** fixed terrestrial SRD connecting one or more terminal nodes to an external network or service

NOTE: Harmonised standard ETSI EN 304 220-1 [i.12] addresses NAP equipment.

**network control information:** data intended to construct or maintain a data network

**network data:** application data carried over a data network

**nomadic equipment:** equipment for which the location may change but is stationary while in use

**nominal operating frequency:** frequency at mid-point of the Operating Channel

**observation bandwidth:** bandwidth in which the energy of an equipment is considered for the purposes of assessing transmission timings

**observation period:** reference interval of time

**occupied bandwidth:** width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to 0,5 % of the total mean power of a given emission

NOTE: See Figure 3.1-2. [ETSI EN 304 220-2 V1.1.0 \(2022-09\)](#)

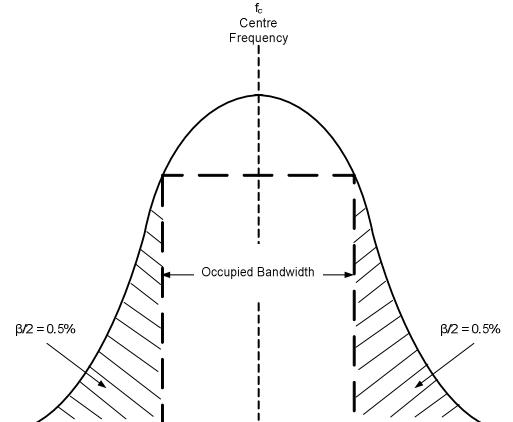


Figure 3.1-2: Signal Occupied Bandwidth

**operating channel:** frequency range in which transmissions occur

**operating channel width:** difference between frequency values of the high and low operating channel edges

**Permitted Frequency Band (PFB):** frequency band or sub-band within which the device is authorized to operate and to perform the intended function of the equipment

**radiated measurements:** measurements which involve the absolute measurement of a radiated electromagnetic field

**signal threshold ( $P_{\text{Threshold}}$ ):** absolute signal level (in dBm) above which a transmission is considered to exist for a given receiver bandwidth

**Terminal Node (TN):** SRD generating and/or consuming network data

**transmission:** continuous radio emission, or sequence of emissions each separated by an interval  $< T_{\text{Disregard}}$ , with a signal level greater than the signal threshold in an operating channel

NOTE: See Figure 3.1-3.

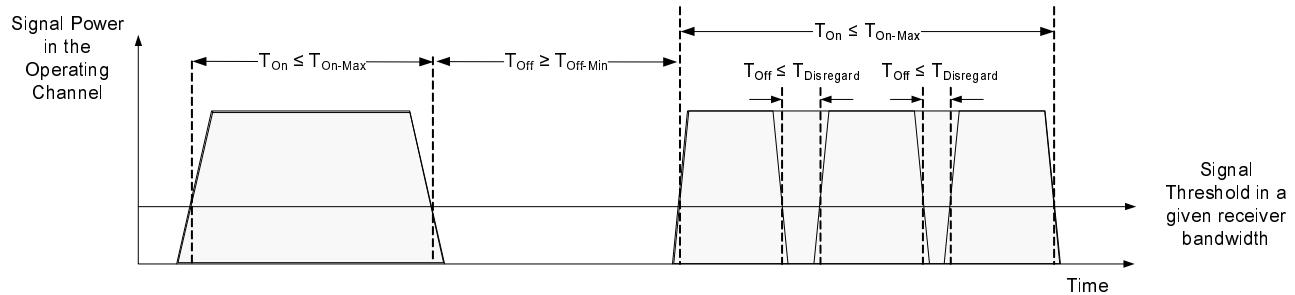


Figure 3.1-3: Transmission definitions

## 3.2 Symbols

For the purposes of the present document, the following symbols apply:

dB	decibel
dBc	dB relative to the carrier
dBm	power level unit expressed in decibel with reference to one milliwatt
kbps	kilobits per second
Mbps	Megabits per second
p	probability of bit error
ppm	frequency error relative to desired frequency expressed in parts per million
R	data rate
S	sensitivity of receiver
$T_F$	fixed listening time in CCA
$T_L$	total listening time in CCA
$T_{PS}$	pseudo random listening time in CCA
$T_{MRI}$	maximum response interval in CCA
$T_{MRD}$	maximum response duration in CCA
$\lambda$	wavelength

## 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACS	Adjacent Channel Selectivity
ARQ	Automatic Repeat reQuest
BER	Bit Error Ratio
CCA	Clear Channel Assessment
CEPT	European Conference of Postal and Telecommunications Administrations
CF	Centre Frequency
e.r.p.	effective radiated power
EC	European Commission
ECC	Electronic Communications Committee
EFIS	European Communications Office Frequency Information System
EU	European Union
EUT	Equipment Under Test
FAR	Fully Anechoic Room
FEC	Forward Error Correction