



SLOVENSKI STANDARD
oSIST prEN 304 220-2 V1.1.0:2022
01-november-2022

Širokopasovni sistemi za prenos podatkov SRD, ki delujejo v frekvenčnem območju od 25 MHz do 1000 MHz - Harmonizirani standard za dostop do radijskega spektra - 2. del: Širokopasovne naprave za prenos podatkov: terminalsko vozlišče, ki deluje v določenih pasovih

Wideband data transmission SRD operating in the frequency range 25 MHz to 1 000 MHz - Harmonised Standard for access to radio spectrum - Part 2: Wideband data transmission devices: terminal node operating in designated bands

(standards.iteh.ai)

[oSIST prEN 304 220-2 V1.1.0:2022](#)

<https://standards.iteh.ai/catalog/standards/sist/3acf9aeb-a44f-4b6c-8522-2b0aa6b80b5b/osist-pr-en-304-220-2-v1-1-0-2022>

Ta slovenski standard je istoveten z: ETSI EN 304 220-2 V1.1.0 (2022-09)

ICS:

33.060.01	Radijske komunikacije na splošno	Radiocommunications in general
-----------	----------------------------------	--------------------------------

oSIST prEN 304 220-2 V1.1.0:2022 en

Draft ETSI EN 304 220-2 V1.1.0 (2022-09)



**Wideband data transmission SRD operating in
the frequency range 25 MHz to 1 000 MHz;
Harmonised Standard for access to radio spectrum;
Part 2: Wideband data transmission devices:
terminal node operating in designated bands**

<https://standards.iteh.ai/catalog/standards/sist/3aef9acb-a44f-4b6c-8522-2b0aa6b80b5b/osist-pren-304-220-2-v1-1-0-2022>

Reference

DEN/ERM-TG28-557

Keywords

harmonised standard, SRD

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://standards.etsi.org/submit-a-comment.aspx?commentid=4b6c-8522>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.
All rights reserved.

Contents

Intellectual Property Rights	8
Foreword.....	8
Modal verbs terminology.....	9
1 Scope	10
2 References	10
2.1 Normative references	10
2.2 Informative references.....	11
3 Definition of terms, symbols and abbreviations.....	12
3.1 Terms.....	12
3.2 Symbols.....	14
3.3 Abbreviations	14
4 Technical requirements specifications	15
4.1 Environmental profile.....	15
4.2 General performance criteria.....	15
4.3 Requirements for transmitters	16
4.3.1 Frequency error.....	16
4.3.1.1 Applicability.....	16
4.3.1.2 Description.....	16
4.3.1.3 Limits	16
4.3.1.4 Conformance.....	16
4.3.2 Effective radiated power.....	16
4.3.2.1 Applicability.....	16
4.3.2.2 Description	16
4.3.2.3 Limits	16
4.3.2.4 Conformance.....	16
4.3.3 Occupied bandwidth	16
4.3.3.1 Applicability.....	16
4.3.3.2 Description	16
4.3.3.3 Limits	17
4.3.3.4 Conformance	17
4.3.4 Transmitter spectrum emission mask.....	17
4.3.4.1 Applicability.....	17
4.3.4.2 Description	17
4.3.4.3 Limits	17
4.3.4.4 Conformance	18
4.3.5 Transmitter unwanted emissions in the spurious domain	18
4.3.5.1 Applicability.....	18
4.3.5.2 Description	18
4.3.5.3 Limits	18
4.3.5.4 Conformance	18
4.3.6 Duty cycle	18
4.3.6.1 Applicability.....	18
4.3.6.2 Description	18
4.3.6.3 Limits	19
4.3.6.4 Conformance	19
4.3.7 Transient power	19
4.3.7.1 Applicability.....	19
4.3.7.2 Description	19
4.3.7.3 Limits	19
4.3.7.4 Conformance	19
4.4 Requirements for receivers.....	19
4.4.1 Receiver sensitivity.....	19
4.4.1.1 Applicability.....	19
4.4.1.2 Description	19

4.4.1.3	Limits	20
4.4.1.4	Conformance	20
4.4.2	Adjacent channel selectivity	20
4.4.2.1	Applicability.....	20
4.4.2.2	Description	20
4.4.2.3	Limits	20
4.4.2.4	Conformance	20
4.4.3	Receiver spurious response rejection.....	20
4.4.3.1	Applicability.....	20
4.4.3.2	Description	21
4.4.3.3	Limits	21
4.4.3.4	Conformance	21
4.4.4	Blocking.....	21
4.4.4.1	Applicability.....	21
4.4.4.2	Description	21
4.4.4.3	Limits	21
4.4.4.4	Conformance	21
4.4.5	Receiver spurious emission	21
4.4.5.1	Applicability.....	21
4.4.5.2	Description	21
4.4.5.3	Limits	22
4.4.5.4	Conformance	22
4.4.6	Receiver maximum input signal level.....	22
4.4.6.1	Applicability.....	22
4.4.6.2	Description	22
4.4.6.3	Limits	22
4.4.6.4	Conformance	22
4.5	Requirements for spectrum access	22
4.5.1	Clear channel assessment threshold.....	22
4.5.1.1	Applicability.....	22
4.5.1.2	Description	22
4.5.1.3	Limits	23
4.5.1.4	Conformance.....	23
4.5.2	Listen before talk.....	23
4.5.2.1	Applicability.....	23
4.5.2.2	Description	23
4.5.2.3	Limits	23
4.5.2.4	Conformance	24
4.6	Functional Requirements.....	24
4.6.1	Operation under Master Network Access Point (NAP) control.....	24
4.6.1.1	Applicability.....	24
4.6.1.2	Description	24
4.6.1.3	Limits	24
4.6.1.4	Conformance	24
5	Testing for compliance with technical requirements.....	24
5.1	Environmental conditions for testing	24
5.2	General conditions for testing	25
5.2.1	General considerations.....	25
5.2.2	Presentation of equipment for testing purposes	25
5.2.2.1	General Considerations	25
5.2.2.2	Choice of model for testing.....	25
5.2.2.2.1	General considerations	25
5.2.2.2.2	EUT with an external RF connector	25
5.2.2.2.3	EUT without an external RF connector	25
5.2.2.3	Testing of modular equipment	26
5.2.3	Test power source	26
5.2.3.1	General	26
5.2.3.2	External test power source	26
5.2.3.3	Internal test power source	26
5.2.4	Thermal test conditions.....	26
5.2.5	Conducted measurements	26

5.2.5.1	Artificial antenna.....	26
5.2.6	Radiated measurements	27
5.2.7	Applicable measurement methods	27
5.2.8	Test signals for data	28
5.2.9	Measuring receiver	29
5.2.9.1	Description	29
5.2.9.2	Reference bandwidth.....	29
5.3	Conformance methods of measurement for transmitters.....	30
5.3.1	Frequency error.....	30
5.3.1.1	Test conditions	30
5.3.1.2	Radiated measurement	30
5.3.1.3	Conducted measurement	30
5.3.1.4	Measurement procedure for D-M1 test signal.....	30
5.3.1.5	Measurement procedure for other test signal	31
5.3.2	Effective radiated power	31
5.3.2.1	Effective Radiated Power (conducted measurement).....	31
5.3.2.1.0	General	31
5.3.2.1.1	Test conditions	31
5.3.2.1.2	Measurement procedure	32
5.3.2.2	Effective radiated power (radiated measurement).....	32
5.3.2.2.0	General	32
5.3.2.2.1	Test conditions	32
5.3.2.2.2	Measurement procedure	32
5.3.3	Occupied bandwidth	33
5.3.3.1	Test conditions	33
5.3.3.2	Radiated measurement	33
5.3.3.3	Conducted measurement	33
5.3.3.4	Measurement procedure	33
5.3.4	Transmitter spectrum emission mask.....	34
5.3.4.1	Test conditions	34
5.3.4.2	Radiated measurement	34
5.3.4.3	Conducted measurement	34
5.3.4.4	Measurement procedure	34
5.3.5	Transmitter unwanted emission in the spurious domain.....	35
5.3.5.1	Test conditions	35
5.3.5.2	Radiated measurement	35
5.3.5.3	Conducted measurement	35
5.3.5.4	Measurement procedure	35
5.3.5.4.1	Pre-scan	35
5.3.5.4.2	Measurement of the emissions identified during the pre-scan.....	36
5.3.6	Duty cycle.....	37
5.3.6.1	Test conditions	37
5.3.6.2	Radiated measurement	37
5.3.6.3	Conducted measurement	37
5.3.6.4	Measurement procedure	38
5.3.7	Transient power	38
5.3.7.1	Test conditions	38
5.3.7.2	Radiated measurement	38
5.3.7.3	Conducted measurement	38
5.3.7.4	Measurement procedure	39
5.4	Conformance test suites for receivers.....	40
5.4.1	Receiver sensitivity.....	40
5.4.1.1	Test Conditions	40
5.4.1.2	Radiated measurement	40
5.4.1.3	Conducted measurement	40
5.4.1.4	Measurement procedure	40
5.4.2	Adjacent channel selectivity	41
5.4.2.1	Test conditions	41
5.4.2.2	Radiated measurement	41
5.4.2.3	Conducted measurement	41
5.4.2.4	Measurement procedure	41
5.4.3	Receiver spurious response rejection.....	42

5.4.3.1	Test conditions	42
5.4.3.2	Radiated measurement	42
5.4.3.3	Conducted measurement	42
5.4.3.4	Measurement procedure	43
5.4.4	Blocking	43
5.4.4.1	Test conditions	43
5.4.4.2	Radiated measurement	44
5.4.4.3	Conducted measurement	44
5.4.4.4	Measurement procedure	44
5.4.5	Receiver spurious emission	45
5.4.5.1	Test conditions	45
5.4.5.2	Radiated measurement	45
5.4.5.3	Conducted measurement	45
5.4.5.4	Measurement procedure	45
5.4.5.4.1	Conducted measurement	45
5.4.5.4.2	Radiated measurement	46
5.4.6	Receiver maximum input signal level	46
5.4.6.1	Test conditions	46
5.4.6.2	Radiated measurement	46
5.4.6.3	Conducted measurement	47
5.4.6.4	Measurement procedure	47
5.5	Conformance test suites for spectrum access	48
5.5.1	Clear channel assessment threshold	48
5.5.1.1	Test conditions	48
5.5.1.2	Radiated measurement	48
5.5.1.3	Conducted measurement	48
5.5.1.4	Measurement procedure	49
5.5.2	Listen before talk	50
5.5.2.1	Test conditions	50
5.5.2.2	Radiated measurement	50
5.5.2.3	Conducted measurement	50
5.5.2.4	Measurement procedure	50
5.6	Operation under Master Network Access Point (NAP) control	52
5.6.1	Test conditions	52
5.6.2	Radiated measurement	52
5.6.3	Conducted measurement	53
5.6.4	Measurement procedure	53

Annex A (informative):	Relationship between the present document and the essential requirements of Directive 2014/53/EU	55
-------------------------------	---	-----------

Annex B (normative):	Test sites and arrangements for radiated measurement	57
-----------------------------	---	-----------

B.1	General considerations	57
B.2	Radiation test sites	57
B.2.1	Open Area Test Site (OATS)	57
B.2.2	Semi Anechoic Room	58
B.2.3	Fully Anechoic Room (FAR)	59
B.2.4	Measurement Distance	60
B.3	Antenna	61
B.3.1	General considerations	61
B.3.2	Measurement antenna	61
B.3.3	Substitution antenna	61
B.4	Guidance on the use of radiation test sites	62
B.4.1	General considerations	62
B.4.2	Power supplies for the battery powered EUT	62
B.4.3	Site preparation	62
B.5	Coupling of signals	62
B.5.1	General	62
B.5.2	Data signals	63

B.6	Measurement procedures for radiated measurement	63
B.6.1	General considerations	63
B.6.2	Radiated measurements in an OATS or SAR.....	63
B.6.3	Radiated measurements in a FAR	64
B.6.4	Substitution measurement	64
B.6.5	Radiated measurement methods for receivers	64
B.7	Guidance for testing radiated technical requirements	64
B.7.0	General	64
B.7.1	Radio test suites and corresponding test sites.....	65
Annex C (informative):	Selection of receiver parameters.....	66
C.0	Introduction	66
C.1	Receiver sensitivity	66
C.2	Receiver co-channel rejection	66
C.3	Receiver adjacent signal selectivity	66
C.4	Receiver spurious response rejection	66
C.5	Receiver blocking.....	66
C.6	Receiver radio-frequency intermodulation.....	67
C.7	Receiver dynamic range	67
C.8	Desensitization	67
C.9	Receiver unwanted emissions in the spurious domain	67
Annex D (normative):	T_{on} time measurements	68
D.1	Measurement procedure	68
D.2	T _{Disregard} procedure	68
Annex E (normative):	Test fixture	70
E.1	General considerations	70
E.2	Validation of the test-fixture in the temperature chamber.....	71
E.3	Mode of use	72
Annex F (informative):	Properties of EUT	73
Annex G (informative):	Maximum Measurement Uncertainty.....	74
Annex H (informative):	Bibliography	75
Annex I (informative):	Change History	76
History		77

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the **GSM** logo are trademarks registered and owned by the **GSM Association**.

Foreword

(standards.etsi.ai)

This draft Harmonised European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI standards EN Approval Procedure. https://standards.etsi.org/standardization/etsi_en_304_220_2_v1_1_0_2022

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.3] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.1].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A-1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

The present document is part 2 of a multi-part deliverable covering Wideband data transmission SRD operating in the frequency range 25 MHz to 1 000 MHz, as identified below:

Part 1: "Wideband data transmission devices: network access points operating in designated bands";

Part 2: "Wideband data transmission devices: terminal node operating in designated bands".

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN 304 220-2 V1.1.0:2022](#)

<https://standards.iteh.ai/catalog/standards/sist/3aef9aeb-a44f-4b6c-8522-2b0aa6b80b5b/osist-pren-304-220-2-v1-1-0-2022>

1 Scope

The present document specifies technical characteristics and test methods to be used in the conformance assessment of wideband data transmission Short Range Device (SRD) terminal node equipment in the frequency range 25 MHz to 1 GHz. The wideband data transmission device category covers radio devices that use wideband modulation techniques to access the spectrum. The present document specifies technical characteristics and methods of measurements for equipment operated in the following designated frequency bands given in Table 1-1:

Table 1-1: Designated frequency bands

SRD frequency bands	
863 MHz to 868 MHz	According to band no 84 of Commission Implementing Decision (EU) 2022/180 [i.7] and Annex 3 band a1 of CEPT/ERC/REC 70 03 [i.2].
915,8 MHz to 919,4 MHz	According to band a2 of Annex 3 of CEPT/ERC/REC 70 03 [i.2].
917,4 MHz to 919,4 MHz	According to band no 2 of Commission Implementing Decision (EU) 2022/172 [i.8].

In the designated bands the following types of equipment are defined:

Type 1: Wideband Data Transmission Terminal Node (TN) in data networks in 863,0 MHz to 868,0 MHz.

Type 2: Wideband Data Transmission Terminal Node (TN) in data network in 915,8 MHz to 919,4 MHz and in 917,4 MHz to 919,4 MHz:

1) Type 2a: Nomadic Terminal Node (TN) of Type 2 or Mobile Terminal Node (TN) of Type 2.

These radio equipment types are capable of operating in all or part of the relevant frequency bands given in Table 1-1.

NOTE 1: The availability of the frequency bands for type 2 equipment in the European Union and CEPT countries can be obtained from EFIS (<https://efis.cept.org/>) and is also listed in Appendices 1 and 3 of CEPT/ERC/REC 70 03 [i.2].

In addition, it should be noted that, in some countries, part or all of the bands for type 2 equipment may be unavailable, and/or other frequency bands may be available, for networked and/or network based short range devices. See National Radio Interfaces (NRI) as relevant for additional guidance.

NOTE 2: The relationship between the present document and essential requirements of article 3.2 of Directive 2014/53/EU [i.1] is given annex A.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

Not applicable.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.
- [i.2] CEPT/ERC/REC 70-03 (12 February 2022): "Relating to the use of Short Range Devices (SRD)".
- [i.3] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.
- [i.4] ECC Report 261 (01-2017): "Short Range Devices in the frequency range 862-870 MHz".
- [i.5] ECC Report 246 (01-2017): "Wideband and Higher DC Short Range Devices in 870-875.8 MHz and 915.2-920.8 MHz (companion to ECC Report 200)".
- [i.6] Recommendation ITU-T O.153 (10/92): "Basic parameters for the measurement of error performance at bit rates below the primary rate".
- [i.7] Commission Implementing Decision (EU) 2022/180 amending Decision 2006/771/EC on harmonisation of the radio spectrum for use by short-range devices and repealing Decision 2006/804/EC.
- [i.8] [Commission Implementing Decision \(EU\) 2022/172 of 7 February 2022 amending Implementing Decision \(EU\) 2018/1538 on the harmonisation of radio spectrum for use by short-range devices within the 874-876 and 915-921 MHz frequency bands.](http://standards.etsi.org/standards/itu-t-recommendations/itu-t-recommendation-itu-t-o.153.html)
- [i.9] ERC Recommendation 74-01 (May 2019): "Unwanted Emission in the spurious domain".
- [i.10] EN 55016-1-1 (2019): "Specification for radio disturbance and immunity measuring apparatus and methods; Part 1: Radio disturbance and immunity measuring apparatus - Measuring apparatus" (produced by CENELEC).
- [i.11] ETSI TR 100 028 (all parts) (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [i.12] ETSI EN 304 220-1 (V1.1.0): "Wideband data transmission SRD operating in the frequency range 25 MHz to 1 000 MHz; Harmonised Standard for access to radio spectrum; Part 1: Wideband data transmission devices: network access point operating in designated bands".
- [i.13] ETSI TR 102 273-2: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties; Part 2: Anechoic chamber".
- [i.14] ETSI TR 102 273-3: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties; Part 3: Anechoic chamber with a ground plane".
- [i.15] ETSI TR 102 273-4: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties; Part 4: Open area test site".

- [i.16] ETSI EG 203 336 (V1.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Guide for the selection of technical parameters for the production of Harmonised Standards covering article 3.1(b) and article 3.2 of Directive 2014/53/EU".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the following terms apply:

adjacent channel: frequency range equal to the width of the operating channel immediately above and immediately below the operating channel

NOTE: See Figure 3.1-1.

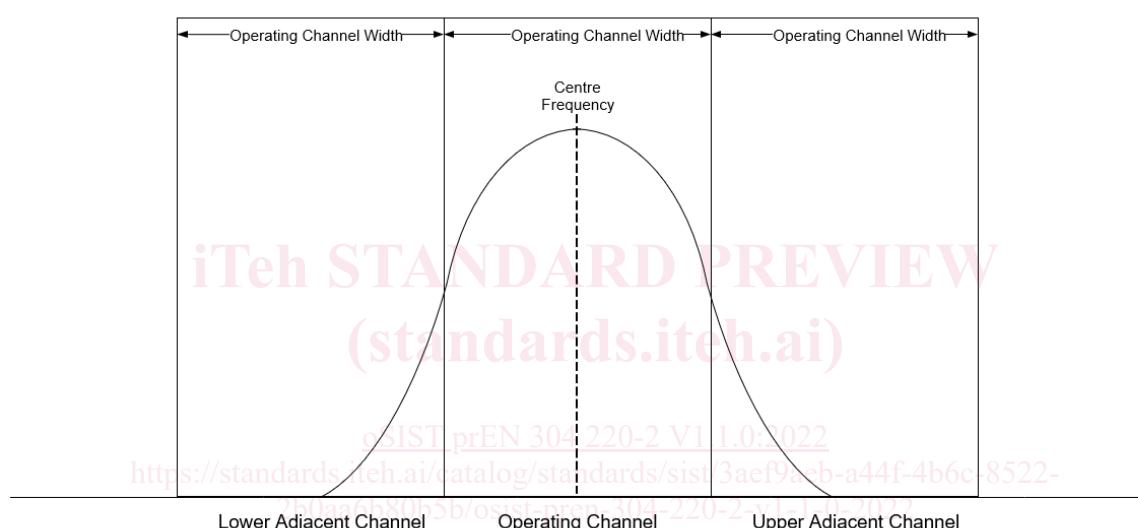


Figure 3.1-1: Adjacent channel definitions

centre frequency: centre frequency of the transmitted signal

Clear Channel Assessment (CCA): procedure of sensing the operating channel to determine whether or not it is occupied by a transmission

conducted measurements: measurements which are made using a direct $50\ \Omega$ connection to the equipment under test

continuous transmission: modulated transmission without interruption for the period of the test

data network: group of wirelessly communicating SRDs composed of a network access point and one or more terminal nodes

dedicated antenna: removable antenna supplied and tested with the radio equipment, designed as an indispensable part of the equipment

dialog: repeated transmit-response cycle between two devices within a transmission

disregard time ($T_{Disregard}$): manufacturer declared interval below which two separate radio emissions in a channel are considered a single continuous transmitted burst

duty cycle: ratio, expressed as a percentage, of the cumulative duration of transmissions in an observation bandwidth within an observation interval divided by the observation interval

fixed SRD: SRD able to operate only at a fixed geographical location

integral antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment

Listen Before Transmit (LBT): mechanism by which an equipment applies Clear Channel Assessment (CCA) before transmission (also known as Listen Before Talk)

master NAP: NAP which enables the operation of nomadic and/or mobile devices

NOTE: Nomadic and mobile terminal nodes (type 2a) are under the control of master NAP in the frequency range of 915,8 MHz to 919,4 MHz and of 917,4 MHz to 919,4 MHz in Europe [i.2] and [i.8].

maximum transmission duration (T_{On-Max}): longest permitted transmission

minimum inter-transmission interval (T_{Off-Min}): minimum interval in a channel between two transmissions by the same device

mobile equipment: equipment in operation while moving

Network Access Point (NAP): fixed terrestrial SRD connecting one or more terminal nodes to an external network or service

NOTE: Harmonised standard ETSI EN 304 220-1 [i.12] addresses NAP equipment.

network control information: data intended to construct or maintain a data network

network data: application data carried over a data network

nomadic equipment: equipment for which the location may change but is stationary while in use

nominal operating frequency: frequency at mid-point of the Operating Channel

observation bandwidth: bandwidth in which the energy of an equipment is considered for the purposes of assessing transmission timings

observation period: reference interval of time

occupied bandwidth: width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to 0,5 % of the total mean power of a given emission

NOTE: See Figure 3.1-2.

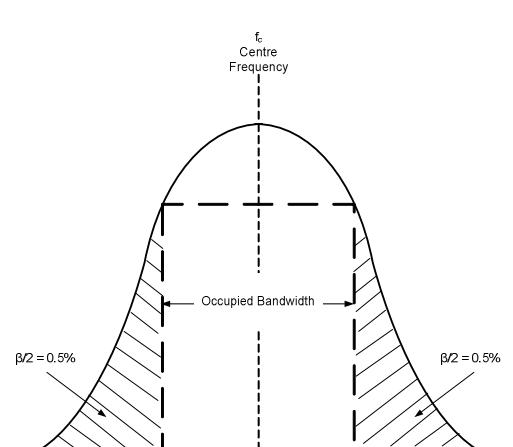


Figure 3.1-2: Signal Occupied Bandwidth

operating channel: frequency range in which transmissions occur

operating channel width: difference between frequency values of the high and low operating channel edges

Permitted Frequency Band (PFB): frequency band or sub-band within which the device is authorized to operate and to perform the intended function of the equipment

radiated measurements: measurements which involve the absolute measurement of a radiated electromagnetic field