

INTERNATIONAL STANDARD

ISO
8765

Third edition
2011-03-15

Hexagon head bolts with metric fine pitch thread — Product grades A and B

*Vis à tête hexagonale à filetage métrique à pas fin partiellement
filetées — Grades A et B*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 8765:2011](#)

[https://standards.iteh.ai/catalog/standards/sist/6b2842c6-1db0-4d63-
851b-b5ff39efaa0/iso-8765-2011](https://standards.iteh.ai/catalog/standards/sist/6b2842c6-1db0-4d63-851b-b5ff39efaa0/iso-8765-2011)



Reference number
ISO 8765:2011(E)

© ISO 2011

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 8765:2011](#)

<https://standards.iteh.ai/catalog/standards/sist/6b2842c6-1db0-4d63-851b-b5ff39efaa0/iso-8765-2011>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 8765 was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 10, *Product standards for fasteners*.

iTeh STANDARD PREVIEW

This third edition cancels and replaces the second edition (ISO 8765:1999), of which it constitutes a minor revision.

(standards.iteh.ai)

ISO 8765:2011

<https://standards.iteh.ai/catalog/standards/sist/6b2842c6-1db0-4d63-851b-b5ff39efaa0/iso-8765-2011>

Introduction

This International Standard belongs to a complete group of product standards developed by ISO on external hexagon drive fasteners. It comprises the following:

- a) hexagon head bolts (ISO 4014, ISO 4015, ISO 4016 and ISO 8765);
- b) hexagon head screws (ISO 4017, ISO 4018 and ISO 8676);
- c) hexagon nuts (ISO 4032, ISO 4033, ISO 4034, ISO 4035, ISO 4036, ISO 7040, ISO 7041, ISO 7042, ISO 7719, ISO 7720, ISO 8673, ISO 8674, ISO 8675, ISO 10511, ISO 10512 and ISO 10513);
- d) hexagon bolts with flange (ISO 4162, ISO 15071 and ISO 15072);
- e) hexagon nuts with flange (ISO 4161, ISO 7043, ISO 7044, ISO 10663, ISO 12125, ISO 12126 and ISO 21670).

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 8765:2011](#)

<https://standards.iteh.ai/catalog/standards/sist/6b2842c6-1db0-4d63-851b-b5ff39efaa0/iso-8765-2011>

Hexagon head bolts with metric fine pitch thread — Product grades A and B

1 Scope

This International Standard specifies the characteristics of hexagon head bolts with metric fine pitch thread with nominal thread diameters, d , from 8 mm to 64 mm, of product grade A for nominal thread diameters, d , from 8 mm to 24 mm and nominal lengths, l , up to and including $10d$ or 150 mm, whichever is the shorter, and of product grade B for nominal thread diameters, d , over 24 mm or nominal lengths, l , over $10d$ or 150 mm, whichever is the shorter.

If, in special cases, specifications other than those listed in this International Standard are required, they can be selected from existing International Standards, for example ISO 724, ISO 888, ISO 898-1, ISO 965-1, ISO 3506-1, ISO 4753 and ISO 4759-1.

It is intended that coarse thread bolts according to ISO 4014 be the first choice.

iTeh STANDARD PREVIEW

2 Normative references (standards.iteh.ai)

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. ~~I~~For ~~undated~~ references, the latest edition of the referenced document (including any amendments) applies. [g/standards/sist/6b2842c6-1db0-4d63-851b-b5ff39efaa0/iso-8765-2011](https://standards.iteh.ai/g/standards/sist/6b2842c6-1db0-4d63-851b-b5ff39efaa0/iso-8765-2011)

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions*

ISO 261, *ISO general-purpose metric screw threads — General plan*

ISO 724, *ISO general-purpose metric screw threads — Basic dimensions*

ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs with specified property classes — Coarse thread and fine pitch thread*

ISO 965-1, *ISO general-purpose metric screw threads — Tolerances — Part 1: Principles and basic data*

ISO 3269, *Fasteners — Acceptance inspection*

ISO 3506-1, *Mechanical properties of corrosion-resistant stainless steel fasteners — Part 1: Bolts, screws and studs*

ISO 4042, *Fasteners — Electroplated coatings*

ISO 4753, *Fasteners — Ends of parts with external ISO metric thread*

ISO 4759-1, *Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C*

ISO 6157-1, *Fasteners — Surface discontinuities — Part 1: Bolts, screws and studs for general requirements*

ISO 8839, *Mechanical properties of fasteners — Bolts, screws, studs and nuts made of non-ferrous metals*

ISO 8992, *Fasteners — General requirements for bolts, screws, studs and nuts*


ISO 10683, *Fasteners — Non-electrolytically applied zinc flake coatings*

3 Dimensions


See Figure 1 and Tables 1 and 2.

Symbols and descriptions of dimensions are specified in ISO 225.

Dimensions in millimetres

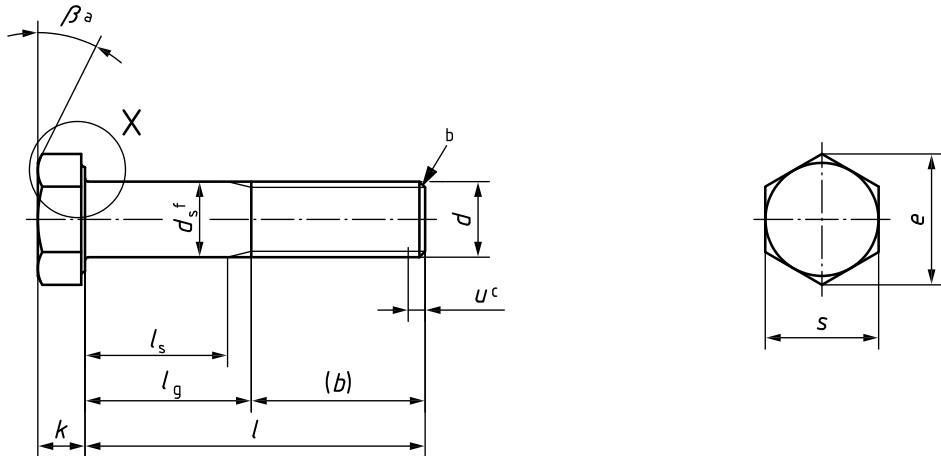

iTeh STANDARD PREVIEW
(standards.iteh.ai)

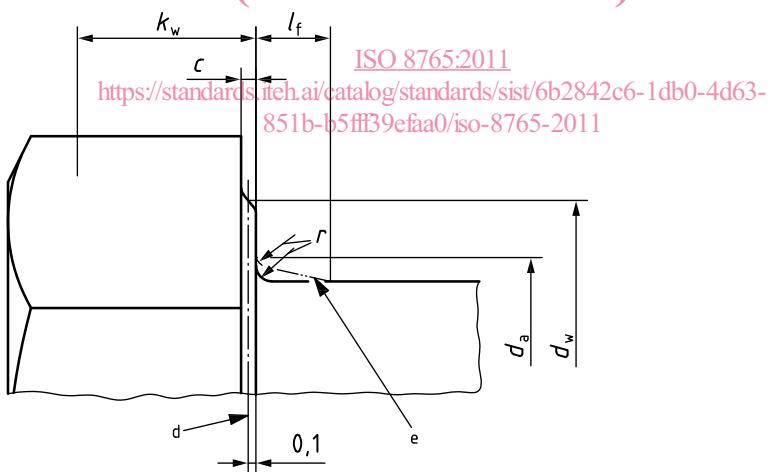

a $\beta = 15^\circ$ to 30° .

b Point shall be chamfered in accordance with ISO 4753.

c Incomplete thread $u \leq 2P$.

d Reference datum for d_w .

e Maximum underhead fillet.

f d_s applies if values of $l_{s,\min}$ are specified.

Figure 1

Table 1 — Preferred threads

Thread ($d \times P$)		Dimensions in millimetres											
		M8 × 1	M10 × 1	M12 × 1,5	M16 × 1,5	M20 × 1,5	M24 × 2	M30 × 2	M36 × 3	M42 × 3	M48 × 3	M56 × 4	M64 × 4
<i>b</i> ref.	a	22	26	30	38	46	54	66	—	—	—	—	—
	b	28	32	36	44	52	60	72	84	96	108	—	—
	c	41	45	49	57	65	73	85	97	109	121	137	153
<i>c</i>	max.	0,60	0,60	0,8	0,8	0,8	0,8	0,8	1,0	1,0	1,0	1,0	1,0
	min.	0,15	0,15	0,2	0,2	0,2	0,2	0,2	0,3	0,3	0,3	0,3	0,3
	nom. = max.	8,00	10,00	12,00	16,00	20,00	24,00	30,00	36,00	42,00	48,00	56,00	64,00
Product grade $\frac{A}{B}$	min.	7,78	9,78	11,73	15,73	19,67	23,67	—	—	—	—	—	—
	nom.	7,64	9,64	11,57	15,57	19,48	23,48	29,48	35,38	41,38	47,38	55,26	63,26
<i>d_w</i> Product grade $\frac{A}{B}$	min.	11,63	14,63	16,63	22,49	28,19	33,61	—	—	—	—	—	—
	nom.	11,47	14,47	16,47	22	27,7	33,25	42,75	51,11	59,95	69,45	78,66	88,16
<i>e</i> Product grade $\frac{A}{B}$	min.	14,38	17,77	20,03	26,75	33,53	39,98	—	—	—	—	—	—
	nom.	14,20	17,59	19,85	26,17	32,95	39,55	50,85	60,79	71,3	82,6	93,56	104,86
<i>I_f</i>	max.	2	2	3	3	4	4	6	6	8	10	12	13
	nom.	5,3	6,4	7,5	10	12,5	15	18,7	22,5	26	30	35	40
<i>k</i> Product grade A	max.	5,45	6,58	7,68	10,18	12,715	15,215	—	—	—	—	—	—
	min.	5,15	6,22	7,32	9,82	12,285	14,785	—	—	—	—	—	—
Product grade B	max.	5,54	6,69	7,79	10,29	12,85	15,35	19,12	22,92	26,42	30,42	35,5	40,5
	min.	5,06	6,11	7,21	9,71	12,15	14,65	18,28	22,08	25,58	29,58	34,5	39,5
<i>k_w</i> ^d Product grade $\frac{A}{B}$	min.	3,61	4,35	5,12	6,87	8,6	10,35	—	—	—	—	—	—
	nom. = max.	13,00	16,00	18,00	24,00	30,00	36,00	46	55,0	65,0	75,0	85,0	95,0
<i>s</i> Product grade $\frac{A}{B}$	min.	12,73	15,73	17,73	23,67	29,67	35,38	—	—	—	—	—	—
	nom.	12,57	15,57	17,57	23,16	29,16	35	45	53,8	63,1	73,1	82,8	92,8

Table 1 (continued)

Dimensions in millimetres

Thread $(d \times P)$	Product grade		M8 × 1	M10 × 1	M12 × 1,5	M16 × 1,5	M20 × 1,5	M24 × 2	M30 × 2	M36 × 3	M42 × 3	M48 × 3	M56 × 4	M64 × 4
	A	B	l_s	l_g	l_s	l_g	l_s	l_g	l_s	l_g	l_s	l_g	l_s	l_g
35	34,5	35,5	—	—	—	—	—	—	—	—	—	—	—	—
40	39,5	40,5	—	—	11,75	18	—	—	—	—	—	—	—	—
45	44,5	45,5	—	—	16,75	23	11,5	19	—	—	—	—	—	—
50	49,5	50,5	—	—	21,75	28	16,5	24	11,25	20	—	—	—	—
55	54,4	55,6	—	—	26,75	33	21,5	29	16,25	25	—	—	—	—
60	59,4	60,6	—	—	31,75	38	26,5	34	21,25	30	—	—	—	—
65	64,4	65,6	—	—	36,75	43	31,5	39	26,25	35	17	27	—	—
70	69,4	70,6	—	—	41,75	48	36,5	44	31,25	40	22	32	—	—
80	79,4	80,6	—	—	51,75	58	46,5	54	41,25	50	32	42	21,5	34
90	89,3	90,7	88,25	91,75	—	—	56,5	64	51,25	60	42	52	31,5	44
100	99,3	100,7	98,25	101,75	—	—	66,5	74	61,25	70	52	62	41,5	54
110	109,3	110,7	108,25	111,75	—	—	—	—	71,25	80	62	72	51,5	64
120	119,3	120,7	118,25	121,75	—	—	81,25	90	72	82	61,5	74	51	66
130	129,2	130,8	128	132	—	—	—	—	76	86	65,5	78	55	70
140	139,2	140,8	138	142	—	—	—	—	86	96	75,5	88	65	80
150	149,2	150,8	148	152	—	—	—	—	96	106	85,5	98	75	90
160	—	—	158	162	—	—	—	—	106	116	95,5	108	85	100
180	—	—	178	182	—	—	—	—	115,5	128	105	120	90,5	108
200	—	—	197,7	202,3	—	—	—	—	135,5	148	125	140	110,5	128
220	—	—	217,7	222,3	—	—	—	—	132	147	117,5	135	103	123
240	—	—	237,7	242,3	—	—	—	—	152	167	137,5	155	123	143
260	—	—	257,4	262,6	—	—	—	—	157,5	175	143	163	128,5	151
280	—	—	277,4	282,6	—	—	—	—	177,5	195	183	148,5	171	134
300	—	—	297,4	302,6	—	—	—	—	197,5	215	183	203	168,5	191

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/iso/iso-8765-2011-10282cfaa0/iso-8765-39edf315b-b5ff3161851b>

Table 1 (*continued*)