



# DRAFT INTERNATIONAL STANDARD ISO/DIS 6358-3.2

ISO/TC 131/SC 5

Secretariat: AFNOR

Voting begins on  
2012-08-21

Voting terminates on  
2012-10-21

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

## Pneumatic fluid power — Determination of flow-rate characteristics of components —

### Part 3:

## Method for calculating steady-state flow-rate characteristics of assemblies

*Transmissions pneumatiques — Détermination des caractéristiques de débit des composants —  
Partie 3: Méthode de calcul des caractéristiques de débit constant des assemblages*

[Revision of first edition (ISO 6358-3:1989) and ISO/DIS 6358-5]

ICS 23.100.01

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.

Pour accélérer la distribution, le présent document est distribué tel qu'il est parvenu du secrétariat du comité. Le travail de rédaction et de composition de texte sera effectué au Secrétariat central de l'ISO au stade de publication.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/1a92ab25-7872-4be8-b2a4-16b0eeced640/iso-6358-3-2014>

### Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

## ontents

Page

Foreword .....	v
Introduction.....	vi
<b>1</b> <b>Scope</b> .....	<b>1</b>
<b>2</b> <b>Normative references</b> .....	<b>1</b>
<b>3</b> <b>Terms and definitions</b> .....	<b>1</b>
<b>4</b> <b>Symbols and units</b> .....	<b>1</b>
<b>5</b> <b>Calculation hypotheses</b> .....	<b>2</b>
<b>5.1</b> <b>General</b> .....	<b>2</b>
<b>5.2</b> <b>Relationships among component flow-rate characteristics</b> .....	<b>3</b>
<b>5.3</b> <b>Flow-rate characteristics</b> .....	<b>3</b>
<b>5.3.1</b> <b>General</b> .....	<b>3</b>
<b>5.3.2</b> <b>Flow-rate characteristics of piping defined by its geometric dimensions</b> .....	<b>4</b>
<b>5.3.3</b> <b>Components whose flow-rate characteristics are expressed by historically used flow parameters or equivalent length of straight pipe</b> .....	<b>6</b>
<b>6</b> <b>Organisation of calculations for assemblies of components connected in series</b> .....	<b>6</b>
<b>6.1</b> <b>General</b> .....	<b>6</b>
<b>6.2</b> <b>Imposed parameters</b> .....	<b>7</b>
<b>6.3</b> <b>Calculation principle</b> .....	<b>7</b>
<b>6.3.1</b> <b>General</b> .....	<b>7</b>
<b>6.3.2</b> <b>Calculation of the downstream pressure <math>p_{2i}</math></b> .....	<b>7</b>
<b>6.3.3</b> <b>Determination of the outlet pressure of the last component in the assembly</b> .....	<b>8</b>
<b>6.4</b> <b>Determination of the sonic conductance <math>C</math> and the pressure dependence coefficient <math>K_p</math> (step 1)</b> .....	<b>8</b>
<b>6.4.1</b> <b>Determination of theoretical maximum mass flow rate <math>(q_m)_{MAX}</math></b> .....	<b>8</b>
<b>6.4.2</b> <b>Determination of the choked mass flow rate <math>q_m^*</math></b> .....	<b>9</b>
<b>6.4.3</b> <b>Calculation of the sonic conductance <math>C</math></b> .....	<b>9</b>
<b>6.4.4</b> <b>Calculation of pressure dependence coefficient <math>K_p</math></b> .....	<b>9</b>
<b>6.5</b> <b>Determination of the cracking pressure <math>\Delta p_c</math> (step 2)</b> .....	<b>10</b>
<b>6.6</b> <b>Determination of the critical back-pressure ratio <math>b</math> and subsonic index <math>m</math> (step 3)</b> .....	<b>10</b>
<b>6.6.1</b> <b>Calculation of subsonic flow data</b> .....	<b>10</b>
<b>6.6.2</b> <b>Determination of flow-rate characteristics <math>b</math> and <math>m</math></b> .....	<b>11</b>
<b>7</b> <b>Organisation of calculations for assemblies of components connected in parallel</b> .....	<b>11</b>
<b>7.1</b> <b>General</b> .....	<b>11</b>
<b>7.2</b> <b>Imposed parameters</b> .....	<b>12</b>
<b>7.3</b> <b>Calculation principle</b> .....	<b>12</b>
<b>7.4</b> <b>if some components are pipes, tubes or hoses, determination of their flow characteristics for the given inlet pressure (step 0)</b> .....	<b>13</b>
<b>7.5</b> <b>Determination of the sonic conductance <math>C</math> (step 1)</b> .....	<b>13</b>
<b>7.6</b> <b>Determination of the cracking pressure <math>\Delta p_c</math> (step 2)</b> .....	<b>13</b>
<b>7.7</b> <b>Determination of the critical back-pressure ratio <math>b</math> and subsonic index <math>m</math> (step 3)</b> .....	<b>13</b>
<b>7.7.1</b> <b>Calculation of subsonic flow data</b> .....	<b>13</b>
<b>7.7.2</b> <b>Determination of flow-rate characteristics <math>b</math> and <math>m</math></b> .....	<b>14</b>
<b>Annex A</b> (informative) <b>Examples of calculations for components connected in series using the solver function built into Microsoft® Excel</b> .....	<b>15</b>
<b>A.1</b> <b>Assembly of components</b> .....	<b>15</b>
<b>A.2</b> <b>Illustration of the determination of the sonic conductance <math>C</math> (step 1)</b> .....	<b>16</b>
<b>A.3</b> <b>Illustration of the determination of <math>\Delta p_c</math>, <math>b</math> and <math>m</math> (steps 2 and 3)</b> .....	<b>16</b>
<b>A.4</b> <b>Calculation using a different inlet pressure</b> .....	<b>17</b>

<b>Annex B (informative) Example calculation for an air blow circuit whose components are connected in parallel .....</b>	<b>19</b>
<b>B.1 Air blow circuit .....</b>	<b>19</b>
<b>B.2 Calculation results .....</b>	<b>20</b>
<b>B.3 Supplemental explanation .....</b>	<b>22</b>
<b>B.3.1 General .....</b>	<b>22</b>
<b>B.3.2 Pressure distributions and evaluation values .....</b>	<b>22</b>
<b>B.3.3 Incorrect sizing .....</b>	<b>24</b>
<b>B.3.4 Correct sizing .....</b>	<b>24</b>
<b>B.3.5 Improved sizing .....</b>	<b>24</b>
<b>B.3.6 Optimal sizing .....</b>	<b>25</b>
<b>B.3.7 Pressure dependency .....</b>	<b>25</b>
<b>Annex C (informative) Flow charts of calculation procedures .....</b>	<b>26</b>
<b>C.1 Calculation procedures for components connected in series .....</b>	<b>26</b>
<b>C.2 Calculation procedures for components connected in parallel .....</b>	<b>32</b>
<b>Annex D (informative) Additional information concerning components whose flow rate characteristics are not expressed in accordance with the ISO 6358 series .....</b>	<b>35</b>
<b>D.1 General .....</b>	<b>35</b>
<b>D.2 Pipes or tubes defined by their geometric dimensions (see 5.3.2) .....</b>	<b>36</b>
<b>D.2.1 General .....</b>	<b>36</b>
<b>D.2.2 Allowable dimensional differences of resin tubes .....</b>	<b>36</b>
<b>D.2.3 Pipe or tube whose flow-rate characteristics are expressed using the friction factor dependent on the Reynolds number .....</b>	<b>37</b>
<b>D.2.4 Pipe or tube whose flow-rate characteristics are expressed using experimental equations for air .....</b>	<b>41</b>
<b>D.3 Valves and connectors whose flow-rate characteristics are expressed as an equivalent length of straight pipe or tube .....</b>	<b>42</b>
<b>D.4 Components whose flow-rate characteristics are expressed by historically used flow coefficients .....</b>	<b>44</b>
<b>D.4.1 Components whose flow-rate characteristic is expressed using the nominal flow-rate <math>q_N</math> .....</b>	<b>44</b>
<b>D.4.2 Components whose flow-rate characteristic is expressed using using <math>C_v</math> .....</b>	<b>45</b>
<b>D.4.3 Components whose flow-rate characteristic is expressed using using <math>K_v</math> .....</b>	<b>46</b>
<b>Annex E (informative) Visualisation of calculation results .....</b>	<b>47</b>
<b>E.1 General .....</b>	<b>47</b>
<b>E.2 Assembly of several components with flow-rate characteristic curves of the same shape, connected in series .....</b>	<b>48</b>
<b>E.3 Assembly of two components with flow-rate characteristic curves of different shapes, connected in series .....</b>	<b>48</b>
<b>E.3.1 When the sonic conductance <math>C</math> of each component in the series is the same .....</b>	<b>48</b>
<b>E.3.2 When the sonic conductance <math>C</math> of each component in the series is different .....</b>	<b>49</b>
<b>E.4 Assembly of two components connected in parallel .....</b>	<b>51</b>
<b>Bibliography .....</b>	<b>53</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 6358-3 was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 5, *Control products and components*.

This first edition of ISO 6358-3, together with ISO 6358-1 and ISO 6358-2, cancels and replaces ISO 6358:1989, which has been technically revised. However, Parts 2 and 3 are new standards whose scopes were not included in ISO 6358:1989.

ISO 6358 consists of the following parts, under the general title *Pneumatic fluid power — Determination of flow-rate characteristics of components*:

- *Part 1: General rules and test methods for steady-state flow*
- *Part 2: Alternative test methods*
- *Part 3: Method for calculating steady-state flow-rate characteristics of assemblies*

## Introduction

In pneumatic fluid power systems, power is transmitted and controlled through a gas under pressure within a circuit. Components that make up such a circuit are inherently resistive to the flow of the gas, and it is necessary, therefore, to define and determine the characteristics that describe their performance.

ISO 6358:1989 specified a method to determine the flow-rate characteristics of pneumatic valves, based upon a model of converging nozzles. The method included two characteristic parameters: sonic conductance,  $C$ , and critical pressure ratio,  $b$ , used in a proposed mathematical approximation of the flow behaviour. The result described flow performance of a pneumatic valve from choked (sonic) flow to subsonic flow.

Experience has demonstrated that many pneumatic valves have converging-diverging characteristics that do not fit the ISO 6358:1989 model very well. A change was necessary to take into account the influence of the flow velocity on pressure measurements. Furthermore, new developments have allowed the application of this method to additional components beyond pneumatic valves. However, this now requires the use of four parameters ( $C$ ,  $b$ ,  $m$ , and  $\Delta p_c$ ) to define the flow performance in both the choked (sonic) and subsonic regions.

This part of ISO 6358 uses a set of four flow-rate characteristic parameters determined from test results. These parameters are described as follows and are listed in decreasing order of priority:

- The sonic conductance,  $C$  corresponding to the maximum flow rate (choked), is the most important parameter. This parameter is defined by the upstream stagnation conditions.
- The critical back-pressure ratio,  $b$ , representing the boundary between choked and subsonic flow, is second in importance. Its definition differs here from the one in ISO 6358:1989 because it corresponds to the ratio of downstream to upstream stagnation pressures.
- The subsonic index,  $m$ , is used if necessary to represent more accurately the subsonic flow behaviour. For components with a fixed flow path (i.e., one that does not vary with pressure or flow rate),  $m$  is distributed around 0,5. In these cases, only the first two characteristic parameters  $C$  and  $b$  are necessary. For many other components,  $m$  varies widely; in these cases, it is necessary to determine  $C$ ,  $b$  and  $m$ .
- The parameter  $\Delta p_c$  is the cracking pressure. This parameter is used only for pneumatic components that open with increasing upstream pressure, such as non-return (check) valves or one-way flow control valves.

Several changes to the test equipment were made to overcome apparent violations of the theory of compressible fluid flow. This included expanded inlet pressure-measuring tubes to satisfy the assumptions of negligible inlet velocity to the item under test and to allow the inlet stagnation pressure to be measured directly. Expanded outlet tubes allowed the direct measurement of downstream stagnation pressure to better accommodate different component models. The difference between stagnation pressure upstream and downstream of a component means a loss of pressure energy.

For testing a component with a large nominal bore, to shorten testing time or to reduce energy consumption, it is desirable to apply the methods specified in ISO 6358-2, which covers a discharge test and a charge test as alternative test methods.

This part of ISO 6358 can be used to calculate without measurements an estimate of the overall flow rate characteristics of an assembly of components and piping. In most cases, the flow rate characteristics of components are determined in accordance with parts 1 or 2 of ISO 6358; however, the flow rate characteristics of some components are expressed by flow rate coefficients other than those defined in ISO 6358. Formulas to calculate nearly equivalent flow rate characteristics are given.

# Pneumatic fluid power — Determination of flow-rate characteristics of components — Part 3: Method for calculating steady-state flow-rate characteristics of assemblies

## 1 Scope

This part of ISO 6358 specifies a method that uses a simple numerical technique to estimate without measurements the overall flow-rate characteristics of an assembly of components and piping with known flow-rate characteristics.

Up to four independent coefficients,  $C$  (sonic conductance),  $b$  (critical back-pressure ratio),  $m$  (subsonic index) and  $\Delta p_c$  (cracking pressure), may be used to describe the relationship between the flow rate and pressure drop of a component in a pneumatic system. These flow-rate characteristics are determined for each component in accordance with the measurement methods described in parts 1 and 2 of ISO 6358. The equations used in these parts of ISO 6358 describe the behaviour of a compressible fluid flow through a component for both subsonic and choked flows. (to be validated see JP-01 in doc. 131/5/3 N670)

**NOTE** The conductance of a tube, silencer or filter is influenced by the upstream pressure, so the values of  $C$  and  $b$  are only valid for the upstream pressure at which they are determined.

This part of ISO 6358 also provides methods to obtain equivalent flow-rate characteristics for components whose flow-rate characteristics differ from those defined in ISO 6358.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 6358-1:201X, *Pneumatic fluid power — Determination of flow-rate characteristics of components using compressible fluids — Part 1: General rules and test methods for steady-state flow* (to be published)

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 and ISO 6358-1 apply.

## 4 Symbols and units

**4.1** The symbols and units used in this part of ISO 6358 shall be in accordance with ISO 6358-1 and Table 1.

**Table 1 — Symbols and units**

Symbol	Description	SI unit
$d$	Inside diameter of pipe, tube or hose	m
$L$	Length of pipe, tube or hose	m
$\lambda$	Average friction factor of a pipe, tube or hose depending on the Reynolds number	–
$p_{s2}$	Static pressure downstream of the pipe, tube or hose	Pa
$\gamma$	Ratio of specific heat capacities (for air, it equals 1,4)	–
$k$	Friction coefficient of the pipe, tube or hose resulting from experimental tests	–
$Re$	Reynolds number of the flow within the pipe, tube or hose	–
$\mu$	Dynamic viscosity	Pa.s
$p_{11}, p_{12}, p_{1i}, p_{1n}$	Upstream pressure at inlet of each component (stagnation pressure)	Pa
$p_{21}, p_{22}, p_{2i}, p_{2n}$	Downstream pressure at outlet of each component (stagnation pressure)	Pa
NOTE See Annex D for additional symbols used in that annex.		

4.2 The subscripts used in this part of ISO 6358 shall be in accordance with ISO 6358-1 and Table 2.

**Table 2 — Subscripts used in this part of ISO 6358**

Subscript	Description
$i$	Number of the component (valve, silencer, etc.) or the piping (pipe, tube, hose, connector, etc.), with $i = 1$ at the start of the system and $n$ at the end
pipe	Relating to the static downstream pressure of the piping when expressed using a friction factor depending on the Reynolds number
e	Relating to the inlet
f	Relating to the final component
$j$	Index of step calculation of the assembly

## 5 Calculation hypotheses

### 5.1 General

The following hypotheses are considered for the flow-rate characteristics of the equivalent system:

- Flow is assumed to be adiabatic, to take into consideration that stagnation temperatures at the inlet of each component are identical to each other.
- For components connected in series, the outlet pressure of one component is the same as the inlet pressure of the following component.
- For components connected in parallel, the inlet pressure and outlet pressure for each component are the same.



## 5.2 Relationships among component flow-rate characteristics

5.2.1 When  $b < \frac{p_2}{p_1} < 1 - \frac{\Delta p_c}{p_1}$

the flow is subsonic, the relationship of a component's mass flow rate to its flow-rate characteristics is shown in Equation (1):

$$q_m = C\rho_0 p_1 \sqrt{\frac{T_0}{T_1}} \left[ 1 - \left( \frac{\frac{p_2}{p_1} - b}{1 - \frac{\Delta p_c}{p_1} - b} \right)^2 \right]^m \quad (1)$$

5.2.2 When  $\frac{p_2}{p_1} \leq b$

the flow is choked, the relationship of a component's mass flow rate to its flow-rate characteristics is shown in Equation (2):

$$q_m^* = C\rho_0 p_1^* \sqrt{\frac{T_0}{T_1^*}} \quad (2)$$

5.2.3 When  $1 - \frac{\Delta p_c}{p_1} \leq \frac{p_2}{p_1} \leq 1$

the mass flow rate is zero, the relationship of a component's mass flow rate to its flow-rate characteristics is shown in Equation (3):

$$q_m = 0 \quad (3)$$

NOTE The symbols used in Equations (1), (2) and (3) are from ISO 6358-1 and are not used in the remainder of this part of ISO 6358. The equations are described here for general reference and have specific application later in this part of ISO 6358.

## 5.3 Flow-rate characteristics

### 5.3.1 General

Before applying the calculation procedure described either in clause 6 for components connected in series or in clause 7 for components connected in parallel, the flow-rate characteristics of all components should be expressed in accordance with ISO 6358.

If the flow-rate characteristics of some components are expressed by methods other than ISO 6358, the values of  $C$ ,  $b$ ,  $m$  and  $\Delta p_c$  can be obtained in accordance with 5.3.2 or 5.3.3 and Annex D.

**5.3.2 Flow-rate characteristics of piping defined by its geometric dimensions**

**5.3.2.1 General**

Pipes, tubes and hoses are defined by their length  $L$  and inside diameter  $d$ . When these are included in an assembled system, either formulas based on traditional fluid mechanics, in accordance with 5.3.2.2, or the formulas based on test results, in accordance with 5.3.2.3, shall be used. The formulas based on test results are based on testing conducted in accordance with ISO 6358-1 at 500 kPa (5 bar). A maximum error of  $\pm 15\%$  can be expected due to the variation in the tolerances of inside diameters. Details of the test results are described in Annex D. Additional information on the development of the theoretical formulas is given in D.2.3.

**5.3.2.2 Formulas using the friction factor dependent on the Reynolds number**

**5.3.2.2.1** Using the traditional friction factor  $\lambda$ , which is dependent on the Reynolds number, equations (4) to (7) can be used to calculate the flow-rate characteristic parameters of a pipe, tube or hose. These equations can be applied with any gas that can be considered as a perfect gas. Further information about the theoretical aspects related to these equations is given in Annex D.

$$C_{\text{pipe}} = \frac{\pi}{4\rho_0\sqrt{RT_0}} \frac{d^2}{\sqrt{\left(1 + \frac{\lambda L}{d}\right) + \sqrt{\frac{2}{\gamma(\gamma+1)} \sqrt{1 + \frac{\lambda L}{d} + \frac{1}{\gamma(\gamma+1)}}}} \tag{4}$$

$$b_{\text{pipe}} = 1 - \frac{1}{1 + \frac{1}{\sqrt{\frac{\gamma(\gamma+1)}{2}} \sqrt{1 + \frac{\lambda L}{d}}} + \frac{1}{\gamma(\gamma+1) \left(1 + \frac{\lambda L}{d}\right)}} \tag{5}$$

$$m_{\text{pipe}} = 0,5 \tag{6}$$

$$\Delta p_{c\text{pipe}} = 0 \tag{7}$$

NOTE The parameters calculated in Equations (4) to (7) have the subscript "pipe" to indicate that they relate to the downstream static pressure in the pipe, tube or hose.

**5.3.2.2.2** In Equations (4) to (7), the average Darcy friction factor  $\lambda$  is dependent on the Reynolds number as shown in Equation (8); the Reynolds number is determined using Equations (9) and (10):

$$\lambda = \frac{1}{(1,8\log_{10}(Re) - 1,64)^2} \tag{8}$$

NOTE Equation (8) is the Filonenko formula, which is used with smooth circular pipes and a turbulent flow (given for Reynolds numbers higher than 4000, see reference [2] in the bibliography). Other formulas that can be found in the literature can also be used for the expression of the friction factor as a function of the Reynolds number. See D.2.3.2 for further information.

**5.3.2.2.3** The Reynolds number,  $Re$  is the dimensionless parameter correlating the viscous behaviour of Newtonian fluids, as shown in Equation (9):

$$Re = \frac{4q_m}{\pi d \mu} \tag{9}$$

**5.3.2.2.4** The parameter  $\mu$  is the dynamic viscosity. The fluid temperature dependency can be taken into account, for example, in accordance with the Sutherland law expressed by Equation (10), which is valid for air:

$$\mu = \mu_r \left( \frac{T_e}{T_r} \right)^{3/2} \left( \frac{T_r + S}{T + S} \right)$$

where:

$\mu_r = 1,712 \times 10^{-5}$  Pa.s is the dynamic viscosity for the Sutherland reference temperature  $T_r$

$T_r = 273$ K is the Sutherland reference temperature

$S = 110,4$ K is the Sutherland constant

which gives

$$\mu = 1,455 \times 10^{-6} \frac{T_e^{3/2}}{T_e + 110,4} \quad (10)$$

**5.3.2.2.5** In the case of air ( $\gamma = 1,4$ ), Equations (4) and (5) become Equations (11) and (12):

$$C_{\text{pipe}} = \frac{2,28 \times 10^{-3} d^2}{\sqrt{\left(1 + \frac{\lambda L}{d}\right) + 0,77} \sqrt{1 + \frac{\lambda L}{d} + 0,3}} \quad (11)$$

$$b_{\text{pipe}} = 1 - \frac{1}{1 + \frac{0,77}{\sqrt{1 + \frac{\lambda L}{d}}} + \frac{0,3}{1 + \frac{\lambda L}{d}}} \quad (12)$$

### 5.3.2.3 Formulas for air, based on test results

NOTE Equations (13) to (18) give the flow-rate characteristics of the pipe or tube for an inlet pressure of 500 kPa (5 bar).

**5.3.2.3.1** Equations (13) to (16) are based on the results of testing conducted in accordance with ISO 6358-1 with air and can be used to calculate the flow-rate characteristic parameters of a pipe or tube. Measurement results for polyurethane tubes are given in H.4 of ISO 6358-1:201X. Further information is given in D.2.4.

$$C = \frac{\pi d^2}{2 \times 10^3 \sqrt{k \frac{L}{d} + 1}} \quad (13)$$

$$b = 4,8 \times 10^2 \frac{C}{d^2} \quad (14)$$

$$m = 0,58 - 0,1b \quad (15)$$

$$\Delta p_c = 0 \quad (16)$$

**5.3.2.3.2** The parameter  $k$  is a diameter-dependent friction coefficient determined from test results. It is dependent only on the inside diameter of the pipe or tube and not on the flow conditions.

a) For resin tubes, determine  $k$  by using Equation (17):

$$k = 2,35 \times 10^{-3} d^{-0,31} \tag{17}$$

b) For steel tubes, determine  $k$  by using Equation (18):

$$k = 3,61 \times 10^{-3} d^{-0,31} \tag{18}$$

**5.3.2.3.3** For other inlet pressures, calculate the corresponding flow-rate characteristics using the pressure dependence coefficient  $K_p$  for sonic conductance equal to  $2 \times 10^{-7}$  [-/Pa], in accordance with ISO 6358-1.


**5.3.3 Components whose flow-rate characteristics are expressed by historically used flow parameters or equivalent length of straight pipe**

When the flow-rate characteristics of a component are expressed by historically used flow parameters, for example, nominal flow rate  $q_N$ ,  $C_v$  or  $K_v$ , or in terms of an equivalent length of straight pipe or tube, a rough evaluation of compressible flow-rate characteristics can be obtained using the guidance provided in Annex D.

**6 Organisation of calculations for assemblies of components connected in series**

**6.1 General**

Consider an assembly of components connected in series as illustrated in Figure 1: the same mass flow rate  $q_m$  of fluid passes through all components.

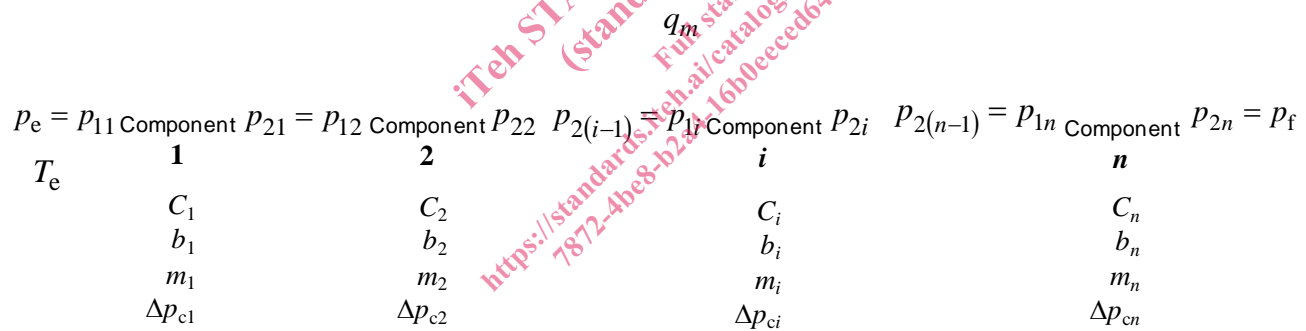

**Figure 1 — Assembly of components connected in series**

The aim of the method specified in this clause is to obtain a single set of flow-rate characteristics for the assembly, determined from the flow-rate characteristics of the components and piping as illustrated in Figure 2.




Figure 2 — Equivalent assembly

## 6.2 Imposed parameters

For the calculation of the flow-rate characteristics of an assembly of components connected in series, the following parameters are imposed:

- the inlet pressure ( $p_e$ ) to the assembly, which is the upstream pressure to the first component ( $p_{11}$ ),
- the temperature  $T_e$  of the fluid.

## 6.3 Calculation principle

### 6.3.1 General

Consider the assembly of components connected in series as shown in Figure 1. The flow-rate characteristics of this assembly are determined in three main steps:

- a) step 1 – determination of the sonic conductance  $C$ ;
- b) step 2 – determination of the cracking pressure  $\Delta p_{ci}$  and
- c) step 3 – determination of the critical back-pressure ratio  $b$  and subsonic index  $m$ .

Steps 1 and 3 require the same calculation principle described below and consist of the determination of the outlet pressure of the components connected in series  $p_i$  for given subsonic flow rates  $q_m$ .

For a given mass flow rate  $q_m$ , flowing through each component at subsonic flow and a fixed inlet pressure  $p_e$ , the calculation consists of determining the outlet pressure of each component,  $p_{2i}$ , starting with the first component and proceeding through to the last component.

### 6.3.2 Calculation of the downstream pressure $p_{2i}$

#### 6.3.2.1 General case

**6.3.2.1.1** The downstream pressure  $p_{2i}$  of component  $i$  can be calculated only in a subsonic condition, which means that to calculate the downstream pressure  $p_{2i}$  of component  $i$ , the mass flow rate shall be less than the choked flow rate, as determined by Equation (19):

$$q_m < C_i \rho_0 p_{1i} \sqrt{\frac{T_0}{T_e}} \quad (19)$$

**6.3.2.1.2** Rearranging the subsonic relationship with the knowledge of the flow-rate characteristics of component  $i$ , its downstream pressure  $p_{2i}$  can be expressed as a function of the mass flow rate  $q_m$  and of its upstream pressure  $p_{1i}$  as shown in Equation (20), but only if the mass flow rate is less than the choked flow rate, as verified by Equation (19):

$$p_{2i} = p_{1i} \left[ b_i + \left( 1 - \frac{\Delta p_{ci}}{p_{1i}} - b_i \right) \sqrt{1 - \left( \frac{q_m}{C_i \rho_0 p_{1i} \sqrt{\frac{T_e}{T_0}}} \right)^{m_i}} \right] \quad (20)$$