

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 3548-3:2015

<https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015>

INTERNATIONAL
STANDARD

ISO
3548-3

First edition
2012-12-01

**Plain bearings — Thin-walled half
bearings with or without flange —**

**Part 3:
Measurement of peripheral length**

Paliers lisses — Demi-coussinets minces à collerette ou sans collerette —

Partie 3: Mesurage de la longueur développée

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST ISO 3548-3:2015](https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015)

<https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015>



Reference number
ISO 3548-3:2012(E)

© ISO 2012

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 3548-3:2015

<https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols	2
5 Purpose of checking	3
6 Checking methods	4
6.1 Method A.....	4
6.2 Method B.....	4
7 Choice and designation of checking method	5
7.1 Choice of checking method.....	5
7.2 Designation of checking method.....	6
8 Measuring equipment	6
9 Measuring equipment requirements	8
9.1 General.....	8
9.2 Tolerance on checking load setting.....	8
9.3 Speed of approach of measuring head.....	9
9.4 Construction of measuring head.....	9
9.5 Accuracy of the measuring plane for metering bars.....	9
9.6 Accuracy of the dial gauge.....	9
10 Gauging tools for establishing the datum	9
10.1 General.....	9
10.2 Master checking block (used alone).....	10
10.3 Series checking block used alone.....	10
10.4 Series checking block with master shell.....	10
11 Checking block requirements	10
11.1 General.....	10
11.2 Reference tooling: master checking block — General.....	11
11.3 Series gauging tools.....	13
12 Master shell and comparison shell requirements	15
12.1 Master shell requirements.....	15
12.2 Comparison shell requirements.....	17
13 Correction factors	18
13.1 Reference tooling: master checking block correction factor, $F_{cor,cbm}$	18
13.2 Series control tooling.....	18
13.3 Marking.....	19
13.4 Reference setting.....	19
14 Typical checking procedure	19
15 Conditions of the half bearings to be checked	20
16 Measuring errors	20
16.1 Errors due to measuring equipment.....	20
16.2 Errors due to the checking block.....	20
16.3 Errors due to the correction factor.....	21
16.4 Errors due to the half bearing.....	21
16.5 Error due to the choice of checking method.....	21
17 Accuracy of methods used	21
17.1 Checking conditions.....	21

ISO 3548-3:2012(E)

17.2	Limits.....	21
17.3	Calculation.....	21
18	Specifications on bearing drawings.....	21
19	Specifications for the control of the checking means.....	21
Annex A	(normative) Determination of the correction factor of the master checking block — Method A.....	23
Annex B	(normative) Determination of the correction factor of the master checking block — Method B.....	27
Annex C	(normative) Determination of the correction factor of the series checking block used alone.....	31
Annex D	(normative) Determination of the correction factor of the master shell or comparison shell.....	33
Annex E	(normative) Tests and calculation of repeatability, reproducibility and comparability.....	35

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 3548-3:2015](https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015)

<https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3548-3 was prepared by Technical Committee ISO/TC 123, *Plain Bearings*, Subcommittee SC 5, *Quality analysis and assurance*.

This first edition of ISO 3548-3 cancels and replaces ISO 6524:1992, which has been technically revised.

ISO 3548 consists of the following parts, under the general title *Plain bearings — Thin walled half bearings with or without flange*:

- Part 1: *Tolerances, design features and methods of test*
- Part 2: *Measurement of wall thickness and flange thickness*
- Part 3: *Measurement of peripheral length*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 3548-3:2015

<https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015>

Plain bearings — Thin-walled half bearings with or without flange —

Part 3: Measurement of peripheral length

1 Scope

This part of ISO 3548 specifies, according to ISO 12301, the checking of the peripheral length of thin-walled half bearings with or without flange, and describes the necessary checking methods and measuring equipment.

Thin-walled half bearings are flexible and, in the free condition, do not conform to a cylindrical profile. This is one reason the peripheral length of the half bearings can only be measured under a constraining load by use of specialized measuring equipment.

In addition, measuring equipment different from that illustrated in this part of ISO 3548 can be used, provided the measuring accuracy of the equipment is consistent with the specifications given in Clause 17.

This part of ISO 3548 does not include measurement of the parting line taper.

This part of ISO 3548 applies to thin-walled half bearings, the specifications of which are given in ISO 3548-1.

2 Normative references

SIST ISO 3548-3:2015

<https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce->

[c3e8e028107f/sist-iso-3548-3-2015](https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015)

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3548-1, *Plain bearings — Thin-walled half bearings with or without flange — Tolerances, design features and methods of test*

ISO 12301, *Plain bearings — Quality control techniques and inspection of geometrical and material quality characteristics*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1 peripheral length

circumferential length, which runs from one parting line face to the other

3.2 crush height

a

value by which a half bearing, fitted in a checking block of bore diameter, d_{cb} , under a predetermined checking load, F , exceeds the defined peripheral length of the checking block bore. See Figure 1.

NOTE In practice, the datum serves as a basis for measuring a (see Figure 1).

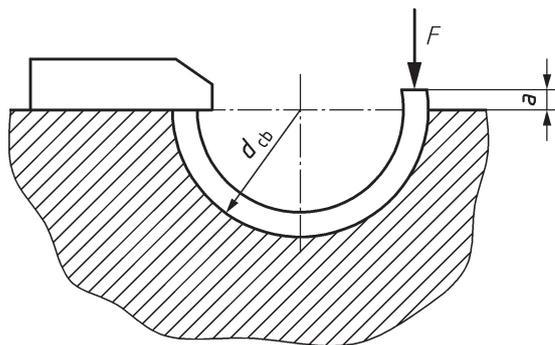


Figure 1 — Crush height, a

3.3 repeatability

closeness of agreement between successive results obtained with the same method on the same test piece, under the same conditions (same operator, same measuring equipment, same checking place and time intervals)

NOTE Repeatability is assessed from the standard deviation of repeatability σ_{Δ} (see Annex E).

3.4 reproducibility

closeness of agreement between individual results obtained with the same method on the same test piece but under different conditions (identical or different operator, measurement equipment, checking place and times)

NOTE For the purposes of this part of ISO 3548, reproducibility is the difference between the two averages obtained from two sets of measuring equipment (see Annex E).

3.5 comparability

accuracy in the case of operators working in different checking places at different periods and each of them achieving individual results, one using method A and the other using method B, on the same plain bearing test piece in different checking blocks

NOTE Comparability is assessed from the difference between the two averages obtained from the two methods (see Annex E).

4 Symbols

For the purposes of this document, the following symbols apply.

Table 1 — Symbols and units

Symbol	Parameter	Unit
a_A or $a_{B1}+a_{B2}$	Crush height	mm
B	Width of the half bearing without flange	mm
B_1	Checking block width (construction for flanged half bearings)	mm
B_2	Checking block width	mm
B_3	Checking block width (construction for half bearings without flange)	mm
B_{ms}	Master shell width	mm
d_{cb}	Diameter of the checking block bore	mm
D_{bs}	Outside diameter of the half bearing to be checked	mm

Table 1 (continued)

Symbol	Parameter	Unit
D_{ms}	Outside diameter of the master shell	mm
E	Elasticity modulus	MPa
F	Friction coefficient in calculation of deflection under load	
$F = F_1 = F_2$	Checking load	N
F_{cor}	Correction factor	mm
H	Fillet radius between back and flange on flanged half bearing	mm
H_{cb}	Distance from the bottom of the checking block bore to the datum face	mm
ΔH_{cb}	Elastic deformation of the height of the checking block under load	mm
K_1	Checking block chamfer (construction for half bearings without flange)	mm
K_2	Checking block chamfer (construction for flanged half bearings)	mm
L	Peripheral length	mm
Δl	Deviation of the actual peripheral length of the checking block	mm
p_E	Elastic depression of the metering bar	mm
R_a	Surface roughness	μm
s_{cs}	Wall thickness of the comparison shell	mm
s_{ms}	Wall thickness of the master shell	mm
s_{tot}	Total wall thickness of the half bearing	mm
U	Uncertainty of measurement	
W	Width of the metering bar contact area	mm
Z	Distance between flanges of the flanged half bearing	mm
δ	Empirical correction to compensate for the difference in elastic deflections under load between method A and method B	mm
δ_x	Correction, estimated by calculation	mm
σ	Standard deviation	mm

The characteristic subscripts are given in Table 2.

Table 2 — Subscripts

Subscript	
bs	bearing to be checked
cb	checking block
cbm	master checking block
cbs	series checking block
cs	comparison shell
M	measured
ms	master shell
th	theoretical


5 Purpose of checking

In order to ensure the required mounting compression (interference fit) for the half bearings in the housing bore, it is necessary to keep to the crush height tolerances as specified in ISO 3548-1 and ISO 12301.

6 Checking methods

6.1 Method A

The checking load, F , is directly applied via the measuring head with a pivoting metering bar to one parting line face of the half bearing while the other parting line face is in contact with a fixed stop (see Figure 2).

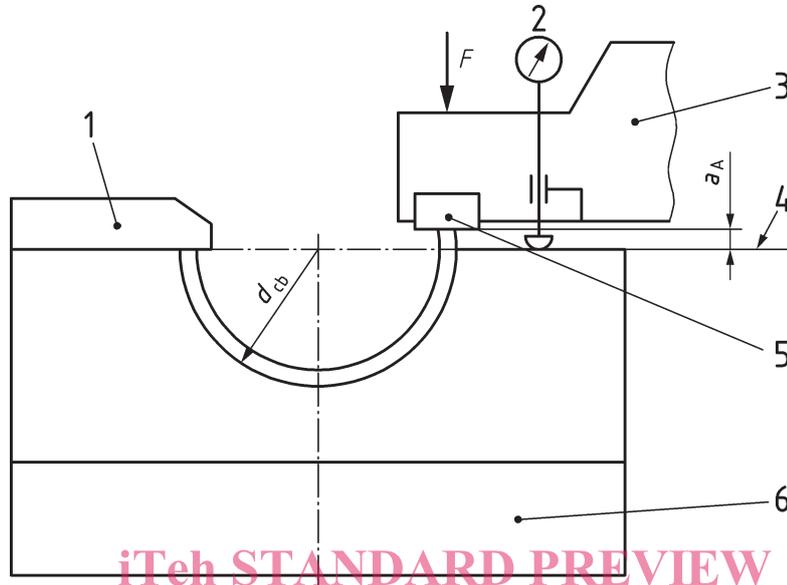

$$a_A = (n/p)_A$$

(1)

Key

- 1 fixed stop
- 2 dial gauge
- 3 movable measuring head
- 4 datum
- 5 metering bar
- 6 checking block


SIST ISO 3548-3:2015

<https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015>

Figure 2 — Measuring principle of method A

6.2 Method B

The checking loads, F_1 and F_2 , are applied via the measuring head and two metering bars to both parting line faces of the half bearing (see Figure 3).

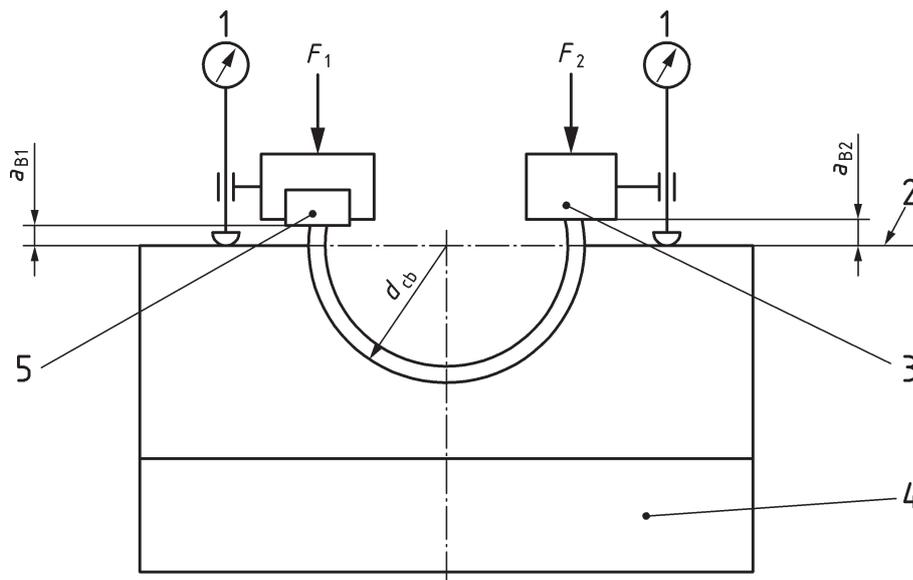

$$a_B = a_{B1} + a_{B2} = a$$

(2)

Key

1 dial gauge

2 datum

3 rigid metering bar^a

4 checking block

5 pivoting toe piece

a Bearings may also be checked using two pivoting metering bars.

<https://standards.iteh.ai/catalog/standards/sist/4e872a58-a425-45a2-adce-c3e8e028107f/sist-iso-3548-3-2015>

Figure 3 — Measuring principle of method B

NOTE In the case of method A, the fixed stop exerts the required counterforce, which, in the case of method B, is applied directly by the measuring equipment via two metering bars.

EXAMPLEMethod A $F = 6\,000\text{ N}$ Method B $F_1 = 6\,000\text{ N}$ $F_2 = 6\,000\text{ N}$ **7 Choice and designation of checking method****7.1 Choice of checking method**

Recommendations for choosing either method A or method B, based on dimensions of the half bearings to be checked, are given in Table 3.