

---

**Pomorske širokopasovne radijske povezave, ki delujejo v pasovih od 5852 MHz do 5872 MHz in/ali od 5880 MHz do 5900 MHz, za ladje in priobalne objekte pri usklajevanju dejavnosti - Harmonizirani standard za dostop do radijskega spektra**

Maritime Broadband Radiolink operating within the bands 5 852 MHz to 5 872 MHz and/or 5 880 MHz to 5 900 MHz for ships and off-shore installations engaged in coordinated activities - Harmonised Standard for access to radio spectrum

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 303 276 V1.2.1:2021](https://standards.iteh.ai/catalog/standards/sist/430524e-fbfa-4bf4-b001-6e326d806a38/sist-en-303-276-v1-2-1-2021)

[https://standards.iteh.ai/catalog/standards/sist/430524e-fbfa-4bf4-b001-](https://standards.iteh.ai/catalog/standards/sist/430524e-fbfa-4bf4-b001-6e326d806a38/sist-en-303-276-v1-2-1-2021)

[6e326d806a38/sist-en-303-276-v1-2-1-2021](https://standards.iteh.ai/catalog/standards/sist/430524e-fbfa-4bf4-b001-6e326d806a38/sist-en-303-276-v1-2-1-2021)

**Ta slovenski standard je istoveten z: ETSI EN 303 276 V1.2.1 (2021-01)**

---

**ICS:**

33.060.99	Druga oprema za radijske komunikacije	Other equipment for radiocommunications
47.020.70	Navigacijska in krmilna oprema	Navigation and control equipment

**SIST EN 303 276 V1.2.1:2021**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 303 276 V1.2.1:2021](#)

<https://standards.iteh.ai/catalog/standards/sist/4305f24e-fbfa-4bf4-b001-6e326d806a38/sist-en-303-276-v1-2-1-2021>

# ETSI EN 303 276 V1.2.1 (2021-01)



**Maritime Broadband Radiolink operating within the bands  
5 852 MHz to 5 872 MHz and/or 5 880 MHz to 5 900 MHz for  
ships and off-shore installations  
engaged in coordinated activities;  
Harmonised Standard for access to radio spectrum**

SIST EN 303 276 V1.2.1:2021  
6e326d806a38/sist-en-303-276-v1-2-1-2021

---

**Reference**REN/ERM-TGMAR-604

---

**Keywords**broadband, data, harmonised standard, maritime,  
radio**ETSI**650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

---

**Important notice**

<https://standards.iteh.ai/catalog/standards/sist/430524e-fbfa-4bf4-b001-6c340506138/sist-en-303-276-v1-2-1-2021>  
The present document can be downloaded from:  
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:  
<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

---

**Copyright Notification**

---

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2021.

All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

**GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

# Contents

Intellectual Property Rights .....	5
Foreword.....	5
Modal verbs terminology.....	5
1 Scope .....	6
2 References .....	6
2.1 Normative references .....	6
2.2 Informative references.....	6
3 Definition of terms, symbols and abbreviations.....	7
3.1 Terms.....	7
3.2 Symbols.....	7
3.3 Abbreviations .....	7
4 Technical requirements specifications .....	8
4.1 Environmental profile.....	8
4.2 General and operational requirements .....	8
4.2.0 General.....	8
4.2.1 Construction.....	8
4.2.2 Controls and indicators .....	8
4.2.3 Labeling .....	8
4.3 Transmitter Requirements .....	9
4.3.1 Operating Frequency error.....	9
4.3.1.1 Definition .....	9
4.3.1.2 Method of measurement.....	9
4.3.1.3 Limits .....	9
4.3.2 Transmitter EIRP .....	9
4.3.2.1 Definition .....	9
4.3.2.2 Method of measurement.....	9
4.3.2.3 Limits .....	10
4.3.3 Adaptive Transmitter Power Control.....	10
4.3.3.1 Definition .....	10
4.3.3.2 Method of measurement.....	10
4.3.3.3 Limits .....	11
4.3.4 Transmitter spectrum mask.....	11
4.3.4.1 Definition .....	11
4.3.4.2 Method of measurement.....	11
4.3.4.3 Limits .....	11
4.3.5 Transmitter spurious emissions.....	12
4.3.5.1 Definition .....	12
4.3.5.2 Method of measurement.....	12
4.3.5.3 Limits .....	13
4.4 Receiver Requirements.....	13
4.4.1 Maximum usable sensitivity .....	13
4.4.1.1 Definition .....	13
4.4.1.2 Method of measurement.....	13
4.4.1.3 Limits .....	14
4.4.2 Error behaviour at high input levels (dynamic range).....	14
4.4.2.1 Definition .....	14
4.4.2.2 Method of measurement.....	14
4.4.2.3 Limits .....	14
4.4.3 Co-channel rejection .....	14
4.4.3.1 Definition .....	14
4.4.3.2 Method of measurement.....	14
4.4.3.3 Limits .....	15
4.4.4 Adjacent channel selectivity .....	15
4.4.4.1 Definition .....	15

4.4.4.2	Method of measurement.....	15
4.4.4.3	Limits.....	16
4.4.5	Blocking.....	16
4.4.5.1	Definition.....	16
4.4.5.2	Method of measurement.....	16
4.4.5.3	Limits.....	17
4.4.6	Receiver and Transmitter standby spurious emissions.....	17
4.4.6.1	Definition.....	17
4.4.6.2	Method of measurement.....	17
4.4.6.3	Limits.....	18
4.4.7	Receiver spurious response rejection.....	18
4.4.7.1	Definition.....	18
4.4.7.2	Method of measurement.....	18
4.4.7.3	Limit.....	20
4.4.8	Receiver radio-frequency intermodulation.....	20
4.4.8.1	Definition.....	20
4.4.8.2	Method of Measurement.....	20
4.4.8.3	Limit.....	21
5	Testing for compliance with technical requirements.....	21
5.1	General conditions of measurements.....	21
5.1.1	General.....	21
5.1.2	Test site and general arrangements for measurements.....	21
5.1.3	Test signals.....	21
5.1.4	Bit error measurements.....	21
5.1.5	Impedance.....	22
5.1.6	Tests of equipment with a notch filter.....	22
5.1.7	Facilities for access.....	22
5.1.7.1	Coupling arrangements.....	22
5.1.8	Modes of operation of the transmitter.....	22
5.2	Environmental conditions for testing.....	22
5.2.1	General Requirements.....	22
5.2.2	Test conditions.....	22
5.2.2.1	General.....	22
5.2.2.2	Test signals.....	22
5.2.2.3	Normal test conditions.....	23
5.2.2.3.1	Normal temperature and humidity.....	23
5.2.2.3.2	Normal power source.....	23
5.2.2.3.2.1	Mains voltage and frequency.....	23
5.2.2.3.2.2	Battery power source.....	23
5.2.2.3.2.3	Other power sources.....	23
<b>Annex A (informative):</b>	<b>Relationship between the present document and the essential requirements of Directive 2014/53/EU.....</b>	<b>24</b>
<b>Annex B (informative):</b>	<b>Maximum measurement uncertainty.....</b>	<b>26</b>
<b>Annex C (informative):</b>	<b>Checklist.....</b>	<b>27</b>
<b>Annex D (informative):</b>	<b>Bibliography.....</b>	<b>29</b>
<b>Annex E (informative):</b>	<b>Change history.....</b>	<b>30</b>
History.....		31

---

## Intellectual Property Rights

### Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

### Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

---

## Foreword

This Harmonised European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.2] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.1]. <https://standards.iteh.ai/catalog/standards/sist/430524e-fbfa-4bf4-b001-6e326d806a38/sist-en-303-276-v1-2-1-2021>

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

National transposition dates	
Date of adoption of this EN:	6 January 2021
Date of latest announcement of this EN (doa):	30 April 2021
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 October 2021
Date of withdrawal of any conflicting National Standard (dow):	31 October 2022

---

## Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# 1 Scope

The present document specifies technical characteristics and methods of measurements for below-deck equipment for maritime mobile broadband radiocommunication systems (MBR) radio equipment utilizing integral electronically phase steered antennae applicable for communications between vessels and between vessels and platforms engaged in coordinated off-shore activities and intended to operate at the frequencies shown in table 1, operating with linear polarization or Left Hand Circular Polarization (LHCP)

**Table 1: MBR operating frequencies**

Operation	MBR operating frequencies
Transmission	5 862 MHz, 5 890 MHz
Reception	5 862 MHz, 5 890 MHz

NOTE: The relationship between the present document and essential requirements of article 3.2 of Directive 2014/53/EU is given in annex A.

# 2 References

## 2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] Recommendation ITU-T O.150 (05-1996) plus corrigendum 1 (05/2002): "General requirements for instrumentation for performance measurements on digital transmission equipment".
- [2] ETSI TS 103 052 (V1.1.1) (03-2011): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Radiated measurement methods and general arrangements for test sites up to 100 GHz".

## 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.



- [i.2] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.
- [i.3] ECC Recommendation (17)03 (2017): "Guidance for the harmonised use and coordination of Maritime Broadband Radio (MBR) systems on board ships and off-shore platforms operating within the frequency bands 5852-5872 MHz and 5880-5900 MHz".
- [i.4] ETSI EG 203 336 (V1.2.1) (05-2020): "Guide for the selection of technical parameters for the production of Harmonised Standards covering article 3.1(b) and article 3.2 of Directive 2014/53/EU".
- [i.5] ERC Recommendation 74-01 (2019): "Unwanted emissions in the spurious domain".
- [i.6] ITU Radio Regulations (2020).

## 3 Definition of terms, symbols and abbreviations

### 3.1 Terms

For the purposes of the present document, the following terms apply:

**out-of-band domain:** frequency range, immediately outside the necessary bandwidth but excluding the spurious domain

**switching range:** maximum frequency band within which an equipment can operate

iTech STANDARD PREVIEW  
(standards.iteh.ai)

### 3.2 Symbols

SIST EN 303 276 V1.2.1:2021

<https://standards.iteh.ai/catalog/standards/sist/430524e-fbfa-4bf4-b001-6c520d606a58/sist-en-303-276-v1-2-1-2021>

For the purposes of the present document, the following symbols apply:

$C_F$	Minimum number of frames
$dB_c$	Level (dB) below carrier
$dBm$	Level (dB) relative to 1 mW
$dBW$	Level (dB) relative to 1 W
$f$	frequency
$N$	Number of transmitted bits
$ppm$	parts per million ( $10^{-6}$ )
$s$	second
$V$	Volt

### 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ac	alternating current
ATPC	Adaptive Transmitter Power Control
BER	Bit Error Rate
CRC	Cyclic Redundancy Check
EIRP	Equivalent Isotropically Radiated Power
EUT	Equipment Under Test
FER	Frame Error Rate
LHCP	Left Hand Circular Polarization
MBR	Maritime Broadband Radiolink
NA	Not Applicable
OOB	Out Of Band
PTT	Push To Talk

RBW	Reference BandWidth
RF	Radio Frequency
sr	switching range
TDMA	Time Division Multiple Access
VSWR	Voltage Standing Wave Ratio

---

## 4 Technical requirements specifications

### 4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be in accordance with its intended use, but as a minimum, shall be that specified in the test conditions contained in the present document. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the operational environmental profile defined by its intended use.

### 4.2 General and operational requirements

#### 4.2.0 General

Compliance with clauses 4.2.1, clause 4.2.2 and clause 4.2.3 shall be established by simple inspection of the equipment and its technical documentation.

#### 4.2.1 Construction (standards.iteh.ai)

All controls shall be of sufficient size to enable the usual control functions to be easily performed and the number of controls should be the minimum necessary for simple and satisfactory operation. The equipment shall be capable of operating on single frequency channels.

#### 4.2.2 Controls and indicators

The equipment shall have a channel selector and shall indicate the channel at which the installation is set. The operating channel shall be legible irrespective of the external lighting conditions.

The equipment shall have the following additional controls and indicators:

- an on/off switch for the entire installation with a visual indication that the installation is in operation;
- a visual indication that the equipment is transmitting.

The equipment shall also meet the following requirements:

- The user shall not have access to any control which, if wrongly set, might impair the technical characteristics of the equipment.

#### 4.2.3 Labeling

All controls, instruments, indicators and ports shall be clearly labelled. Details of the power supply from which the equipment is intended to operate shall be clearly indicated on the equipment.

## 4.3 Transmitter Requirements

### 4.3.1 Operating Frequency error

#### 4.3.1.1 Definition

The frequency error is the difference between the measured carrier frequency and its nominal value.

#### 4.3.1.2 Method of measurement

The measurement setup shall be as in Figure 1.

The MBR transmitter shall be configured to transmit on the highest frequency available in the equipment, at a normal RF output power level using test signal 1.

The receiving test antenna shall be connected to a frequency counter.

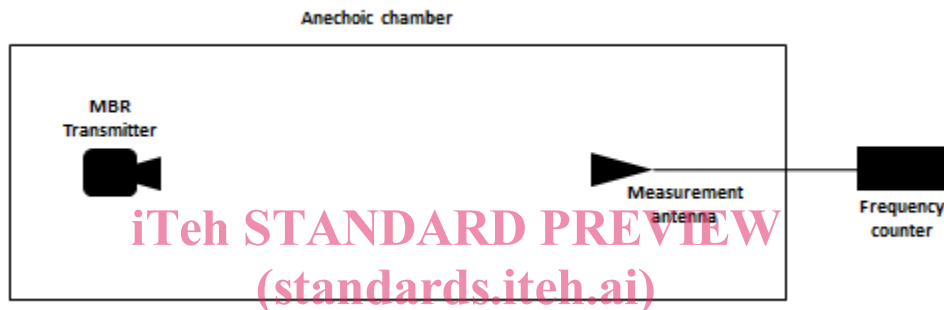


Figure 1: Measurement set up for operating frequency error

The transmitter frequency shall be measured and noted.

#### 4.3.1.3 Limits

The measured frequency error shall not exceed 2 ppm.

### 4.3.2 Transmitter EIRP

#### 4.3.2.1 Definition


The transmitter EIRP is the maximum radiated power of the equipment with its associated antenna.

#### 4.3.2.2 Method of measurement

The measurement setup shall be as in Figure 2.

The MBR transmitter shall be configured to operate at maximum RF output power level using test signal 1.

The receiving test antenna shall be connected to a spectrum analyser.

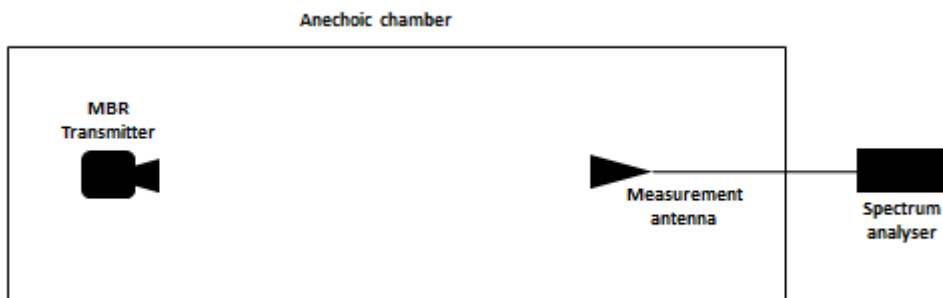

**Figure 2: Measurement setup for transmitter EIRP**

Max Hold (peak detector) shall be selected and the centre frequency adjusted to that of the EUT.

The peak value of the power envelope shall be measured and noted.

For measuring the transmitter EIRP, the substitution method described in clause 4 of ETSI TS 103 052 [2] shall be used.

#### 4.3.2.3 Limits

The EIRP shall not exceed 25 dBW (55 dBm) with left hand circular polarized radiation and 22 dBW (52 dBm) with linear polarized radiation.

NOTE: These values are specified in Annex 1 of ECC Recommendation (17)03 [i.3].

#### 4.3.3 Adaptive Transmitter Power Control

##### 4.3.3.1 Definition

Adaptive power control is an automatic mechanism to regulate the transmitter output power.


##### 4.3.3.2 Method of measurement

The measurement setup shall be as in Figure 3.

For the measurement, two MBR equipments (MBR A and MBR B) shall be used to establish a normal MBR communication link using test signal 2.

The equipment under test (MBR A) shall be operated at a power level that produces a signal level of at least 50 dB above the sensitivity level (see clause 4.4.1) at MBR B with the Adaptive Transmitter Power Control (ATPC) inactive.

The receiving test antenna shall be connected to a spectrum analyser.

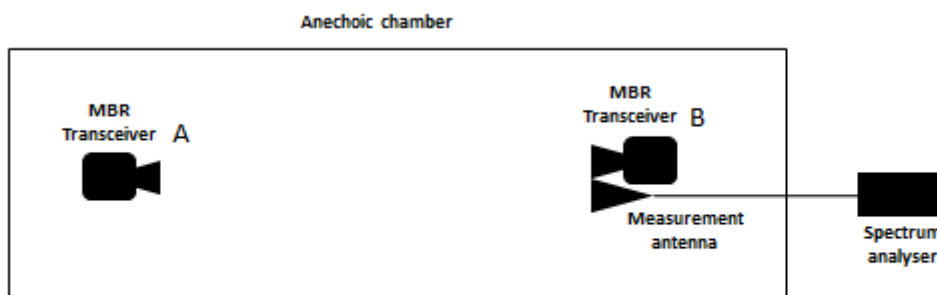

**Figure 3: Measurement setup for adaptive transmitter power control**