
Road vehicles — Sheath-type glow-plugs with conical seating and their cylinder head housing —

**Part 3:
M10 glow-plugs**

iTeh STANDARD PREVIEW
Véhicules routiers — Bougies de préchauffage à fourreau et à siège conique et leur logement dans la culasse —
Partie 3: Bougies M10
(standards.iteh.ai)

[ISO 6550-3:2013](https://standards.iteh.ai/catalog/standards/sist/a7cad711-b92a-4131-b7f8-64da6d676194/iso-6550-3-2013)

<https://standards.iteh.ai/catalog/standards/sist/a7cad711-b92a-4131-b7f8-64da6d676194/iso-6550-3-2013>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 6550-3:2013

<https://standards.iteh.ai/catalog/standards/sist/a7cad711-b92a-4131-b7f8-64da6d676194/iso-6550-3-2013>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Dimensions and tolerances	1
3.1 Glow-plugs	1
3.2 Cylinder head housing	3
3.3 Threads	4
4 Installation tightening torque	5
Annex A (normative) Pin terminal dimensions	7
Annex B (normative) Alternative pin terminals	8

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 6550-3:2013](https://standards.iteh.ai/catalog/standards/sist/a7cad711-b92a-4131-b7f8-64da6d676194/iso-6550-3-2013)

<https://standards.iteh.ai/catalog/standards/sist/a7cad711-b92a-4131-b7f8-64da6d676194/iso-6550-3-2013>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 1, *Ignition equipment*.

This fourth edition cancels and replaces the third edition (ISO 6550-3:2009), which has been technically revised.

ISO 6550 consists of the following parts, under the general title *Road vehicles — Sheath-type glow-plugs with conical seating and their cylinder head housing*:

- Part 1: *M14 × 1,25 glow-plugs*
- Part 2: *M12 × 1,25 glow-plugs*
- Part 3: *M10 glow-plugs*
- Part 4: *M8 × 1 glow-plugs*

Road vehicles — Sheath-type glow-plugs with conical seating and their cylinder head housing —

Part 3: M10 glow-plugs

1 Scope

This part of ISO 6550 specifies the main characteristics of M10 sheath-type glow-plugs with conical seating and their cylinder head housing, for use with diesel (compression-ignition) engines.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 68-1, *ISO general purpose screw threads — Basic profile — Part 1: Metric screw threads*

ISO 261, *ISO general purpose metric screw threads — General plan*

ISO 965-1, *ISO general purpose metric screw threads — Tolerances — Part 1: Principles and basic data*

ISO 965-3, *ISO general purpose metric screw threads — Tolerances — Part 3: Deviations for constructional screw threads*

ISO 1101, *Geometrical product specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out*

ISO 8092-1, *Road vehicles — Connections for on-board electrical wiring harnesses — Part 1: Tabs for single-pole connections — Dimensions and specific requirements*


ISO 8092-4, *Road vehicles — Connections for on-board electrical wiring harnesses — Part 4: Pins for single- and multi-pole connections — Dimensions and specific requirements*

3 Dimensions and tolerances

3.1 Glow-plugs

Sheath-type glow-plug dimensions and tolerances shall be as given in [Figure 1](#) and [Table 1](#).

Dimensions in millimetres

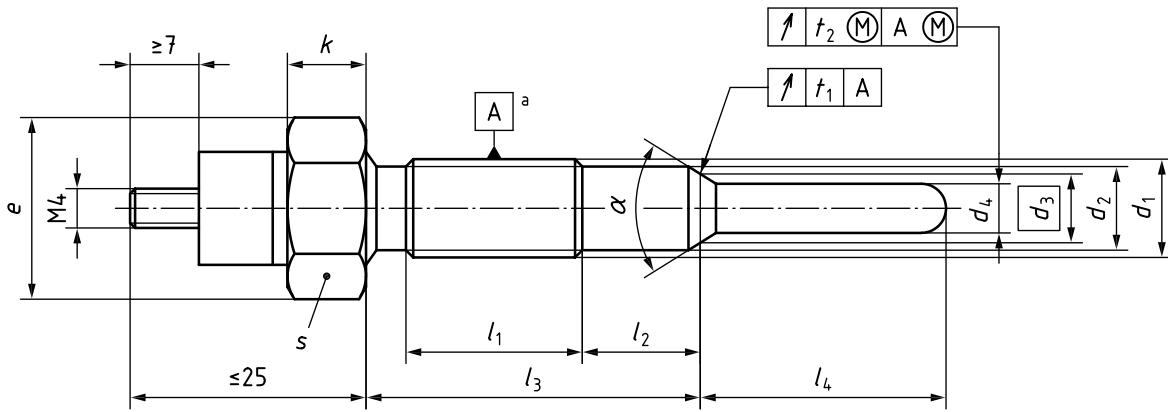

a) With threaded terminal^b (types A1 to A6 and C1 to C3)



b) With blade terminal^b (types B1 and B2)

c) With pin terminal^b (types B3 and B4)


ISO 6550-3:2013

<https://standards.itech.ai/catalog/standards/sist/a7cad711-b92a-4131-b7f8-64da6d676194/iso-6550-3-2013>



d) With pin terminal^b (type C4)

e) With reduced tip end diameter at sheathed glow element^b



f) with cone end diameter^b

Key

- 1 tab ISO 8092-1, size 6,3 x 0,8
- 2 pin in accordance with [Annex A](#)
- 3 pin ISO 8092-4, size 4
- a Major diameter, in accordance with ISO 1101.
- b For other dimensions see [Figure 1 a](#)).

NOTE See Table 1 for dimensions.

Figure 1 — M10 sheath-type glow-plugs

Table 1 — Glow-plugs dimensions

Dimensions in millimetres


Type	Terminal	Thread		Hexagon			Body						Glow tube				
		d_1	l_1	s	E	K	α	d_2	d_3 ref.	t_1	l_2	l_3	d_4 $\pm 0,2$	d_5 0 $-0,2$	l_4	l_5	t_2
A1	M4	M10× 1,25- 6g	≥ 22,0	12,0 h 13	≥ 13,3	≥ 4,0	123°±2°	8,2 _{-0,2} ⁰	7,0	0,2	10 ⁺¹ ₀	35,0 ± 1	5,0	-	20,0 ± 1	-	0,7
A2															25,0 ± 1		
A3															30,0 ± 1		
A4															20,0 ± 1		
A5															25,0 ± 1		
A6															30,0 ± 1		
B1	blade	M10× 1-6g	≥ 10,0	9,6 h 14	≥ 10,7	≥ 7,0	93°±2°	8,3±0,13	6,4	0,18	7,0 ± 0,25	20,0 ± 0,25	5,0	-	28,5 ± 0,5	-	0,7
B2	9,1 ± 0,25										25,9 ± 0,25	27,0 ± 0,5					
B3	7,0 ± 0,25										26,7 ± 0,25	28,5 ± 0,5					
B4												pin ^a			28,5 ± 0,5		
C1	M4	M10× 1-6g	≥ 10,0	10,0 h 13	≥ 11,0	≥ 7,0	63°±2°	8,5 _{-0,2} ⁰	7,0	0,2	≥ 11,5	≥ 33,0	5,0	-	25,0 ± 0,5	-	0,7
C2														4,0	0,4		
C3														-	30,0 ± 0,5	0,7	
C4														pin ISO 8092-4, size 4	4,0	25,0 ± 0,5	≥ 5,0

^a See [Annex A](#).

3.2 Cylinder head housing

The dimensions and tolerances of the cylinder head housing for sheath-type glow-plugs shall be as given in [Figure 2](#) and [Table 2](#).

Dimensions in millimetres

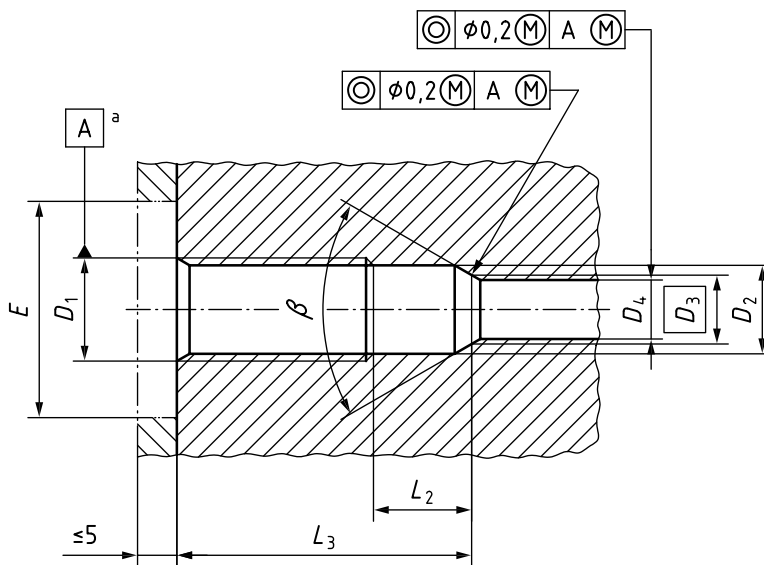

Key

^a Pitch diameter in accordance with ISO 965-1 or ISO 965-3.

NOTE See Table 2 for dimensions.

Figure 2 — Cylinder head housing for M10 glow-plugs
(standards.iteh.ai)

Table 2 — Housing dimensions

ISO 6550-3:2013

Dimensions in millimetres

Glow-plug type	D_1 6H ^a	β $\pm 1^\circ$	D_2	D_3 ref.	D_4^a	E	$L_2^{0}_{-1}$	L_3
A1 to A3	M10 × 1,25	120°	≥ 8,7	7,0	≥ 6,5	≥ 23	9,0	≥ 31,0
A4 to A6							19,0	≥ 41,0
B1 and B4	M10 × 1	90°	≥ 8,8	6,4	≥ 5,5	≥ 20	5,0	≥ 17,0
B2 and B3							7,0	≥ 23,0
C1 to C4	M10 × 1	60°	≥ 8,8	7,0	≥ 6,5	≥ 21	10,0	≥ 31,0

^a The determination of the exact dimension (above the minimum) is to be agreed between glow-plug and engine manufacturers. The clearance between the probe and the cylinder head shall be kept to a minimum.

3.3 Threads

3.3.1 General

The threads of M10 glow-plugs and the corresponding tapped holes in cylinder heads shall be in accordance with ISO 68-1, ISO 261, ISO 965-1, and ISO 965-3.

The thread M10 × 1,25 - 6g shall be used for glow-plugs of type A (but see 3.3.2). The thread in the corresponding tapped holes in the cylinder heads shall be M10 × 1,25 - 6H.

The thread M10 × 1 - 6g shall be used for glow-plugs of types B and C (but see 3.3.3). The thread in the corresponding tapped holes in the cylinder heads shall be M10 × 1 - 6H.

3.3.2 Dimensions limits of thread M10 × 1,25

Dimension limits of thread M10 × 1,25 - 6g are given in [Table 3](#). For existing designs, tolerance class 6e is also permitted. New designs shall be to class 6g.

Table 3 — Dimension limits M10 × 1,25

Dimensions in millimetres

Dimensions		Plug thread (on finished plug)	Tapped hole in cylinder head
		6g	6H
Major diameter	max.	9,972	not specified
	min.	9,760	10,000
Pitch diameter	max.	9,160	9,348
	min.	9,042	9,188
Minor diameter	max.	8,439	8,912
	min.	8,251 ^a	8,647

^a With a root radius $\geq 0,125$ mm (0,1P).

3.3.3 Dimensions limits of thread M10 × 1

Dimension limits of thread M10 × 1 - 6g are given in [Table 4](#). For existing designs, tolerance class 6e is also permitted. New designs shall be to class 6g.

Table 4 — Dimension limits M10 × 1

ISO 6550-3:2013

<https://standards.iteh.ai/catalog/standards/sist/a7cad711-b92a-4131-b7f8-64da6d676194/iso-6550-3-2013>

Dimensions in millimetres

Dimensions		Plug thread (on finished plug)	Tapped hole in cylinder head
		6g	6H
Major diameter	max.	9,974	not specified
	min.	9,794	10,000
Pitch diameter	max.	9,324	9,500
	min.	9,212	9,350
Minor diameter	max.	8,747	9,153
	min.	8,563 ^a	8,917

^a With a root radius $\geq 0,100$ mm (0,1P).

4 Installation tightening torque

The installation tightening torque shall be as given in [Table 5](#). The values apply to new sheath-type glow-plugs without lubricant on the threads. If threads are lubricated, the torque shall be reduced by approximately one-third to avoid overstressing.